

**ISSN 2518-170X (Online)  
ISSN 2224-5278 (Print)**

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ  
ҰЛТТЫҚ ФЫЛЫМ АКАДЕМИЯСЫ

Satbayev University

# **ХАБАРЛАРЫ**

---

## **ИЗВЕСТИЯ**

НАЦИОНАЛЬНОЙ АКАДЕМИИ  
НАУК РЕСПУБЛИКИ  
КАЗАХСТАН  
Satbayev University

## **NEWS**

OF THE ACADEMY OF SCIENCES  
OF THE REPUBLIC OF  
KAZAKHSTAN  
Satbayev University

**SERIES  
OF GEOLOGY AND TECHNICAL SCIENCES**

**3 (459)**  
MAY – JUNE 2023

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK



---

---

*NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.*

Қазақстан Республикасы Үлттық гылым ақадемиясы «ҚР ҰҒА Хабарлары. Геология және техникалық гылымдар сериясы» гылыми журналының Web of Science-тің жсаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрi the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруды. Web of Science зерттеушілер, авторлар, баспашилар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық гылымдар сериясы Emerging Sources Citation Index-ке енүі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық гылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издавателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

### **Бас редактор**

**ЖҰРЫНОВ Мұрат Жұрынұлы**, химия ғылымдарының докторы, профессор, КР ҰҒА академигі, Қазақстан Республикасы Үлттық Ғылым академиясының президенті, АҚ «Д.В. Сокольский атындағы отын, катализ және электрохимия институтының» бас директоры (Алматы, Қазақстан) **H = 4**

### **Ғылыми хатшы**

**АБСАДЫКОВ Бахыт Нарикбайұлы**, техника ғылымдарының докторы, профессор, КР ҰҒА жауапты хатшысы, А.Б. Бектұров атындағы химия ғылымдары институты (Алматы, Қазақстан) **H = 5**

### **Редакциялық алқа:**

**ӘБСАМЕТОВ Мәліс Құдысұлы** (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, КР ҰҒА академигі, «У.М. Ахмедсафина атындағы гидрогеология және геоэкология институтының» директоры (Алматы, Қазақстан) **H = 2**

**ЖОЛТАЕВ Герой Жолтайұлы** (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, К.И. Сатпаев тындағы геология ғылымдары институтының директоры (Алматы, Қазақстан) **H=2**

**СНОУ Дэниел, Ph.D.**, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска штаты, АҚШ) **H = 32**

**ЗЕЛЬТМАН Реймар, Ph.D.**, табиғи тарих мұражайының Жер туралы ғылымдар бөлімінде петрология және пайдалы қазбалар кен орындары саласындағы зерттеулердің жетекшісі (Лондон, Англия) **H = 37**

**ПАНФИЛОВ Михаил Борисович**, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция) **H=15**

**ШЕН Пин, Ph.D.**, Қытай геологиялық қоғамының тау геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастырының мүшесі (Пекин, Қытай) **H = 25**

**ФИШЕР Аксель, Ph.D.**, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **H = 6**

**КОНТОРОВИЧ Алексей Эмильевич**, геология-минералогия ғылымдарының докторы, профессор, РГА академигі, А.А. Трофимука атындағы мұнай-газ геологиясы және геофизика институты (Новосибирск, Ресей) **H = 19**

**АГАБЕКОВ Владимир Енокович**, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жана материалдар химиясы институтының құрметті директоры (Минск, Беларусь) **H = 13**

**КАТАЛИН Стефан**, Ph.D., Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **H = 20**

**СЕЙТМУРАТОВА Элеонора Юсуповна**, геология-минералогия ғылымдарының докторы, профессор, КР ҰҒА корреспондент-мүшесі, К.И. Сатпаев атындағы Геология ғылымдары институты зертханасының ментерушісі (Алматы, Қазақстан) **H=11**

**САҒЫНТАЕВ Жанай**, Ph.D., қауымдастырылған профессор, Назарбаев университеті (Нұр-Сұлтан, Қазақстан) **H = 11**

**ФРАТТИНИ Паоло**, Ph.D., Бикокк Милан университеті қауымдастырылған профессоры (Милан, Италия) **H = 28**

---

**«КР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы».**

**ISSN 2518-170X (Online)**,

**ISSN 2224-5278 (Print)**

Меншіктеуші: «Қазақстан Республикасының Үлттық ғылым академиясы» РКБ (Алматы қ.).  
Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № KZ39VPY00025420 мерзімдік басылым тіркеуіне койылу туралы куәлік.  
Такырыптық бағыты: *геология, мұнай және газды өндегудің химиялық технологиялары, мұнай химиясы, металдарды алу және олардың қосындыларының технологиясы*.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекен-жайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Үлттық ғылым академиясы, 2023

Типографияның мекен-жайы: «Аруна» ЖК, Алматы қ., Мұратбаев көш., 75.

### **Главный редактор**

**ЖУРИНОВ Мурат Журинович**, доктор химических наук, профессор, академик НАН РК, президент Национальной академии наук Республики Казахстан, генеральный директор АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского» (Алматы, Казахстан) **H = 4**

### **Ученый секретарь**

**АБСАДЫКОВ Бахыт Нарикбаевич**, доктор технических наук, профессор, ответственный секретарь НАН РК, Институт химических наук им. А.Б. Бектурова (Алматы, Казахстан) **H = 5**

### **Редакционная коллегия:**

**АБСАМЕТОВ Малис Кудысович**, (заместитель главного редактора), доктор геологоминералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геэкологии им. У.М. Ахмедсафина (Алматы, Казахстан) **H = 2**

**ЖОЛТАЕВ Герой Жолтаевич**, (заместитель главного редактора), доктор геологоминералогических наук, профессор, директор Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **H=2**

**СНОУ Дэниел**, Ph.D, ассоциированный профессор, директор Лаборатории водных наук университета Небраски (штат Небраска, США) **H = 32**

**ЗЕЛЬТМАН Реймар**, Ph.D, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Англия) **H = 37**

**ПАНФИЛОВ Михаил Борисович**, доктор технических наук, профессор Университета Нанси (Нанси, Франция) **H=15**

**ШЕНПИН**, Ph.D, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай) **H = 25**

**ФИШЕР Аксель**, ассоциированный профессор, Ph.D, технический университет Дрезден (Дрезден, Берлин) **H = 6**

**КОНТОРОВИЧ Алексей Эмильевич**, доктор геолого-минералогических наук, профессор, академик РАН, Институт нефтегазовой геологии и геофизики им. А.А. Трофимука СО РАН (Новосибирск, Россия) **H = 19**

**АГАБЕКОВ Владимир Енокович**, доктор химических наук, академик НАН Беларуси, почетный директор Института химии новых материалов (Минск, Беларусь) **H = 13**

**КАТАЛИН Стефан**, Ph.D, ассоциированный профессор, Технический университет (Дрезден, Берлин) **H = 20**

**СЕЙТМУРАТОВА Элеонора Юсуповна**, доктор геолого-минералогических наук, профессор, член-корреспондент НАН РК, заведующая лаборатории Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **H=11**

**САГИНТАЕВ Жанай**, Ph.D, ассоциированный профессор, Назарбаев университет (Нурсултан, Казахстан) **H = 11**

**ФРАТТИНИ Паоло**, Ph.D, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия) **H = 28**

---

**«Известия НАН РК. Серия геологии и технических наук».**

**ISSN 2518-170X (Online)**,

**ISSN 2224-5278 (Print)**

Собственник: Республикаансое общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № KZ39VPY00025420, выданное 29.07.2020 г.

Тематическая направленность: *геология, химические технологии переработки нефти и газа, нефтехимия, технологии извлечения металлов и их соединений.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, оф. 219, тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2023

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75.

### **Editorial chief**

**ZHURINOV Murat Zhurinovich**, doctor of chemistry, professor, academician of NAS RK, president of the National Academy of Sciences of the Republic of Kazakhstan, general director of JSC "Institute of fuel, catalysis and electrochemistry named after D.V. Sokolsky" (Almaty, Kazakhstan) **H = 4**

### **Scientific secretary**

**ABSADYKOV Bakhyt Narikbaevich**, doctor of technical sciences, professor, executive secretary of NAS RK, Bekturov Institute of chemical sciences (Almaty, Kazakhstan) **H = 5**

### **E d i t o r i a l b o a r d:**

**ABSAMETOV Malis Kudysovich**, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, academician of NAS RK, director of the Akhmedsafin Institute of hydrogeology and hydrophysics (Almaty, Kazakhstan) **H=2**

**ZHOLTAEV Geroy Zholtaevich**, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, director of the institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=2**

**SNOW Daniel**, Ph.D, associate professor, director of the laboratory of water sciences, Nebraska University (Nebraska, USA) **H = 32**

**ZELTMAN Reymar**, Ph.D, head of research department in petrology and mineral deposits in the Earth sciences section of the museum of natural history (London, England) **H = 37**

**PANFILOV Mikhail Borisovich**, doctor of technical sciences, professor at the Nancy University (Nancy, France) **H=15**

**SHEN Ping**, Ph.D, deputy director of the Committee for Mining geology of the China geological Society, Fellow of the American association of economic geologists (Beijing, China) **H = 25**

**FISCHERAxel**, Ph.D, associate professor, Dresden University of technology (Dresden, Germany) **H = 6**

**KONTOROVICH Aleksey Emilievich**, doctor of geological and mineralogical sciences, professor, academician of RAS, Trofimuk Institute of petroleum geology and geophysics SB RAS (Novosibirsk, Russia) **H = 19**

**AGABEKOV Vladimir Enokovich**, doctor of chemistry, academician of NAS of Belarus, honorary director of the Institute of chemistry of new materials (Minsk, Belarus) **H = 13**

**KATALIN Stephan**, Ph.D, associate professor, Technical university (Dresden, Berlin) **H = 20**

**SEITMURATOVA Eleonora Yusupovna**, doctor of geological and mineralogical sciences, professor, corresponding member of NAS RK, head of the laboratory of the Institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=11**

**SAGINTAYEV Zhanay**, Ph.D, associate professor, Nazarbayev University (Nursultan, Kazakhstan) **H = 11**

**FRATTINI Paolo**, Ph.D, associate professor, university of Milano-Bicocca (Milan, Italy) **H = 28**

---

**News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Owner: RPA «National Academy of Sciences of the Republic of Kazakhstan» (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan No. **KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *geology, chemical technologies for oil and gas processing, petrochemistry, technologies for extracting metals and their connections.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, Almaty, 050010, tel. 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

---

© National Academy of Sciences of the Republic of Kazakhstan, 2023

Address of printing house: ST «Aruna», 75, Muratbayev str, Almaty.

NEWS of the National Academy of Sciences of the Republic of Kazakhstan

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 3, Number 459 (2023), 60–69

<https://doi.org/10.32014/2023.2518-170X.299>

IRSTI: 52.47.17

© K.S. Zaurbekov<sup>1\*</sup>, S.A. Zaurebkov<sup>1</sup>, A.V. Sladkovsky<sup>2</sup>, D.Y. Balgayev<sup>1</sup>, 2023

<sup>1</sup>Satbayev University, Kazakhstan, Almaty city;

<sup>2</sup>Silesian University of Technology, Poland, Katowice city.

E-mail: [kadmen.95@mail.ru](mailto:kadmen.95@mail.ru)

## HYDRODYNAMIC SIMULATION OF THE STEAM-ASSISTED GRAVITY DRAINAGE METHOD FOR DIFFERENT RESERVOIR THICKNESSES USING ECLIPSE

**Zaurbekov K.S.** — Master of Technical Sciences, doctoral student of Satbayev University. Department of Petroleum Engineering (Almaty, Kazakhstan)

E-mail: [kadmen.95@mail.ru](mailto:kadmen.95@mail.ru), <https://orcid.org/0000-0001-7425-7448>;

**Zaurbekov S.A.** — Candidate of Technical Sciences. Professor of Satbayev University Department of Technological Machines and Transport (Almaty, Kazakhstan)

E-mail: [s.zaurbekov@mail.ru](mailto:s.zaurbekov@mail.ru), <https://orcid.org/0000-0001-8025-0824>;

**Sladkovsky A.V.** — doctor of technical sciences, professor of Silesian University of Technology, (Poland, Katowice)

[orcid.org/0000-0002-1041-4309](https://orcid.org/0000-0002-1041-4309);

**Balgayev D.Y.** — Master of Engineering and Technology. Doctoral student of the Department of Technological Machines and Transport, Satbayev University (Almaty, Kazakhstan)

E-mail: [dos\\_mjk@mail.ru](mailto:dos_mjk@mail.ru), <https://orcid.org/0000-0001-9278-7653>.

**Abstract.** The Steam-Assisted Gravity Drainage (SAGD) method is one of the most effective methods of oil recovery from low-permeability reservoirs with high-viscosity oil. Particularly for productive reservoirs with thicknesses of 25 and 30 meters, the SAGD method may be successfully applied under certain conditions. One of the main advantages of the SAGD method is the capability to recover oil from thin reservoirs that were previously inaccessible for production. In addition, the SAGD method may significantly boost the oil production ratio and minimize the negative impact on the environment, since it requires fewer wells than conventional production methods. However, the application of the SAGD method also has its limitations and drawbacks. In particular, the method requires considerable initial investment, as well as high-energy intensity. In addition, the SAGD method may not be effective under certain geological settings, such as a rough reservoir surface and the presence of geological checks. Thus, the successful application of the SAGD method for productive reservoirs with thicknesses of 25 and 30 meters requires a thorough study of the geological, hydrodynamic and economic conditions of the field. Besides, a detailed simulation of the SAGD process employing custom-made software tools, such as Eclipse, should be performed to optimize process parameters and maximize oil production.

**Keywords:** high-viscosity oil, bitumens, thermal methods, hydrodynamic simulation, ECLIPCE, SAGD

The article was prepared within the framework of the Global Fund under project No. AP09261282 "Increasing the service life of pumps of sucker rod pumping units"

© К.С. Заурбеков<sup>1\*</sup>, С.А. Зауребков<sup>1</sup>, А.В. Сладковский<sup>2</sup>, Д.Е. Балгаев<sup>1</sup>, 2023

<sup>1</sup>Сәтбаев университеті, Қазақстан, Алматы;

<sup>2</sup>Силезия технологиялық университеті, Польша, Катовице.

E-mail: [kadmen.95@mail.ru](mailto:kadmen.95@mail.ru)

## ECLIPSE ПАЙДАЛАНУ АРНАЛҒАН ӨНІМДІ ПРОГРАММАЛАРДЫҢ ТҮРЛІ ҚАЛАНДЫҚТАРЫНДАҒЫ БУ ГРАВИТАЦИЯЛЫҚ ДРЕНАЖ ӘДІСІН ГИДРОДИНАМИЯЛЫҚ СИМУЛАУ

**Заурбеков К.С.** — техника ғылымдарының магистрі, Сәтбаев университетінің мұнай өнеркәсібі кафедрасының докторантты (Алматы, Қазақстан)

E-mail: [kadmen.95@mail.ru](mailto:kadmen.95@mail.ru), <https://orcid.org/0000-0001-7425-7448>;

**Заурбеков С.А.** — техника ғылымдарының кандидаты, Сәтбаев университетінің «Технологиялық машиналар және көлік» кафедрасының профессоры (Алматы, Қазақстан)

E-mail: [s.zaurbekov@mail.ru](mailto:s.zaurbekov@mail.ru), <https://orcid.org/0000-0001-8025-0824>;

**Сладковский А.В.** — техника ғылымдарының докторы, Силезия технологиялық университетінің профессоры, (Польша, Катовице)

[orcid.org/0000-0002-1041-4309](https://orcid.org/0000-0002-1041-4309);

**Балгаев Д.Е.** — техника және технология магистрі, "Технологиялық машиналар және көлік" кафедрасының докторантты, Satbayev University (Алматы қ., Қазақстан)

E-mail: [dos\\_mjk@mail.ru](mailto:dos_mjk@mail.ru), <https://orcid.org/0000-0001-9278-7653>.

**Аннотация.** Бу гравитациялық мұнай дренажы (SAGD) тығыз және тұтқыр қабаттардан мұнайды алуудың ең тиімді әдістерінің бірі болып табылады. Атап айтқанда, қалындығы 25 және 30 метр болатын су қоймалары үшін SAGD әдісі белгілі бір жағдайларда сәтті қолданылуы мүмкін. SAGD әдісінің негізгі артықшылықтарының бірі - бұрын пайдалану мүмкін болмаған жүқа қабаттардан мұнай алу мүмкіндігі. Сонымен қатар, SAGD әдісі мұнай өндіру жылдамдығын айтарлықтай арттырып, қоршаған ортаға теріс әсерді азайта алады, өйткені ол дәстүрлі өндіру әдістеріне қарағанда аз ұнғымаларды қажет етеді. Дегенмен, SAGD әдісін қолданудың шектеулері мен кемшіліктері де бар. Мысалы, әдіс бастапқы кезеңде айтарлықтай инвестицияларды, сондай-ақ жогары энергия сыйымдылығын талап етеді. Сонымен қатар, SAGD әдісі кейбір геологиялық жағдайларда тиімді болмауы мүмкін, мысалы, қабат бетінің біркелкі еместігі және геологиялық кедегілердің болуы. Осылайша, қалындығы 25 және 30 метр болатын су қоймалары үшін SAGD әдісін сәтті қолдану үшін кен орнының геологиялық, гидродинамикалық және экономикалық жағдайларын мұқият зерделеу қажет. Сонымен қатар, Eclipse сияқты арнайы бағдарламалық құралдарды пайдалана отырып, SAGD процесін егжей-тегжейлі модельдеу процесс параметрлерін онтайландыру және мұнай беруді барынша арттыру үшін қажет.

**Түйін сөздер:** тұтқырлығы жоғары мұнай, битум, термиялық әдістер, гидродинамикалық модельдеу, ECLIPCE, SAGD

© К.С. Заурбеков<sup>1\*</sup>, С.А. Заурбеков<sup>1</sup>, А.В. Сладковский<sup>2</sup>, Д.Е. Балгаев<sup>1</sup>, 2023

<sup>1</sup>Satbayev University, Казахстан, Алматы;

<sup>2</sup>Silesian University of Technology, Польша, Катовице.

E-mail: [kadmen.95@mail.ru](mailto:kadmen.95@mail.ru)

## **ГИДРОДИНАМИЧЕСКОЕ МОДЕЛИРОВАНИЕ МЕТОДА ПАРОГРАВИТАЦИОННОГО ДРЕНИРОВАНИЯ ДЛЯ РАЗНЫХ ТОЛЩИН ПРОДУКТИВНОГО ПЛАСТА С ПРИМЕНЕНИЕМ ECLIPSE**

**Заурбеков К.С.** — магистр технических наук, докторант Сатпаев Университета кафедры Нефтяная инженерия (г.Алматы, Казахстан)

E-mail: [kadmen.95@mail.ru](mailto:kadmen.95@mail.ru), <https://orcid.org/0000-0001-7425-7448>;

**Заурбеков С.А.** — кандидат технических наук, профессор Сатпаев Университета кафедры Технологических машин и транспорта (г.Алматы, Казахстан)

E-mail: [s.zaurbekov@mail.ru](mailto:s.zaurbekov@mail.ru), <https://orcid.org/0000-0001-8025-0824>;

**Сладковский А.В.** — доктор технических наук, профессор Silesian University of Technology, (Польша, г.Катовице)

[orcid.org/0000-0002-1041-4309](https://orcid.org/0000-0002-1041-4309);

**Балгаев Д.Е.** — магистр техники и технологии, докторант кафедры «Технологические машины и транспорт», Satbayev University (г. Алматы, Казахстан)

E-mail: [dos\\_mjk@mail.ru](mailto:dos_mjk@mail.ru), <https://orcid.org/0000-0001-9278-7653>.

**Аннотация.** Метод парогравитационного дренажа нефти (SAGD) является одним из наиболее эффективных методов добычи нефти из низкопроницаемых пластов с высоковязкой нефтью. В частности, для продуктивных пластов с толщинами 25 и 30 метров метод SAGD может быть успешно применен при определенных условиях. Одним из основных преимуществ метода SAGD является возможность добычи нефти из тонких пластов, которые ранее были недоступны для эксплуатации. Кроме того, метод SAGD может значительно увеличить коэффициент добычи нефти и сократить негативное воздействие на окружающую среду, так как он требует меньше скважин, чем традиционные методы добычи. Однако применение метода SAGD также имеет свои ограничения и недостатки. Например, метод требует значительных инвестиций на начальном этапе, а также высокой энергоемкости. Кроме того, метод SAGD может быть неэффективен при некоторых геологических условиях, таких как неровная поверхность пласта и наличие геологических препятствий. Таким образом, для успешного применения метода SAGD для продуктивных пластов с толщинами 25 и 30 метров, необходимо тщательно изучить геологические, гидродинамические и экономические условия месторождения. Кроме того, необходимо провести детальное моделирование процесса SAGD с использованием специализированных программных инструментов, таких как Eclipse, для оптимизации параметров процесса и максимизации добычи нефти.

**Ключевые слова:** высоковязкая нефть, битумы, тепловые методы, гидродинамическое моделирование, ECLIPCE, SAGD

## Introduction

There are considerable challenges in the global oil and gas industry to actively develop huge reserves of high-viscosity oils and bitumens. Reserves of light oils are gradually depleted and there is a need for maximum possible recovery of high-viscosity oils and bitumens to replenish and strengthen the resource base of the fuel and energy complex.

Experience in developing fields of high-viscosity oils and bitumens has shown that the most effective and feasible recovery methods for heavy oils are thermal methods.

By now the global oil industry is developing rapidly and at a tremendous pace, new methods and technologies for recovery of heavy oils are appearing, making our options vast when choosing thermal methods for a particular field. Thus, some of the main and frequently used methods of thermal treatment are as follows: - steam-treatment, - in-situ combustion, - hot water injection, - steam-cyclic treatment of bottomhole zones of producing wells and combination of these methods with other physical and chemical methods (combined methods) (McLennan et al., 2006).

As evidenced in practice, the most widespread of all known arsenal of thermal methods are technologies, the essence of which is based on the heat transfer agent injection into the reservoir: the reservoir stimulation by pattern steam injection and steam-cycling treatment of producing wells.

Due to the above-mentioned technologies about 80 % of all high-viscosity oils and bitumens are produced in the world via state-of-the-art enhanced oil recovery methods (Karazhanova et al., 2023).

In order to select the optimal method of thermal treatment of the pay zone, it is necessary to study the geological and production characteristics of the productive reservoir, build a model of the reservoir, and calculate the expected well rates in the SAGD method for different reservoir thicknesses (Gotawala et al., 2010).

Meanwhile, it is necessary to build a model of the well, calculate its profile, and determine the length of the horizontal section to employ the SAGD method.

## Methods

The mathematical model built in the Eclipse program allows determining the state of the simulated process at any time by its known initial state. By setting a change of this or that parameter, it is possible to draw conclusions about its overall effect on the process (Birrell et al., 2000).

In order to build a hydrodynamic model, the candidates of X field, characterized by high values of density and viscosity of oil, were selected. The characteristics of 2 productive reservoirs with a thickness of 25 and 30 m to build a hydrodynamic model were as follows:

- the density of oil is about  $915 \text{ kg/m}^3$ ;
- the reservoir waters are of the calcium chloride type with a density of  $1.095 \text{ g/cm}^3$  and mineralization of  $95 \text{ g/l}$ ;

- the oil viscosity is 5.6 Pa\*s, i.e. the oil in the field belongs to ultra-viscous.

The characteristics of a productive reservoir are as follows:

- the vertical thickness of pay zone is 25 and 30 m at depths of 903–936 m;

- the reservoir is composed of irregularly alternating sandy-siltstone and clayey rocks;

- pay zones in the field are represented by sandstones and siltstones, with a porosity of 23–29 % (open porosity);

- the permeability of rocks is 1500 mD;

- oil saturation factor is 0.5–0.6;

- the gas saturation factor is 0.32–0.69;

- initial reservoir pressure in reservoirs is 2.0–2.5 MPa;

- temperature is 25–35°C;

- oil flow rates are 26.4–62.1 m<sup>3</sup>/day.

Based on the set objectives, the first stage was built a mathematical model in the Eclipse program, which allows determining the state of the simulated process at any time by its known initial state (Chan et al., 2012). At the second stage according to SAGD method, the process of injection of highly heated steam into productive reservoir was simulated with the following injection regime: — steam temperature - 300°C, steam injection volume — 1600 kg/hour, for 15 days (Gladkov et al., 2012). By setting a change of one or another parameter in the ECLIPSE program, it is quite possible to draw conclusions about its effect on the process occurring in the reservoir as a whole (Zhao et al., 2013).

We used the ECLIPSE 2003A\_1 program version to build models (Schlumberger, ECLIPSE – 2003). In this program version, the following innovations are used to build the well model:

— Steam Assisted Gravity Drainage (SAGD) technology option is implemented, which allows determining the injection capacity of well, depending on the selection of neighboring wells of the scheme. This option is controlled by the WCONINJP keyword;

— connection D-factors for the inflow-dependent skin factor can be calculated from the expression defined by the WDFACCOR keyword. This expression is based on the correlation of the inertial resistance coefficient, which depends on the permeability and porosity of the connected grid units;

— wells and groups can now control their heat rate with new control modes and values/ limits in the WCONPROD and GCONPROD keywords. The molar thermal equivalents must be defined with the CALVAL keyword before applying the new control mode;

— the WINJMULT keyword can now be employed to enter multipliers for injection wells changing along with their bottomhole pressure value, or wellbore pressure adjacent to individual junctions.


Calculated hydrodynamic models of the SAGD method were built for productive reservoirs with vertical thickness of pay zone of 25 and 30 m and flow rate planning for the operation period of 10 years (Zhao et al., 2014).

## **Results and Discussion**

The oil saturation growth model shown in Figure 1a after the SAGD process shows


a significant increase in oil saturation over time (the red zone turns to yellow and then to blue).

Figure 1b shows the growth of reservoir rock temperature surrounding the steam chamber in the reservoir, which allows concluding that the temperature of the productive reservoir increases over time and has a positive effect on reducing oil viscosity and increasing the oil recovery factor (ORF) - the blue zone gradually turns into red.

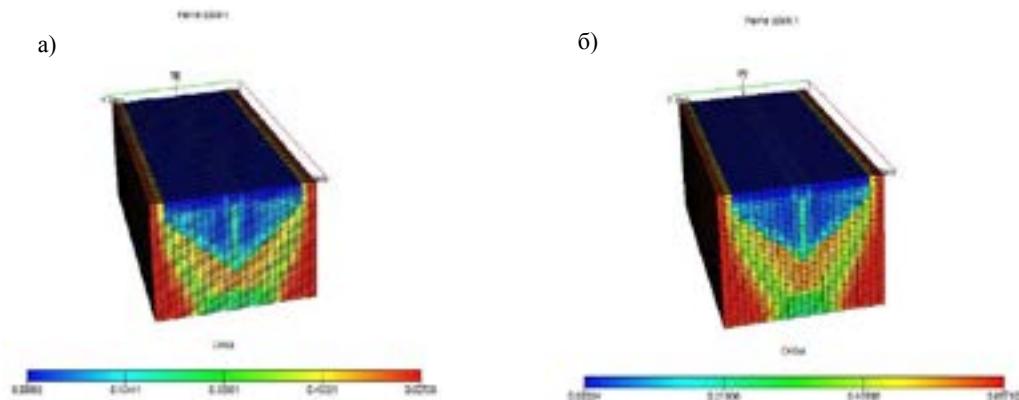

- growth of oil saturation in the reservoir at  $h = 25$  m (a) and at  $h = 30$  m (b).

*Fig. 1 - Computational model of oil saturation growth for productive reservoirs at  $h = 25$  m and  $h = 30$  m*

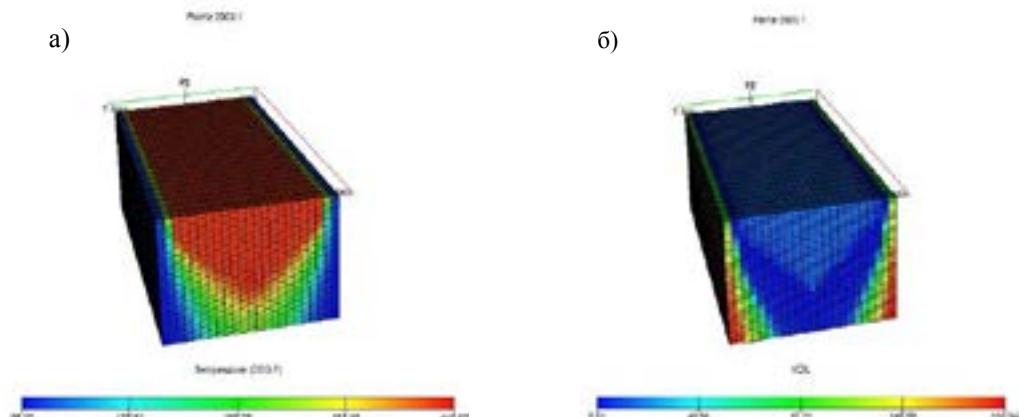


- visualization of steam chamber impact on the productive reservoir at  $h = 25$  m (a) and at  $h = 30$  m (b)

*Fig. 2 - Visualization of oil volume change process under the steam impact at  $h = 25$  m and  $h = 30$  m*


From the analysis of reservoir models, shown in Figure 2, it follows that the oil viscosity of the productive reservoir decreases significantly during the exposure time (the red zone gradually turns into a blue zone) and the heating of the reservoir zone increases, which positively affects both reducing oil viscosity and increasing the oil recovery factor.

From the graph in Figure 3a it follows that the total heat loss increases over time (blue and green lines) due to an increase in the steam chamber and, consequently, the heating area of the cap rock. Heating the upper part of the reservoir to the temperature of steam is undesirable because of the high heat loss in the surface, as well as because of the high heat requirements of the chamber. Losses in the covering layers also increase due to the fact that the steam chamber advances under the side of the reservoir roof and all the generated heat goes to heating the cap rock and the bare zone above the oil-saturated reservoir.

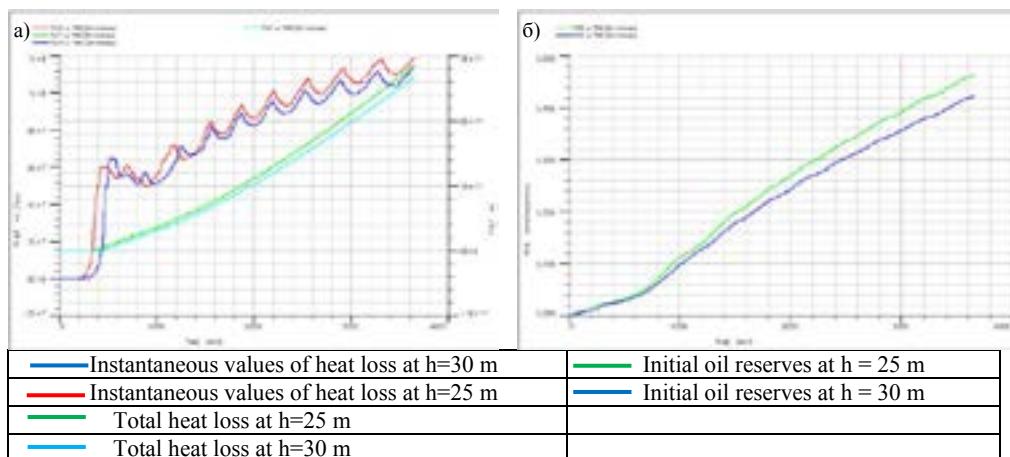

*Fig.3 - Total heat loss and instantaneous heat loss (a)  
and initial oil reserves (b) at  $h = 25$  and  $30\text{ m}$*

In 10 years the ORF will reach a value of 0.36, which follows from the graph in Figure 3b (Butler et al., 1985). The graph corresponds to the graph built according to Butler theory (Butler et al., 1994) (Figure 4a).

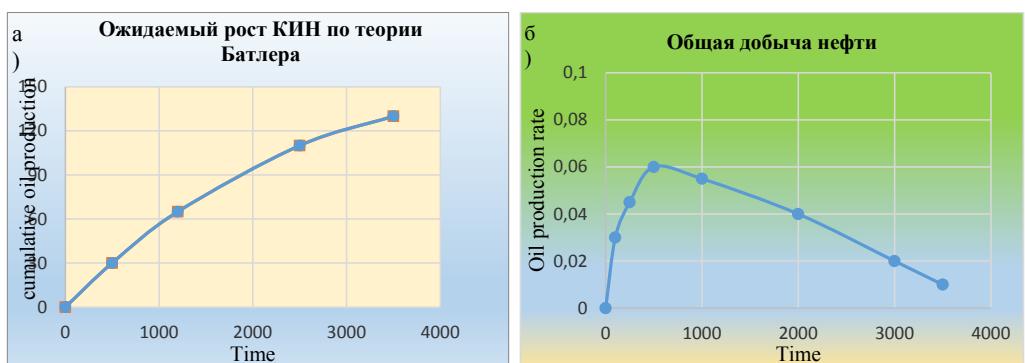

*Fig.4 - Expected growth of ORF (a) and total oil production (b) according to Butler theory*

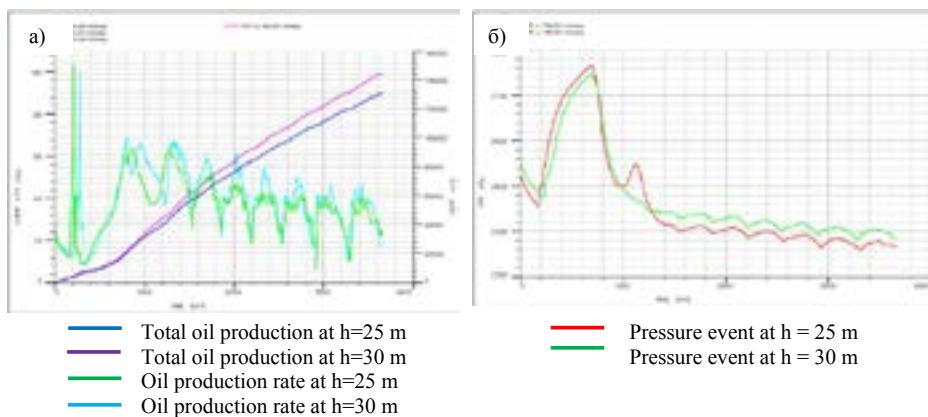


Fig. 5 - Oil production rate and total water production (a) and pressure event (b)  
at  $h = 25$  and  $h = 30$  m

Numerical results from Graph 5a predict the typical three stages of SAGD, i.e., the steam chamber while Butler theory captures only steam chamber growth and oil production decline after reaching a peak, when the steam chamber extends vertically to the top of the pay zone (Zhao et al., 2013). It has been observed that oil production rate curves show significant fluctuations, especially in the early stages of steam injection. This is probably due to frequent phase changes in the unit grid near the well area (Shin et al., 2007).

The Graph 5b shows the dependence of total oil production on the time of field development. Upon completion of all phases of field development, we determine the total production based on this graph. It is known that with increasing the period of field operation there is a decrease in reservoir pressure and the transition from the free-flow production method of the field to the pumping method, this process is well reflected in Graph 5b.

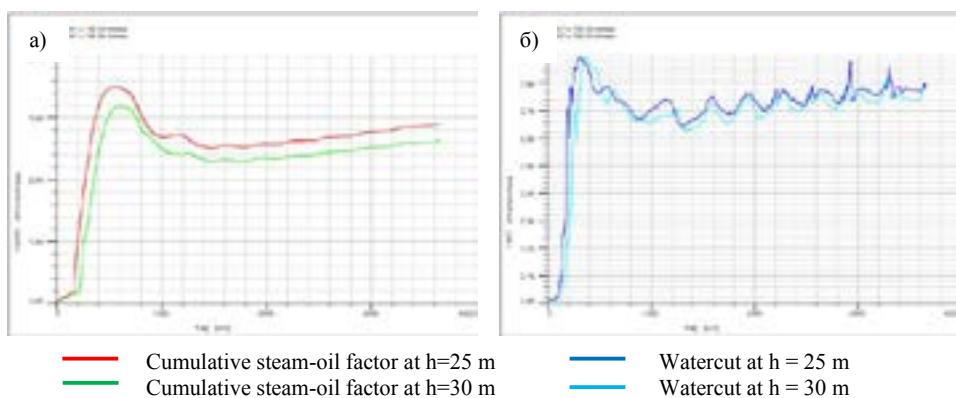


Fig. 6 - Cumulative steam-oil factor (a) and watercut (b) at  $h = 25$  and  $30$  m

Fig. 6 - Cumulative steam-oil factor (a) and watercut (b) at  $h = 25$  and  $30$  m

The increase in the steam-oil factor does not begin immediately with the injection of steam, but there is a gradual increase in its effect on the increase in oil production, as shown in the graph in Figure 6a.

As follows from the analysis of data shown in Figure 6b, when carrying out technological SAGD operations, the water cut of wells increases slightly from 0.55 to 0.75, which is due to a high degree of oil steam energy transfer and steam condensation at the boundary of the steam chamber.

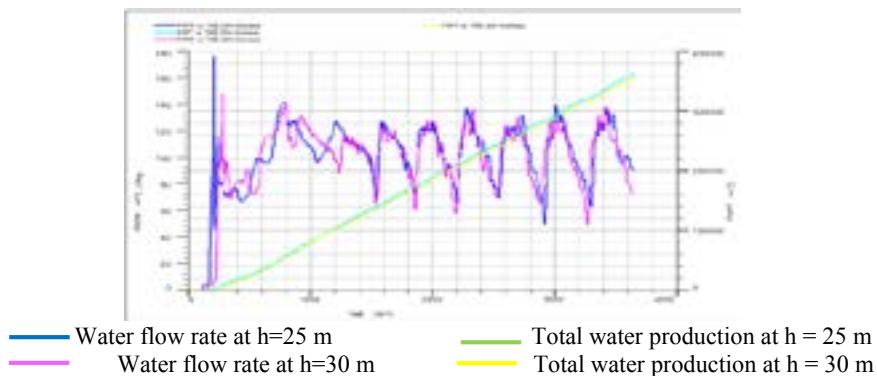


Fig. 7 - Water flow rate and total water production at  $h = 25$  and  $30$  m

Water flow rate during technological SAGD operations fluctuates in a significant amplitude in the initial period of time, and then the value of the water flow rate, significantly reduced and stabilized over time. Since the main source of steam in SAGD is water, the growth of its extraction over time is quite logical. The graph in Figure 7 shows that the growth of the volume of extracted water grows linearly over time.

### Conclusion

The Steam-Assisted Gravity Drainage (SAGD) method is one of the thermal methods for increasing oil and gas production from low-permeability reservoirs with viscous oil. The method is based on the use of high-temperature steams to reduce oil viscosity and increase its mobility, which contributes to increased production.

The developed method of simulation in the ECLIPCE program allows to:

- preliminary evaluate the effectiveness of the SAGD method for the development of low-capacity productive reservoirs with high-viscosity oil;
- trace the process of high-viscosity oil heating in the reservoir and display the distribution of highly heated steam over time;
- determine the initial heat loss and initial oil reserves in the reservoir;
- calculate the expected ORF for a specified period of time;
- predict the rate of oil and water production, as well as pressure events in the reservoir;
- set the expected steam-oil factor and watercut of productive wells over time;
- obtain the expected water flow rate and total water production over time.

When simulating SAGD for different thicknesses of productive reservoirs, it

is necessary to keep in mind that the SAGD process may be more effective for thin reservoirs than for thick ones. Thick formations may require the use of more wells and more steam generators to achieve the desired efficiency.

Thus, the hydrodynamic simulation of the Steam-Assisted Gravity Drainage method for different thicknesses of productive reservoirs using Eclipse is a complex and multi-parameter process, which requires the preparation of a geological model, determining the physical parameters of the reservoir.

#### REFERENCES

- McLennan J.A., Deutsch C.V., Garner D., Wheeler T.J., Richy Richy J.F., and Mus E., 2006 — *McLennan J.A., Deutsch C.V., Garner D., Wheeler T.J., Richy Richy J.F., and Mus E.* ‘Permeability Modeling for the SAGD Process using Minimodels’, SPE 103083, SPE Ann. Tech. Conf. and Exh., Texas, USA.
- Karazhanova M.K., Zhetekova L.B., Abbasova S.V., Aghayeva K.K., Sabyrbaeva G.S., 2023 — *Karazhanova M.K., Zhetekova L.B., Abbasova S.V., Aghayeva K.K., Sabyrbaeva G.S.* Study of interrelations between composition and properties of high-viscous oil. News of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences, ISSN 2224-5278 Volume 1, 457 – Pp. 92–101, <https://doi.org/10.32014/2023.2518-170X.261>.
- Gotawala D.R. and Gates I.D., 2010 — *Gotawala D.R. and Gates I.D.* On the Impact of Permeability Heterogeneity on SAGD steam chamber growth. Natural Resource Research 19(2). Pp. 151–164, 2010. DOI: [10.1007/s11053-010-9114-0](https://doi.org/10.1007/s11053-010-9114-0).
- Birrell G.E. and Putnam P.E., 2000 — *Birrell G.E. and Putnam P.E.* ‘A study of the Influence of Reservoir Architecture on SAGD steam chamber Development at the Underground Test Facility, Northeaster Alberta, Canada, Using a Graphical Analysis of Temperature Profiles’, Paper. 2000-104. CIPC., Calgary Canada, <https://doi.org/10.2118/2000-104>.
- Chan S., Chen Z. and Dong M., 2012 — *Chan S., Chen Z. and Dong M.* Experimental and numerical study of primary water mobility in bitumen reservoirs and its impact on SAGD. J Petrol Sci&Eng. Pp. 92-93, 30–39, <https://doi.org/10.1016/j.petrol.2012.06.008>.
- Gladkov E.A., 2012 — *Gladkov E.A.* Geological and hydrodynamic modeling of oil and gas fields. Tutorial. Tomsk, TPU publishing house, 2012, 84 p. (in Russ.).
- Zhao D.W., Wang J., Gates I.D., 2013 — *Zhao D.W., Wang J., Gates I.D.* Optimized solventaided steam-flooding strategy for recovery of thin heavy oil reservoirs, Fuel 112. Pp. 50–59. <https://doi.org/10.1016/j.fuel.2013.05.025>.
- Schlumberger, ECLIPSE. Reference guide. Version 003\_1. 2003. – 2030 p.
- Zhao D.W., Wang J., Gates I.D., 2014 — *Zhao D.W., Wang J., Gates I.D.* Thermal recovery strategies for thin heavy oil reservoirs, Fuel 117. Pp. 431–441. <https://doi.org/10.1016/j.fuel.2013.09.23>.
- Butler R.M., 1985 — *Butler R.M.* A new approach to the modelling of steam-assisted gravity drainage, J. Can. Pet. Technol. 24, 03. Pp. 42–51. <https://doi.org/10.2118/85-03-01>.
- Butler R.M., 1994 — *Butler R.M.* Steam-assisted gravity drainage: concept, development, performance and future, J. Can. Pet. Technol. 33, 2. Pp. 44–50. <https://doi.org/10.2118/94-02-05>.
- Zhao D.W., Wang J., Gates I.D., 2013 — *Zhao D.W., Wang J., Gates I.D.* Optimized solventaided steam-flooding strategy for recovery of thin heavy oil reservoirs, Fuel 112. Pp. 50–59. <https://doi.org/10.1016/j.fuel.2013.05.025>.
- Shin H. and Polikar M., 2007 — *Shin H. and Polikar M.* ‘Review of Reservoir Parameters to Optimize SAGD and Fast-SAGD Operating Conditions’, JCPT, PETSOC-07-01-04. Vol. 46, <https://doi.org/10.2118/07-01-04>.

## CONTENTS

<b>D.K. Akhmetkanov, M.Zh. Bitimbayev, V. Lozynskyi, K.B. Rysbekov, B.B. Amralinova</b> NEW VARIANTS FOR WIDE OREBODIES HIGH-CAPACITY MINING SYSTEMS WITH CONTROLLED AND CONTINUOUS IN-LINE STOPING.....	6
<b>F.A. Akhundov, M. Sarbopeeva, R. Bayamirova, A. Togasheva, A. Zholbasarova</b> ON THE ISSUE OF PREPARING THE WELLBORE FOR ITS FASTENING.....	22
<b>A.M. Baikadamova, Y.I. Kuldeyev</b> GEOLOGICAL STRUCTURE OF THE ZHARKENT THERMAL GROUNDWATER DEPOSIT BY THE EXAMPLE OF WELL 3-T.....	35
<b>A.A. Yerzhan, P.V. Boikachev, B.R. Nakisbekova, Z.D. Manbetova, P.A. Dunayev</b> METHOD OF SYNTHESIS OF MATCHING TELECOMMUNICATION DEVICES BASED ON THE METHOD OF REAL FREQUENCIES FOR 5G ANTENNAS IN A DISTRIBUTED ELEMENT BASIS.....	47
<b>K.S. Zaurbekov, S.A. Zaurebkov, A.V. Sladkovsky, D.Y. Balgayev</b> HYDRODYNAMIC SIMULATION OF THE STEAM-ASSISTED GRAVITY DRAINAGE METHOD FOR DIFFERENT RESERVOIR THICKNESSES USING ECLIPSE.....	60
<b>A.T. Ibrayev, D.A. Aitimova</b> A METHOD FOR ACCOUNTING THE IMPACT OF ERRORS ON THE QUALITY OF ANALYTICAL INSTRUMENTS AND OPTIMAL CONTROL SYSTEMS.....	70
<b>I.G. Ikramov, G.I. Issayev, N.A. Akhmetov, SH.K. Shapalov, K.T. Abdraimova</b> RECYCLING OF PRODUCTION WASTE AND ENVIRONMENTAL IMPACT ASSESSMENT.....	80
<b>J.A. Ismailova, A.R. Khussainova, Luis E. Zerpa, D.N. Delikesheva, A.A. Ismailov</b> A NEW PREDICTIVE THERMODYNAMIC MODEL OF PARAFFIN FORMATION WITH THE CALCULATION OF THE MATHEMATICAL ORIGIN OF THE POYNING CORRECTION FACTOR.....	96
<b>Zh.S. Kenzhetaev, K.S. Togizov, A.K. Omirgali, E.Kh. Aben, R.Zhalikzyz</b> INTENSIFICATION OF INHIBITOR-ASSISTED URANIUM ISL PROCESS.....	108
<b>M.A. Li, T.T. Ibrayev, N.N. Balgabayev, B.S. Kali, D.A. Toleubek</b> SIMULATION AND OPTIMIZATION MODELING OF WATER USE MANAGEMENT IN IRRIGATION SYSTEMS.....	119
<b>A.S. Madibekov, L.T. Ismukhanova, A.O. Zhadi, A. Mussakulkyzy, K.M. Bolatov</b> RANKING THE TERRITORY OF THE ALMATY AGGLOMERATION ACCORDING TO THE DEGREE OF POLLUTION.....	130
<b>E.K. Merekeyeva, K.A. Kozhakhmet, A.A. Seidaliyev</b> CHARACTERISTICS OF THE STRUCTURAL UPLIFTS OF KURGANBAI AND BAYRAM-KYZYLADYR LOCATED WITHIN THE ZHAZGURLI DEPRESSION.....	149
<b>R.N. Moldasheva, N.K. Shazhdekeyeva, G. Myrzagereikzy, V.E. Makhatova, A.M. Zadagali</b> MATHEMATICAL FOUNDATIONS OF ALGORITHMIZATION OF WATER POLLUTION MODELING PROCESSES.....	164
<b>Y.G. Neshina, A.D. Mekhtiyev, A.D. Alkina, P.A. Dunayev, Z.D. Manbetova</b> HARDWARE-SOFTWARE COMPLEX FOR IDENTIFICATION OF ROCK DISPLACEMENT IN PITS.....	180

<b>M.B. Nurpeisova, Z.A. Yestemesov, V.G. Lozinsky, A.A. Ashimova, S.S. Urazova</b> INDUSTRIAL WASTE RECYCLING – ONE OF THE KEY DIRECTIONS OF BUSINESS DEVELOPMENT.....	193
<b>B. Orazbayev, M. Urazgaliyeva, A. Gabdulova, Zh. Moldasheva, Zh. Amanbayeva</b> METHODS OF MULTI-CRITERIA SELECTION IN PETROLEUM GEOLOGY UNDER CONDITIONS OF FUZZY INITIAL DATA.....	206
<b>B.R. Rakishev, A.A. Orynbay, A.B. Mussakhan</b> AUTOMATED FORECASTING OF THE PARTICLE SIZE COMPOSITION OF BLASTED ROCKS DURING BLASTHOLE DRILLING IN HORIZONTAL UNDERGROUND WORKINGS.....	222
<b>Y.Sh. Seithaziyev</b> GEOCHEMICAL STUDIES OF CONDENSATE, GAS AND CORE SAMPLES DERIVED FROM GAS-CONDENSATE FIELDS IN THE MOYNKUM SAG (KAZAKHSTAN).....	242
<b>E.Yu. Seitmuratova, R.T. Baratov, F.F. Saidasheva, V.S. Goryaeva, M.A. Mashrapova, Ya.K. Arshamov</b> TO STUDY THE RING STRUCTURES OF CENTRAL AND SOUTHERN KAZAKHSTAN AND THEIR ORE CONTENT.....	262
<b>J.B. Toshov, Sh.R. Malikov, O.S. Ergashev, A.K. Sherov, A. Esirkepov</b> IMPROVING THE EFFICIENCY OF THE PROCESS OF DRILLING WELLS IN COMPLEX CONDITIONS AT GEOLOGICAL PROSPECTING SITES.....	282
<b>V.A. Tumlert, Zh.K. Kasymbekov, R.A. Dzhaisambekova, E.V. Tumlert, B Sh. Amanbayeva</b> INFLUENCE OF THE HYDROGEOLOGICAL MODE OF OPERATION ON THE CHARACTER OF COLLATING OF THE FILTER AND THE FILTER ZONE OF SEASONAL WELLS.....	295

## **Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct ([http://publicationethics.org/files/u2/New\\_Code.pdf](http://publicationethics.org/files/u2/New_Code.pdf)). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

**www:nauka-nanrk.kz**  
**<http://www.geolog-technical.kz/index.php/en/>**  
**ISSN 2518-170X (Online),**  
**ISSN 2224-5278 (Print)**

Заместитель директора отдела издания научных журналов НАН РК *Р. Жөліқызы*

Редакторы: *М.С. Ахметова, Д.С. Аленов*

Верстка на компьютере *Г.Д.Жадыранова*

Подписано в печать 14.06.2023.

Формат 70x90<sup>1/16</sup>. Бумага офсетная. Печать – ризограф.  
20,0 п.л. Тираж 300. Заказ 3.