

ISSN 2518-170X (Online)

ISSN 2224-5278 (Print)



«ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ
АКАДЕМИЯСЫ» РҚБ

«ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫ» РҚБ

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

РОО «НАЦИОНАЛЬНОЙ
АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН»

N E W S

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF
KAZAKHSTAN

SERIES

OF GEOLOGY AND TECHNICAL SCIENCES

4 (465)

JULY – AUGUST 2024

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы «ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы» ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАНПК сообщает, что научный журнал «Известия НАНПК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАНПК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редактор

ЖҰРЫНОВ Мұрат Жұрынұлы, химия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, «Қазақстан Республикасы Ұлттық ғылым академиясы» РҚБ-нің президенті, АҚ «Д.В. Сокольский атындағы отын, катализ және электрохимия институтының» бас директоры (Алматы, Қазақстан) **Н = 4**

Ғылыми хатшы

АБСАДЫКОВ Бахыт Нарикбайұлы, техника ғылымдарының докторы, профессор, ҚР ҰҒА жауапты хатшысы, А.Б. Бектұров атындағы химия ғылымдары институты (Алматы, Қазақстан) **Н = 5**

Редакциялық алқа:

ӘБСАМЕТОВ Мәліс Құдысұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, «У.М. Ахмедсафина атындағы гидрогеология және геоэкология институтының» директоры (Алматы, Қазақстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтайұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, Қ.И. Сатпаев атындағы геология ғылымдары институтының директоры (Алматы, Қазақстан) **Н = 2**

СНОУ Дэниел, Ph.D, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска штаты, АҚШ) **Н = 32**

ЗЕЛЬТМАН Реймар, Ph.D, табиғи тарих мұражайының Жер туралы ғылымдар бөлімінде петрология және пайдалы қазбалар кен орындары саласындағы зерттеулердің жетекшісі (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция) **Н = 15**

ШЕН Пин, Ph.D, Қытай геологиялық қоғамының тау геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастығының мүшесі (Пекин, Қытай) **Н = 25**

ФИШЕР Аксель, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, геология-минералогия ғылымдарының докторы, профессор, РҒА академигі, А.А. Трофимука атындағы мұнай-газ геологиясы және геофизика институты (Новосибирск, Ресей) **Н = 19**

АГАБЕКОВ Владимир Енокович, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жаңа материалдар химиясы институтының құрметті директоры (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 20**

СЕЙТМҰРАТОВА Элеонора Юсуповна, геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА корреспондент-мүшесі, Қ.И. Сатпаев атындағы Геология ғылымдары институты зертханасының меңгерушісі (Алматы, Қазақстан) **Н = 11**

САҒЫНТАЕВ Жанай, Ph.D, қауымдастырылған профессор, Назарбаев университеті (Нұр-Сұлтан, Қазақстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, Бикокк Милан университеті қауымдастырылған профессоры (Милан, Италия) **Н = 28**

«ҚР ҰҒА» РҚБ Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктеуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № **KZ39VPY00025420** мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Тақырыптық бағыты: *геология, мұнай және газды өңдеудің химиялық технологиялары, мұнай химиясы, металдарды алу және олардың қосындыларының технологиясы.*

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекен-жайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ, 2024

Главный редактор

ЖУРИНОВ Мурат Журинович, доктор химических наук, профессор, академик НАН РК, президент РОО «Национальной академии наук Республики Казахстан», генеральный директор АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского» (Алматы, Казахстан) **Н = 4**

Ученый секретарь

АБСАДЫКОВ Бахыт Нарикбаевич, доктор технических наук, профессор, ответственный секретарь НАН РК, Институт химических наук им. А.Б. Бектурова (Алматы, Казахстан) **Н = 5**

Редакционная коллегия:

АБСАМЕТОВ Малис Кудысович, (заместитель главного редактора), доктор геологоминералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геоэкологии им. У.М. Ахмедсафина (Алматы, Казахстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтаевич, (заместитель главного редактора), доктор геологоминералогических наук, профессор, директор Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=2**

СНОУ Дэниел, Ph.D, ассоциированный профессор, директор Лаборатории водных наук университета Небраски (штат Небраска, США) **Н = 32**

ЗЕЛЬТМАН Реймар, Ph.D, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, доктор технических наук, профессор Университета Нанси (Нанси, Франция) **Н=15**

ШЕН Пин, Ph.D, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай) **Н = 25**

ФИШЕР Аксель, ассоциированный профессор, Ph.D, технический университет Дрезден (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, доктор геолого-минералогических наук, профессор, академик РАН, Институт нефтегазовой геологии и геофизики им. А.А. Трофимука СО РАН (Новосибирск, Россия) **Н = 19**

АГАБЕКОВ Владимир Енокович, доктор химических наук, академик НАН Беларуси, почетный директор Института химии новых материалов (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, ассоциированный профессор, Технический университет (Дрезден, Берлин) **Н = 20**

СЕЙТМУРАТОВА Элеонора Юсуповна, доктор геолого-минералогических наук, профессор, член-корреспондент НАН РК, заведующая лабораторией Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=11**

САГИНТАЕВ Жанай, Ph.D, ассоциированный профессор, Назарбаев университет (Нурсултан, Казахстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия) **Н = 28**

«Известия РОО «НАН РК». Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № **KZ39VPY00025420**, выданное 29.07.2020 г.

Тематическая направленность: *геология, химические технологии переработки нефти и газа, нефтехимия, технологии извлечения металлов и их соединений.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, оф. 219, тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© РОО «Национальная академия наук Республики Казахстан», 2024

Editorial chief

ZHURINOV Murat Zhurinovich, doctor of chemistry, professor, academician of NAS RK, president of the National Academy of Sciences of the Republic of Kazakhstan, general director of JSC “Institute of fuel, catalysis and electrochemistry named after D.V. Sokolsky» (Almaty, Kazakhstan) **H = 4**

Scientific secretary

ABSADYKOV Bakhyt Narikbaevich, doctor of technical sciences, professor, executive secretary of NAS RK, Bekturov Institute of chemical sciences (Almaty, Kazakhstan) **H = 5**

Editorial board:

ABSAMETOV Malis Kudysovich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, academician of NAS RK, director of the Akhmedsafin Institute of hydrogeology and hydrophysics (Almaty, Kazakhstan) **H=2**

ZHOLTAEV Geroy Zholtaevich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, director of the institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=2**

SNOW Daniel, Ph.D, associate professor, director of the laboratory of water sciences, Nebraska University (Nebraska, USA) **H = 32**

ZELTMAN Reyman, Ph.D, head of research department in petrology and mineral deposits in the Earth sciences section of the museum of natural history (London, England) **H = 37**

PANFILOV Mikhail Borisovich, doctor of technical sciences, professor at the Nancy University (Nancy, France) **H=15**

SHEN Ping, Ph.D, deputy director of the Committee for Mining geology of the China geological Society, Fellow of the American association of economic geologists (Beijing, China) **H = 25**

FISCHER Axel, Ph.D, associate professor, Dresden University of technology (Dresden, Germany) **H = 6**

KONTOROVICH Aleksey Emilievich, doctor of geological and mineralogical sciences, professor, academician of RAS, Trofimuk Institute of petroleum geology and geophysics SB RAS (Novosibirsk, Russia) **H = 19**

AGABEKOV Vladimir Enokovich, doctor of chemistry, academician of NAS of Belarus, honorary director of the Institute of chemistry of new materials (Minsk, Belarus) **H = 13**

KATALIN Stephan, Ph.D, associate professor, Technical university (Dresden, Berlin) **H = 20**

SEITMURATOVA Eleonora Yusupovna, doctor of geological and mineralogical sciences, professor, corresponding member of NAS RK, head of the laboratory of the Institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=11**

SAGINTAYEV Zhanay, Ph.D, associate professor, Nazarbayev University (Nursultan, Kazakhstan) **H = 11**

FRATTINI Paolo, Ph.D, associate professor, university of Milano-Bicocca (Milan, Italy) **H = 28**

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA «National Academy of Sciences of the Republic of Kazakhstan» (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *geology, chemical technologies for oil and gas processing, petrochemistry, technologies for extracting metals and their connections.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, Almaty, 050010, tel. 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2024

NEWS of the National Academy of Sciences of the Republic of Kazakhstan
SERIES OF GEOLOGY AND TECHNICAL SCIENCES
ISSN 2224-5278
Volume 4. Number 466 (2024), 224–236
<https://doi.org/10.32014/2024.2518-170X.437>
UDC 622.24.051

© **B.T. Ratov**¹, **V.L. Khomenko**², **A.E. Kuttybayev**^{1*}, **K.S. Togizov**¹, **Z.G. Uteпов**³, 2024

¹Kazakh National Research Technical University named after K.I. Satbayev, Almaty, Kazakhstan;

²Dnipro University of Technology, Dnipro, Ukraine;

³Caspian State University of Technology and Engineering named after Sh. Yesenov, Aktau, Kazakhstan.

E-mail: a.kuttybayev@satbayev.university

INNOVATIVE DRILL BIT TO IMPROVE THE EFFICIENCY OF DRILLING OPERATIONS AT URANIUM DEPOSITS IN KAZAKHSTAN

Ratov Boranbay Tovbasarovich – Kazakh National Research Technical University named after K.I. Satbayev, Almaty, Kazakhstan, Doctor of Technical Sciences, Professor, Head of the Department of Geophysics and Seismology

E-mail: b.ratov@satbayev.university, <https://orcid.org/0000-0003-4707-3322>;

Khomenko Volodymyr Lvovyeh – Dnipro University of Technology, Dnipro, Ukraine, Candidate of Technical Sciences, Associate Professor of Oil and Gas Engineering and Drilling Department

E-mail: intelldriller@gmail.com, <https://orcid.org/0000-0002-3607-5106>;

Kuttybayev Aidar Ermekkalievich – Kazakh National Research Technical University named after K.I. Satbayev, Almaty, Kazakhstan, Candidate of Technical Sciences, Associate Professor of the Department of Mining

E-mail: a.kuttybayev@satbayev.university, <https://orcid.org/0000-0003-3997-8324>;

Togizov Kuanysh Serikhanovich – Kazakh National Research Technical University named after K.I. Satbayev, Almaty, Kazakhstan, Ph.D., Associate Professor, Professor of the Department of Geophysics and Seismology

E-mail: k.togizov@satbayev.university, <https://orcid.org/0000-0002-4830-405X>;

Uteпов Zamanbek Gabitovich – Caspian State University of Technology and Engineering named after Sh. Yesenov, Aktau, Kazakhstan, PhD student of the Department of Ecology and Geology

E-mail: otepzaman@gmail.com, <https://orcid.org/0009-0000-5086-7698>.

Abstract. The Republic of Kazakhstan is the world leader in proven uranium reserves. Most of the deposits are concentrated in the Shu-Sarysu uranium-ore geological province and are developed by underground borehole leaching. Therefore, drilling operations account for 60–70 % of the total cost of field development. A typical geological section from wells is represented by an upper unit of soft, soft rocks lying to a depth of 300–500 m and a lower unit of medium and hard rocks to a depth of 350–800 m. These units are separated by a layer of dense clays. Currently, the first geological unit of soft rocks is drilled with spud bits with carbide cutters, and the second with blade bits equipped with PDC cutters. The main disadvantage of this technology is the unproductive loss of time on tripping operations necessary to lift a spud bit with carbide cutters and replace it with a bladed PDC bit to continue drilling the well to the designed depth. The research was based on the idea of combining in one bit design the advantages of carbide and PDC bits, which have proven themselves well in the geological conditions under study. To solve the problems, a comprehensive research method was used. It included a review and synthesis of literature sources, patent research, analysis of geological conditions, as well as the scope, advantages and lim-

itations of existing designs of cutting drill bits. As a result of the work, a technical solution was proposed and patented that allows the most effective use of two types of cutters in a single design of a rock-cutting tool: cheap carbide cutters used in the upper part of the rock section, and more expensive PDC cutters with high productivity in the lower part of the rock section, represented by harder ones. The fullest use of cutter use is achieved when the edges of the carbide cutters rise below the edges of the PDC cutter blades, i.e. when the former are closer to the bottom of the well when drilling the upper interval of soft rocks, and the bit has a split ring pilot equipped with mixed cutters in its end part. Rock-cutting PDC cutters should be made from the new super-hard composite material $25C_{\text{diamond}}-70.5WC-4.5Co$ with the addition of 10% zirconium dioxide micropowder (ZrO_2). The developed innovative combined bit will be effective in the practice of drilling geotechnological wells in the conditions of the Shu-Sarysu uranium-ore geological province.

Keywords: well drilling, blade bit, combined bit, PDC cutter, in-situ leaching

Acknowledgements: The research is funded by the Science Committee of the Ministry of Science and Higher Education of the Republic of Kazakhstan (grant № AP14869271).

© Б.Т. Ратов¹, В.Л. Хоменко², А.Е. Құттыбаев^{1*}, К.С. Тогизов¹, З.Г. Өтепов³, 2024

¹ «Қ.И. Сәтбаев атындағы Қазақ ұлттық техникалық зерттеу университеті» ЕҚК, Алматы, Қазақстан;

² «Днепр политехникасы «Ұлттық техникалық университет, Днепр, Украина;

³ Ш. Есенов атындағы Каспий мемлекеттік технологиялар және инжиниринг университеті, Ақтау, Қазақстан.

E-mail: a.kuttybayev@satbayev.university

ҚАЗАҚСТАННЫҢ УРАН КЕН ОРЫНДАРЫНДА БҰРҒЫЛАУ ЖҰМЫСТАРЫНЫҢ ТИІМДІЛІГІН АРТТЫРУҒА АРНАЛҒАН ИННОВАЦИЯЛЫҚ ҚАШАУ

Аннотация. Қазақстан Республикасы уранның дәлелденген қоры бойынша әлемде көшбасшы болып табылады. Кен орындарының басым бөлігі Шу-Сарысу уран-кенді геологиялық провинциясында шоғырланған және жерасты ұңғымаларын шаймалау арқылы игерілген. Сондықтан бұрғылау жұмыстары кен орнын игерудің жалпы құнының 60–70 % құрайды. Ұңғымадан алынған типтік геологиялық қима 300–500 м тереңдікте жатқан тасты, жартылай тасты таужыныстарының жоғарғы бірлігімен және 350–800 м тереңдіктегі орташа және қатты таужыныстардың төменгі бірлігімен ұсынылған тығыз саздар қабаты. Қазіргі уақытта жұмсақ таужыныстардың бірінші геологиялық қондырғысы карбидті ұштары бар пикобұрғылармен, ал екіншісі PDC кескіштермен жабдықталған қалақ қашауларымен бұрғыланады. Бұл технологияның негізгі кемшілігі - ұңғыманы жобаланған тереңдікке дейін бұрғылауды жалғастыру үшін карбидті кескіштері бар пикобұрғыны жоғарыға көтеру және оны қалақшалы PDC қашаумен ауыстыру үшін қажет операцияларындағы уақыттың өнімсіз жоғалуы. Зерттеу қаттықорытпалы мен PDC қашаулардың артықшылықтарын бір құрылымда біріктіру идеясына негізделген, ол зерттелетін геологиялық жағдайларда жақсы жұмыс істеді. Қойылған міндеттерді шешу үшін зерттеудің кешенді әдісі қолданылды. Оған әдеби дереккөздерге шолу және жалпылау, патенттік зерттеулер жүргізу,

геологиялық жағдайларды талдау және қолданыстағы бұрғылау қондырғыларының конструкцияларының қолданылуы, артықшылықтары мен шектеулері кірді. Жұмысты орындау нәтижесінде таужыныстарын бұзатын құралдың бірыңғай дизайнында кескіштердің екі түрін тиімді пайдалануға мүмкіндік беретін техникалық шешім ұсынылды және патенттелді: кесудің жоғарғы жағында қолданылатын арзан карбидті кескіштер және қатты таужыныстармен ұсынылған кесудің төменгі бөлігінде жоғары өнімділікке ие қымбат PDC кескіштері. Аталған құралдардың ресурсын ең толық пайдалану карбидті кескіштердің жиектері PDC кескішті жиектерінің астында көтерілгенде, яғни біріншісі жұмсақ таужыныстардың жоғарғы аралығын бұрғылау кезінде ұңғыманың кенжарына жақын болғанда және құралда оның соңғы бөлігінде аралас кескіштермен жабдықталған ажыратылатын сақина ұшқышы болған кезде пайда болады. Таужыныстарын бұзатын PDC кескіштерін жаңа 25 қатты композициялық материалдан жасау керек алмаз-70,5 4,5 Co, 10 % цирконий микроұнтағы (ZrO_2) қосылған. Әзірленген инновациялық аралас қашау Шу-Сарысу уран-кен геологиялық провинциясы жағдайында геотехнологиялық ұғымаларды бұрғылау тәжірибесінде тиімді болады.

Түйін сөздер: ұңғымаларды бұрғылау, қалақша қашау, аралас қашау, PDC кескіш, жерасты ұңғымаларын шаймалау

Алғыс: зерттеуді Қазақстан Республикасы Ғылым және жоғары білім министрлігінің Ғылым комитеті (грант №AP14869271) қаржыландырады.

© Б.Т. Ратов¹, В.Л. Хоменко², А.Е. Куттыбаев^{1*}, К.С. Тогизов¹, З.Г. Утепов³, 2024

¹НАО «Казакский национальный исследовательский технический университет им.

К.И. Сатпаева», Алматы, Казахстан;

²Национальный технический университет «Днепровская политехника», Днепр, Украина;

³Каспийский государственный университет технологий и инжиниринга им.

Ш. Есенова, Актау, Казахстан.

E-mail: a.kuttybayev@satbayev.university

ИННОВАЦИОННОЕ ДОЛОТО ДЛЯ ПОВЫШЕНИЯ ЭФФЕКТИВНОСТИ БУРОВЫХ РАБОТ НА УРАНОВЫХ МЕСТОРОЖДЕНИЯХ КАЗАХСТАНА

Аннотация. Республика Казахстан является мировым лидером по разведанным запасам урана. Большинство месторождений сосредоточено в Шу-Сарысуской ураново-рудной геологической провинции и разрабатываются методом подземного скважинного выщелачивания. Поэтому буровые работы составляют 60–70 % от общей стоимости разработки месторождений. Типичный геологический разрез по скважинам представлен верхней пачкой мягких пород, залегающей до глубины 300–500 м и нижней пачкой средних и твердых пород – до глубины 350–800 м. Эти пачки разделены слоем плотных глин. В настоящее время первая геологическая пачка мягких пород бурится пикобурами с твердосплавным вооружением, а вторая – лопастными долотами, оснащенными резцами PDC. Основным недостатком такой технологии – непроизводительные потери времени на спускоподъемные операции, необходимые для подъема пикобура с твердосплавными резцами и

замену его на лопастное PDC долото для продолжения бурения скважины до запроектированной глубины. Исследования базировались на идее соединения в одной конструкции долота достоинств твердосплавных и PDC-долот, которые хорошо себя зарекомендовали в исследуемых геологических условиях. Для решения поставленных задач был использован комплексный метод исследований. Он включал обзор и обобщение литературных источников, проведение патентных исследований, анализ геологических условий, а также области применения, преимуществ и ограничений существующих конструкций режущих буровых долот. В результате выполнения работы предложено и запатентовано техническое решение, позволяющее наиболее эффективно использовать в единой конструкции породоразрушающего инструмента два типа резцов: дешевые твердосплавные резцы, применяемые в верхней части разреза, и более дорогие резцы PDC, обладающие высокой производительностью в нижней части разреза, представленного более твердыми породами. Наиболее полное использование ресурса вооружения наступает, когда кромки твердосплавных резцов возвышаются под кромками лезвий резцов PDC, т.е. когда первые находятся ближе к забою скважины при бурении верхнего интервала мягких пород, а инструмент имеет разъемный кольцевой пилот, оснащенный смешанными резцами в его торцевой части. Породоразрушающие PDC резцы следует выполнять из нового сверхтвердого композиционного материала $25C_{\text{алмаз}}-70,5WC-4,5Co$ с добавкой 10 % микропорошка диоксида циркония (ZrO_2). Разработанное инновационное комбинированное долото будет эффективно в практике бурения геотехнологических скважин в условиях Шу-Сарыуской ураново-рудной геологической провинции.

Ключевые слова: бурение скважин, лопастное долото, комбинированное долото, резец PDC, подземное скважинное выщелачивание

Благодарности: исследование финансируется Комитетом науки Министерства науки и высшего образования Республики Казахстан (грант № AP14869271).

Introduction

The Shu-Sarysu uranium-ore geological province, located in Southern Kazakhstan, was discovered in the late 1960s and is recognized as the largest uranium ore reserve in the world.

This province includes two metallogenic zones: Kentse-Budennovskaya, where uranium mineralization is found in Upper Cretaceous deposits, and Uvanas-Kanzhuganskaya, with mineralization in Paleogene deposits. The total uranium resources in these zones are estimated at 1 million tons (Xayitov, 2022: 7).

Currently, 14 out of 56 explored deposits with balance uranium reserves are being developed in Kazakhstan, with the remaining 42 on reserve. Due to this province's discovery, Kazakhstan now holds 67 % of the world's proven uranium reserves, making it the global leader in this sector (Xayitov, 2022: 7). Most uranium deposits, such as Budennovskoye, Kanzhugan, Inkai, Zhalpak, and Uvanov, are developed through underground borehole leaching.

This method necessitates extensive drilling of technological, exploration, and auxiliary wells, making drilling operations a major expenditure, accounting for about 60-70% of the total development cost of uranium deposits (Khaitov, 2022: 12). The productive formations in most deposits of the Shu-Sarysu province typically range from 500 m to 650–800 m in depth. The geological sections of the wells generally feature an upper unit of soft, easily drillable rocks (sands, clay fractions) extending to depths of 300–500 m, and a lower unit of

more difficult-to-drill rocks (dense clays, gypsum, anhydrites, sandstones, siltstones) reaching depths of 350–800 m, separated by a layer of dense clays (Nazirova, 2019). Drilling the upper rock unit, averaging 540 m thick, takes about 70–80 hours, whereas drilling the lower unit (540–680 m) with bits equipped with polycrystalline diamond cutters (PDC) takes approximately 40–50 hours (Togasheva, 2023).

Currently, due to economic considerations, a mixed drilling technology is employed at the sites:

- The first geological unit (0 to 300–500 m) of soft rocks is drilled using spud bits with carbide drills.

- The second geological unit, ranging from 350–500 m to 700–800 m (to the design depth) of medium and hard rocks, is drilled with blade bits equipped with PDC cutters (Khaitov, 2022: 12).

This mixed technology maximizes the capabilities of spud bits with carbide cutters for efficiently drilling soft rocks, while significantly enhancing productivity and bit life in harder rocks with the use of blade PDC bits, despite their higher cost. However, the primary drawback of this method is the unproductive time lost during tripping operations needed to switch from a spud bit with carbide cutters to a blade PDC bit to continue drilling to the designed depth.

The purpose of this work is to develop a bit design capable of efficiently drilling through the entire geological section characteristic of the Shu-Sarysu uranium-ore geological province in Kazakhstan.

To achieve this purpose, the following tasks were undertaken:

- Conducting a detailed study of the geological features of the Shu-Sarysu uranium-ore geological province, including rock types, mineral composition, and strata structure.

- Identifying specific problems associated with drilling in this region.

- Reviewing existing literature on drill bit technologies and their effectiveness in similar geological conditions.

- Performing patent research to examine innovations and patented technologies in drill bit design.

- Identifying and selecting materials for bit reinforcement that would be effective in the specific conditions of the Shu-Sarysu uranium-ore geological province.

Materials and basic methods

The research was based on the idea of combining in one bit design the advantages of carbide and PDC bits, which have proven themselves well in the geological conditions under study.

To solve the problems, a comprehensive research method was used. It included a review and synthesis of literature sources, patent research and analysis of the scope, advantages and limitations of existing designs of cutting drill bits.

The creation of a combined drill bit for drilling technological wells in Kazakhstan began with an in-depth design stage. This phase included a thorough analysis of the geological characteristics of the drilling sites, including rock types, formations and specific drilling problems. Based on these ideas, a conceptual design was developed that combines PDC and carbide cutters into a single bit design.

Once the conceptual design was completed, the manufacturing process began. High quality materials were used, selected for their suitability to different geological conditions. The manufacturing process included precision machining and assembly techniques to en-

sure smooth integration of the PDC and carbide cutters onto the bit blade. The location and orientation of the cutters have been carefully optimized to improve cutting efficiency and overall drilling performance.

A series of laboratory tests will be conducted to evaluate the newly developed combination drill bit. These tests will replicate drilling conditions typical of geological formations in Kazakhstan. Test reports will measure rate of penetration, cutting efficiency and wear resistance of PDC and carbide cutters under various drilling parameters.

Results

For initial attempts at drilling technological wells with a single rock-cutting tool in the Shu-Sarysu uranium-ore geological province, two-, three-, or four-bladed hydraulic monitor spud bits designed by JSC Volkovgeology were used, with the four-blade bit being the most common (Abdoldina, 2020: 5). These bits feature stepped blades and a central pyramidal section equipped with carbide cutters. The bit body includes channels between the blades, each 140 mm in diameter, to supply drilling fluid to the bottom.

Long-term use of this spud bit demonstrated high productivity when drilling the upper geological section. However, upon encountering dense clays, there is a sharp decline in the rate of penetration (ROP), significant cutter wear, and the necessity to lift the spud bit to the surface for replacement (Abdoldina, 2021: 9).

Efforts have been made to reduce wear on the central pyramidal part of the bit. In 2017, tests of a spud bit (three samples) produced by the Republic of Uzbekistan were conducted at the Budenovskoye and Khorosan fields (Piriverdiyev, 2019: 9).

The spud bit features three blades reinforced with carbide cutters. Unlike the peak-shaped spud bit from JSC Volkovgeology, this bit ends with a flat top part equipped with three cylindrical teeth cutters. The bit has a popular diameter of 161 mm, with three channels each measuring 9 mm in diameter.

Testing of the spud bit was primarily conducted on the upper member of soft rocks (0–370 m), consisting of sands, clays, sandy sediment layers, pebbles, and loams, categorized under drillability I-IV. The penetration per bit ranged from 330–350 m. However, when drilling the 370–450 m interval (clay deposits), penetration sharply decreased to 80–100 m, and the rate of penetration (ROP) dropped by 30 % compared to the JSC Volkovgeology spud bit, becoming ineffective in dense clays (Biletsky, 2019: 7).

Tests highlighted the following disadvantages of the spud bit from Uzbekistan:

– The ROP through clay deposits was on average 30 % lower than with the JSC Volkovgeology spud bit.

– The 9 mm diameter channels were insufficient, leading to clogging with rock and clay during drilling.

– Increased weight on the spud bit resulted in drill string vibration, jamming, and intense wear of the calibrating cutters (Borash, 2023: 7).

Kazakh National Research Technical University named after K.I. Satbayev has conducted extensive research and development to enhance the efficiency of drilling operations for technological wells. These studies focused on the forces affecting the cutters placed on the spud bit blades at varying distances from the axis of rotation (Biletsky, 2019: 7). The research revealed that near-axial regions of rotation experience zero speeds, causing the weight on the bit (WOB) to increase sharply (8–10 times or more). This leads to a halt in the bit's rotation and slow rock destruction, complicating the drilling process, accelerating wear on the bit's central part, and reducing overall productivity even in the upper section interval.

To address these issues and improve drilling efficiency under such conditions, a technical solution was proposed. This solution was implemented in a simple design of a patented spud bit in the Republic of Kazakhstan (Biletsky, 2019: 7). The design features stepped blades with cutters uniformly welded to a tubular body that has external threads for connection to the drill string. Additionally, to increase structural rigidity, the lowest cantilevered steps are welded to a ring equipped with carbide cutters.

The operating principle of this spud bit involves creating an annular cut with cutters soldered to the steps. The resulting core is either washed away by the central flow of drilling fluid passing through the annular body or destroyed by the cutters of the stiffening ring and bit vibration when encountering harder rocks. This design significantly reduces the weight on the blades, prevents spud bit sticking, and increases wear resistance. Production tests of the PK-2 spud bit at the Budenovskoye field demonstrated its superior efficiency compared to previously used blade bits with carbide cutters (Ratov, 2020: 6). In the upper section, the rate of penetration (ROP) ranged from 18–20 m/hour to 10–12 m/hour, gradually decreasing to 3 m/hour and even zero when drilling dense clays. The decrease was due to the bending of the lower stages of the blades forming an annular cut as the weight on bit (WOB) was increased. Overall, the PK-2 spud bit covered an interval of 0–436 m, setting a record for carbide blade bits used.

Analysis of the spud bits' industrial use indicated their ineffectiveness in drilling the harder rocks of the lower section, with productivity dropping to an average of 2–3 m/h and wear resistance declining to 50–80 m of penetration (Ratov, 2020: 6).

The introduction of blade bits equipped with PDC cutters presents a significant opportunity to increase drilling productivity in the harder rocks of the lower geological section, potentially replacing previously used carbide-tipped bits. Despite the higher cost of PDC bits, their use is justified by a considerable reduction in the construction time of geotechnological wells.

As a result of synthesizing scientific, technical, and patent literature, and critically analyzing the use of various rock-cutting tools in the Shu-Sarysu uranium-ore geological province, the following requirements for drill bits for in-situ leaching wells were established:

- Combine the advantages of carbide cutters (low cost) and PDC cutters (high destructive ability and wear resistance), with each type being effectively used depending on the rock properties.
- Ensure calibrating elements can maintain the well diameter to the designed depth (700–800 m).
- Maintain the optimal ratio of technological parameters (ROP, WOB, rpm).

A technical solution meeting these requirements for drilling technological wells in the Shu-Sarysu uranium-ore geological province was developed and patented in the Republic of Kazakhstan (Ratov, 2023: 15). Figure 1 illustrates a general view of the proposed combined bit.

The annular housing 1 features an upper thread 2 for connection to the drill string and a lower thread 3 for connection to the annular blade pilot 4. Stepped blades 5 are welded to the side surface of housing 1, with the steps alternately armed with carbide cutters 6 and PDC cutters 7. Blades 8 are also welded to the side surface of pilot 4, continuing the blades 5 of the housing and decreasing in transverse size with each step.

The pilot body includes inclined channels 9 for the passage of drilling fluid and has

four carbide cutters and an equal number of PDC cutters at its end. In the upper interval of the geological section, which consists of soft rocks, drilling is performed with carbide cutters. Consequently, their edges should be positioned closer to the bottom of the well at a distance h relative to the edges of the PDC cutters (Fig. 2).

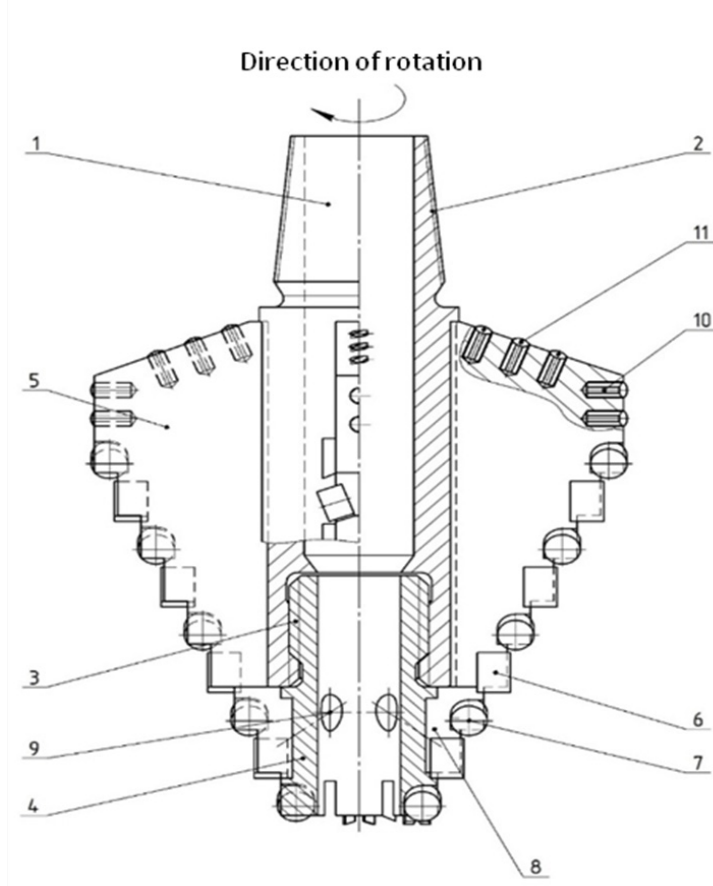


Fig. 1. Combined spud bit (according to RK patent No. 35606)

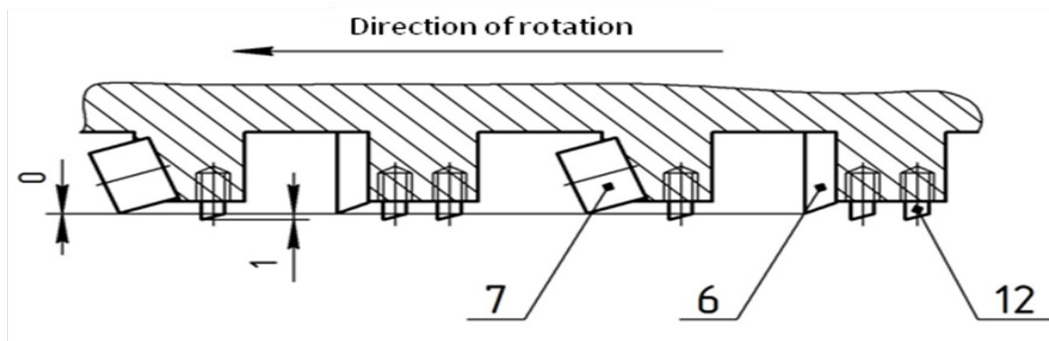


Fig. 2. Development along the middle circle of the end of the annular pilot

7 – PDC cutter; 6 – main carbide cutter; 12 – auxiliary carbide cutters

To address complications during drilling, such as rock falls onto the bit, the rear part of the blades is equipped with emergency carbide bits 11. Additionally, carbide cutters 12 are used to enhance the formation of the annular bottom.

A key aspect of the combined spud bit drilling technology is that at the start of the soft rock drilling interval (Fig. 3, A), the transverse size of the carbide cutter’s blunting area is equal to b_i (initial, factory blunting). As drilling progresses, even in soft rocks (Fig. 3, B), the cutter blunting size increases due to abrasive wear, reaching b_f when encountering harder rocks (Fig. 3, B).

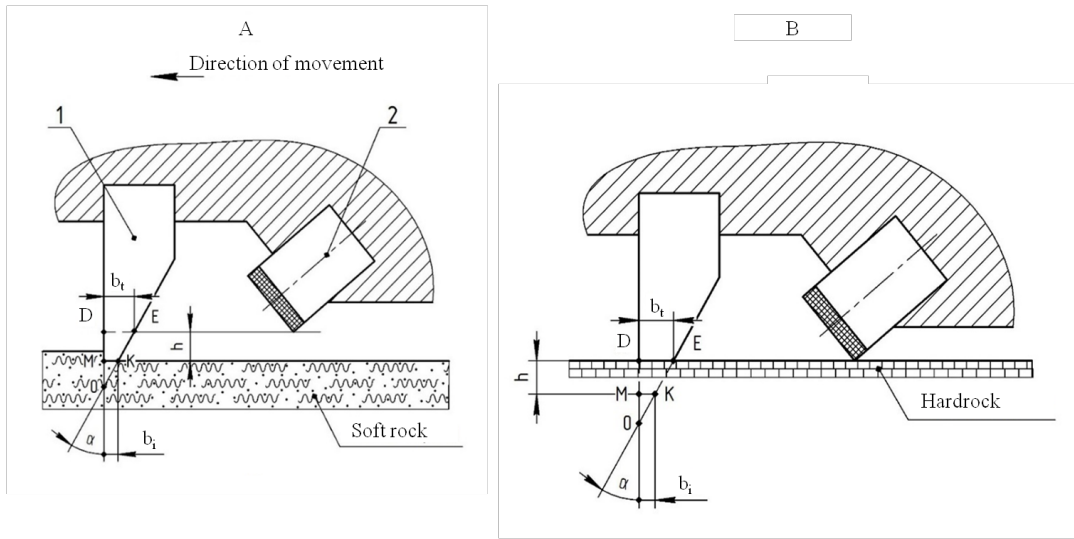


Fig. 3. Determination of the amount of wear of a carbide cutter

1 – carbide cutter; 2 – PDC cutter; b_i – initial blunting of the incisor; b_f – final blunting of the cutter when encountering a formation with increased drilling difficulty

From triangles ODE and OMK (Fig. 4, A) we can determine the height h ($h = MD$), which is equal to:

$$h = \frac{b_f - b_i}{tg\alpha} \tag{1}$$

where α is the sharpening angle of the carbide cutter.

The size h represents the initial offset between the edges of the carbide cutters and the edges of the PDC cutter blades at the end of the spud bit prior to well drilling.

The value of h is influenced by several factors: the rate of carbide cutter wear during drilling in the upper section, the thickness of rocks requiring drilling with carbide cutters, and the reduction in ROP when transitioning from carbide-tipped spud bits to PDC cutters. For specific uranium deposits like Budenovskoye, Inkai, etc., h is determined experimentally with precision by repeatedly measuring the initial b_i and resulting b_f values after using a

spud bit.

Once wear causes the edges of the carbide cutters and PDC cutter blades to align, the PDC cutters begin exerting significant force on the bottom, enabling the well to deepen to its designed depth due to the functioning of these components.

The blade pilot 4 is designed to be detachable from the bit body. This is crucial because rock-cutting elements closer to the rotation axis endure higher loads and wear out more rapidly compared to the stepped blades on the body (Dreus, 2016a, 2016b). Consequently, the bit often needs removal from operation due to central cutter wear, even though the remaining cutters are still functional. The proposed technical solution allows for replacing the worn pilot in case of abnormal cutter wear in the central part, promoting uniform wear across all cutters – both on the blades and the pilot. This approach ensures thorough utilization of the spud bit’s expensive equipment and enhances its technical and economic performance metrics.

Maintaining the nominal diameter during well drilling is crucial for ensuring the efficiency and success of drilling operations. The planned borehole diameter is essential for the accurate placement and functioning of drilling equipment and pipes. Deviations from the intended diameter can lead to complications during tripping, casing installation, in-situ leaching equipment setup, or reservoir stimulation (Abdeli, 2023: 7). Such deviations prolong the duration and increase the cost of well construction and equipment installation.

Furthermore, a narrowed wellbore increases mechanical resistance and friction during tripping, accelerating wear on drilling equipment and raising the risk of damage. Unevenness and narrowing of the wellbore also heighten the chances of emergencies, such as drill string jamming or well wall collapses, necessitating costly and intricate operations for resolution (Ihnatov, 2021b; Abirov et al., 2022: 159–173; Abakumov et al., 2014: 209–218).

To address these challenges, wear-resistant calibrating elements 10 with diameter d are installed on the stepped blades at their maximum transverse size, protruding from the blades by amount b . This arrangement ensures the well diameter is maintained consistently throughout its entire depth (Fig. 4).

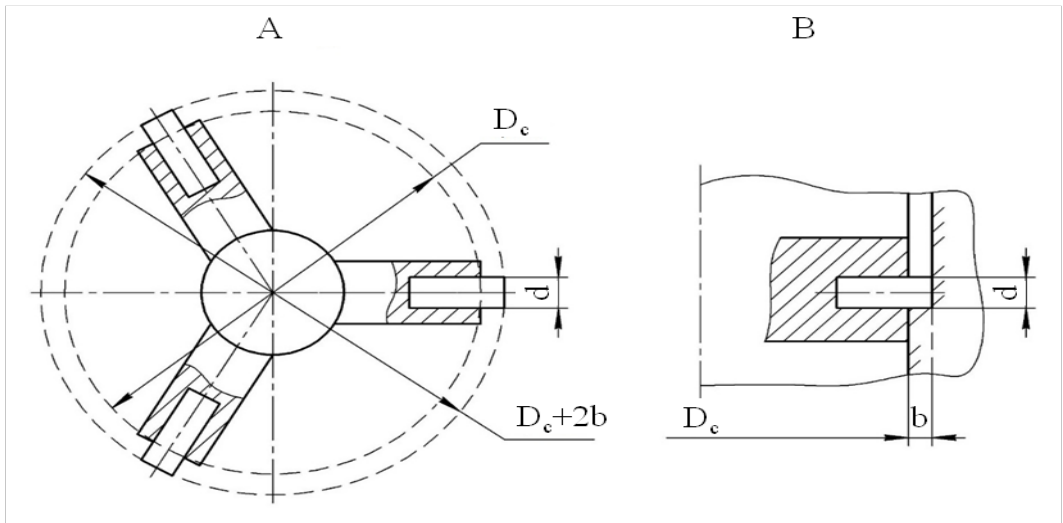


Fig. 4. Reinforcement of the calibrating part of the bit

D_c is the diameter of the circle described by the body blades, excluding the release of calibrating elements; d – diameter of calibrating cutters; b – protrusion of calibrating cutters from the blades

To assess the force interactions of the spud bit's working elements with the well bottom and walls, understanding the strength characteristics of the rocks being drilled and the technical capabilities of drilling rigs is essential (Ihnatov, 2021a: 8; Ratov, 2022; Kuanbayeva et al., 2024: 1640–1647).

The development of PDC cutter materials involved collaboration with the Bakul Institute of Superhard Materials of the National Academy of Sciences of Ukraine (Ratov, 2023: 15). Research has demonstrated that incorporating zirconium dioxide micropowder (ZrO_2) into the $25C_{\text{diamond}}-70.5WC-4.5Co$ composite, produced via spark plasma sintering, significantly enhances the material's mechanical and operational properties.

The addition of ZrO_2 micropowder into the $25C_{\text{diamond}}-70.5WC-4.5Co$ composite results in a structure with finer carbide matrix grains and denser diamond-matrix interfaces. This improves the material's resistance to elastic and plastic deformations and enhances its resistance to abrasive wear simultaneously.

Incorporating zirconium dioxide micropowder ($ZrO_2 = 10\%$) into the $25C_{\text{diamond}}-70.5WC-4.5Co$ composite increases the calculated resistance values to elastic deformation from 0.043 to 0.057 GPa, resistance to plastic deformation from 0.056 to 0.075 GPa, and abrasive wear resistance from $0.75 \cdot 10^{-7}$ to $2.75 \cdot 10^{-7}$ GPa³.

This newly developed composite material will be employed to manufacture rock-cutting elements that promise exceptional effectiveness in the challenging conditions of the Shu-Sarysu uranium ore geological province.

Discussion

Combination bits, featuring both PDC (polycrystalline diamond compact) and carbide cutters, excel across a broader spectrum of formations. While carbide cutters perform exceptionally in softer formations, PDC cutters are optimized for harder formations. This dual capability allows for uninterrupted drilling through varying geological conditions, reducing the need for frequent bit changes.

The synergy of PDC and carbide cutters in combination bits results in higher ROP and increased efficiency. PDC cutters offer superior cutting in hard formations, whereas carbide cutters facilitate smoother drilling in softer formations. This integration improves overall drilling performance and decreases drilling time.

Incorporating carbide cutters into combination bits helps balance the cutting workload, reducing wear and extending the bit's life. Carbide cutters are more resistant to impact and abrasion than PDC cutters, making the bits more durable and better suited for challenging drilling conditions.

Although PDC cutters are highly effective, they are also more expensive. Combination bits present a cost-effective solution by utilizing carbide cutters in softer formations, where the benefits of PDC cutters are not as critical. This approach optimizes drilling costs while maintaining high performance across different rock types.

Drilling operations can face stalling or slowdowns when encountering sudden changes in formation hardness, especially with bits equipped only with PDC cutters. Combination bits mitigate this risk by incorporating carbide cutters, which handle softer formations more effectively, ensuring continuous drilling and improved efficiency.

Combination bits with both PDC and carbide cutters provide significant advantages over bits with only PDC cutters, including versatility, enhanced performance, improved durability, cost-effectiveness, and reduced stalling risk. These benefits make combination bits an ideal choice for drilling operations across diverse geological formations and conditions.

Conclusion

1. A patented technical innovation enables optimal utilization of two types of cutters within a single rock-cutting bit design: economical carbide cutters are employed in the upper section of uranium deposits composed of soft, easily drillable rocks, while more expensive PDC cutters with superior productivity are utilized in the lower sections containing harder rocks.

2. Optimal utilization of the bit's capabilities is achieved when the edges of the carbide cutters are positioned slightly below those of the PDC cutter blades. This configuration ensures the carbide cutters operate closer to the well bottom during drilling of the upper interval of soft rocks. The bit includes a split ring pilot equipped with a combination of these cutters at its end.

3. The rock-cutting PDC cutters are fabricated from a novel super-hard composite material, $25C_{\text{diamond}}-70.5WC-4.5Co$, enhanced with zirconium dioxide micropowder ($ZrO_2 = 10\%$). This material was developed through collaboration with the V. Bakul Institute for Superhard Materials and is tailored to withstand the demanding conditions encountered in drilling operations.

REFERENCES

Abirov D., Ybyraimzhanov K., Turkmenbayev A., Abdykerimova E. & Kuanbayeva B. (2022). Innovative Features of Education in Kazakhstan's Lyceum-Gymnasium. *Cypriot Journal of Educational Sciences*. — 17(1). — 159–173.

Abakumov A., Ismailova A., Adamov A. (2014). Modeling of microbial communities of plant organisms in aquatic ecosystem. // International Information Institute (Tokyo), Information (Japan). — Volume 17. — I 1. 2014. — Pp. 209–218.

Abdeli D.Z., Bae W., Taubayev B.R., Yskak A.S. & Yesimkhanova A.K. (2023). Reducing the formation of asphaltene deposits and increasing the flow rates of oil wells. — *Naukovyi Visnyk Natsionalnoho Hirnychoho Universytetu*. — 5. — 41–47. <https://doi.org/10.33271/nvngu/2023-5/041>

Abdoldina F.N., Nazirova A.N., Dubovenko Y.I. & Umirova G.K. (2020). On the solution of the gravity direct problem for a prism with a simulated annealing approach. *Geomodel 2020*. — Sep 2020, 2020. — 1–5. <https://doi.org/10.3997/2214-4609.202050014>

Abdoldina F.N., Nazirova A.N., Dubovenko Y.I. & Umirova G.K. (2021). Solution of the gravity exploration direct problem by the simulated annealing method for data interpretation of gravity monitoring of the subsoil conditions. — *NEWS of the National Academy of Sciences of the Republic of Kazakhstan. Series of Geology and Technical Sciences*. — 445(1). — 13–21. <https://doi.org/10.32014/2021.2518-170x.2>

Biletsky M.T., Kozhevnykov A.A., Ratov B.T. & Khomenko V.L. (2019). Dependence of the drilling speed on the frictional forces on the cutters of the rock-cutting tool. *Naukovyi Visnyk Natsionalnoho Hirnychoho Universytetu*, —1, — 21–27. <https://doi.org/10.29202/nvngu/2019-1/22>

Borash A.R., Nurshakhanova L.K., Arshidinova M.T., Kenzhegaliyeva ZH.M., Zhanggirkhanova A.A. (2023). Improving the efficiency of PDC bits in oil and gas drilling. — *International Multidisciplinary Scientific GeoConference SGEM*. <https://doi.org/10.5593/sgem2023/1.1/s06.84>

Can Cai & Zhang P. & Sun M.-G & Yang Y.-X & Xie S. & Pu Z.-C & Yang X.-P & Gao C. & Tan Z.-B. (2021). Mechanism of rock breaking under combining of separated impact and cutting in oil and gas drilling. *Yantu Lixue/Rock and Soil Mechanics*. — 42. — 2535–2544. <http://dx.doi.org/10.16285/j.rsm.2021.0066>.

Dreus A.Yu., Sudakov A.K., Kozhevnikov A.A. & Vakhalin Yu.N. (2016, a). Study on thermal strength reduction of rock formation in the diamond core drilling process using pulse flushing mode. — *Naukovyi Visnyk Natsionalnoho Hirnychoho Universytetu*, — 3, — 5–10.

Dreus A., Kozhevnikov A., Lysenko K. & Sudakov A. (2016, b). Investigation of heating of the drilling bits and definition of the energy efficient drilling modes. *Eastern-European Journal of Enterprise Technologies*. — 3(7(81)). — 41. <https://doi.org/10.15587/1729-4061.2016.71995>

Ihnatov A.O., Koroviaka Ye.A., Pinka J., Rastsvietaiev V.O. & Dmytruk O.O. (2021, a). Geological and mining-engineering peculiarities of implementation of hydromechanical drilling principles. *Naukovyi Visnyk Natsionalnoho Hirnychoho Universytetu*. — 1. — 11–18. <https://doi.org/10.33271/nvngu/2021-1/011>

- Ihnatov A., Koroviaka Y., Rastsvietaiev V. & Tokar L. (2021, b). Development of the rational bottomhole assemblies of the directed well drilling. *E3S Web of Conferences*. —230. — 01016. <https://doi.org/10.1051/e3sconf/202123001016>
- Kuanbayeva Bayan, Imashev Gizatulla, Mailybayeva Aiman, Mukhanbetzhanova Akmaral, Koshchanova Gulash (2024). The effectiveness of using interactive computer models when teaching physics in modern school. *Scientific Herald of Uzhhorod University. Series Physics*. — V. 55. — Pp. 1640–1647. — ISSN 24158038. <https://doi.org/10.54919/physics/55.2024.164vu0>
- Khaitov O.G., Umirzokov A.A., Yusupkhojaeva E.N., Abdurakhmonova S.P. & Kholmatova N.G. (2022). Assessment of the density of the well grid in the southeastern part of the Bukhara-khiva region. — *NEWS of the National Academy of Sciences of the Republic of Kazakhstan, Series of Geology and Technical Sciences*. — 3(453). — 253–264. <https://doi.org/10.32014/2022.2518-170x.194>
- Nazirova A., Abdoldina F., Dubovenko Y. & Umirova G. (2019). Development of GIS subsystems for gravity monitoring data analysis of the subsoil conditions for oil and gas fields. *18th International Conference on Geoinformatics – Theoretical and Applied Aspects*. <https://doi.org/10.3997/2214-4609.201902099>
- Piriverdiyev I., Sarbopeyeva M. & Asadova G. (2019). Analysis of modeling and decision-making processes for drilling wells under uncertainty. — *NEWS of National Academy of Sciences of the Republic of Kazakhstan*. — 1(433). — 23–31. <https://doi.org/10.32014/2019.2518-170x.2>
- Ratov B.T., Fedorov B.V., Khomenko V.L., Baiboz A.R., Korgasbekov D.R. (2020). Some features of drilling technology with PDC bits. *Naukovyi Visnyk Natsionalnoho Hirnychoho Universytetu*, — 3. — 13–18. <https://doi.org/10.33271/nvngu/2020-3/013>
- Ratov B.T., Mechnik V.A., Rucki M., Gevorkyan E.S., Bondarenko N.A., Kolodnitskyi V.M., Chishkala V.A., Kudaikulova G.A., Muzaparova A.B. & Korostyshevskiy D.L. (2023). C_{diamond}-(WC-Co)-ZrO₂ composite materials with improved mechanical and adhesive properties. — *Journal of Superhard Materials*. — 45(2). — 103–117. <https://doi.org/10.3103/s1063457623020107>
- Ratov B., Fedorov B., Isonkin A., Ibyldaev M. & Borash B. (2022). Increasing the efficiency of drilling bit use in hard rocks by high-quality performance of a diamond-carrying matrix. — *International Multidisciplinary Scientific GeoConference SGEM*. <https://doi.org/10.5593/sgem2022/1.1/s03.036>
- Shao F., Ji G., Wu Q. & Zhang J. (2024). Research on the effect of combined cutters of PDC bit on cutting efficiency. — *Springer Series in Geomechanics and Geoengineering*. — 860–869. https://doi.org/10.1007/978-981-97-0256-5_73
- Sun M., Zhang H. & Suo Z. (2022). Application research on impact tool combining PDC bit. *Advances in Transdisciplinary Engineering*. <https://doi.org/10.3233/atde220454>
- Togasheva A.R., Bayamirova R.Y., Zholbassarova A.T., Sarbopeeva M.D., Arshidinova M.T. (2023). Pilot field tests of shock-wave treatment of wells at the fields of JSC “Ozenmunaigas.” — *International Multidisciplinary Scientific GeoConference SGEM*. <https://doi.org/10.5593/sgem2023/1.1/s06.86>
- Xayitov O.G., Zokirov R.T., Agzamov O.O., Gafurov Sh.O. & Umirzoqov A.A. (2022). Classification of hydrocarbon deposits in the south-eastern part of the Bukhara-khiva region, justification of its methodology and analysis of the results. — *News of the National Academy of Sciences of the Republic of Kazakhstan. Series of Geology and Technical Sciences*. — 1(451). — 46–52. <https://doi.org/10.32014/2022.2518-170x.139>

CONTENT

A.E. Abetov, A.A. Auyesbek GEOLOGICAL-GEOPHYSICAL CRITERIA OF THE JEZKAZGAN ORE DISTRICT IN CENTRAL KAZAKHSTAN.....	6
K. Akishev, K. Aryngazin, A. Tleulessov, L. Bulyga, V. Stanevich THE USE OF SIMULATION MODELING IN CALCULATING THE PRODUCTIVITY OF THE TECHNOLOGICAL SYSTEM FOR THE PRODUCTION OF BUILDING PRODUCTS WITH FILLERS FROM MAN-MADE WASTE.....	22
V.V. Gerasidi, R.G. Dubrovin, V.V. Kukartsev, T.A. Panfilova, G.V. Stas BOOST SYSTEM DIAGNOSTIC PARAMETERS OF COHERENT GAS PISTON INSTALLATIONS OF MINING ENTERPRISES.....	33
E.M. Elekeev, B.P. Stepanov TO THE ISSUE OF EFFICIENCY OF APPLICATION OF THE SAFETY CONTROL PROGRAM AT NUCLEAR FACILITIES.....	48
A.I. Epikhin, A.A. Stupina, I.A. Panfilov, V.V. Bukhtoyarov, N.A. Shepeta DETERMINANTS FOR ASSESSING THE ENERGY EFFICIENCY OF A COAL MINING ENTERPRISE.....	61
E.A. Efremenkov, E.S. Chavrov, E.P. Khaleyeva, V.V. Tynchenko EVALUATION OF TECHNIQUES FOR DETERMINING THE LOADING OF A CYCLOIDAL SATELLITE ROLLING BEARING.....	72
Zh.A. Zhanabayeva, K.T. Narbayeva, G.K. Ismailova, M.S. Ospanova, J. Rodrigo-Illarri ASSESSMENT OF THE RESERVOIRS IMPACT ON THE MAXIMUM RUNOFF OF THE SYRDARYA RIVER.....	85
M.K. Jexenov, Zh.K. Tukhfatov, E.K. Bektay, R.Sh. Abdinov, G.S. Turysbekova STRUCTURAL-TECHTONIC AND MINERALOGICAL STRUCTURE OF INDER LIFTING FIELD, MINING AND CHEMICAL RAW MATERIALS IN ATYRAU REGION.....	96
G.M. Iskaliyeva^{1,2*}, N.K. Sydyk¹, A.K. Kalybayeva^{1,3}, M.S. Sagat¹, A. Samat USE OF WATER INDICES FOR WATERBODIES IN THE ESIL WATER MANAGEMENT BASIN.....	117
Z.M. Kerimbekova, A.A. Tashimova, G.I. Issayev, E.K. Ibragimova, M.Zh. Makhambetov CALCULATION OF ENVIRONMENTAL AND ECONOMIC DAMAGE CAUSED BY CURRENT SYSTEMS OF SOLID WASTE MOVEMENT IN OIL PRODUCTION..	131
M.Zh. Makhambetov, R. Izimova, G.I. Issayev, N.A. Akhmetov, E.K. Ibragimova ECOLOGICAL-GEOLOGICAL ASSESSMENT OF TECHNOGENICALLY DISTURBED TERRITORIES OF OIL FIELDS OF THE ATYRAU REGION.....	143

A.D. Mekhtiyev, V.V. Yugay, Y.G. Neshina, N.B. Kaliaskarov, P. Madi FIBER-OPTIC SYSTEM FOR CONTROLLING OPEN PIT SIDE ROCK DISPLACEMENT.....	157
A.S. Mussina, G.U. Baitasheva, B.S. Zakirov, Ye.P. Gorbulicheva CONDITIONS FOR PREPARING THE SURFACE OF CONTACT PARTS FOR WETTIBILITY WITH MERCURY.....	168
A.N. Muta, R.B. Baimakhan, G.I. Salgarayeva, N. Kurmanbekkyzy, A. Tileikhan STUDY OF THE STRENGTH PROPERTIES OF SOILS COMPOSING THE GEOLOGICAL STRUCTURE OF THE KOK TOBE MOUNTAIN.....	185
B. Mukhambetov, B. Nasiyev, Zh. Kadasheva, R. Abdinov, R. Meranzova ADAPTABILITY OF KOCHIA PROSTRATA (L.) SCHRAD AND CAMPHOROSMA MONSPELIACA AGRICULTURAL ECOSYSTEMS ON SALINE LANDS OF THE NORTHERN CASPIAN DESERT.....	197
M. Nurpeisova, G. Dzhangulova, O. Kurmanbaev, Z. Sarsembekova, A. Ormanbekova, Y.Kh. Kakimzhanov CREATION OF GEODETIC REFERENCE NETWORK FOR MONITORING TRANSPORT INTERCHANGES IN SEISMIC AREAS.....	209
B.T. Ratov, V.L. Khomenko, A.E. Kuttybayev, K.S. Togizov, Z.G. Utepov INNOVATIVE DRILL BIT TO IMPROVE THE EFFICIENCY OF DRILLING OPERATIONS AT URANIUM DEPOSITS IN KAZAKHSTAN.....	224
A.A.Tashimova, G.I. Issayev, Z.M. Kerimbekova, E.K. Ibragimova, A.M. Bostanova ANALYSIS OF THE RESOURCE POTENTIAL OF SOLID OIL PRODUCTION WASTE.....	237
M.K. Tynykulov, O.D. Shoykin, S.O. Kosanov, M.B. Khusainov, Zh.G. Ibraybekov BIOREMEDIATION OF ZONAL SOILS IN AYIRTAY DISTRICT OF NORTH KAZAKHSTAN REGION.....	246
A.S. Urazaliyev, D.A. Shoganbekova, R. Shults, M.S. Kozhakhmetov, G.M. Iskaliyeva INVESTIGATION OF LSMSA APPROACH IN LOCAL GEOID MODELING.....	261

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the work described has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the originality detection service Cross Check <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

ISSN 2518-1483 (Online), ISSN 2224-5227 (Print)

<http://geolog-technical.kz/en/archive/>

Подписано в печать 15.08.2024.

Формат 60x88¹/₈. Бумага офсетная. Печать - ризограф.

15,0 п.л. Тираж 300. Заказ 4.