

ISSN 2518-170X (Online)

ISSN 2224-5278 (Print)



«ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫ» РҚБ
«ХАЛЫҚ» ЖҚ

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

РОО «НАЦИОНАЛЬНОЙ
АКАДЕМИИ НАУК РЕСПУБЛИКИ
КАЗАХСТАН»
ЧФ «Халық»

N E W S

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF
KAZAKHSTAN
«Halyk» Private Foundation

SERIES

OF GEOLOGY AND TECHNICAL SCIENCES

6 (468)

NOVEMBER – DECEMBER 2024

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы «ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы» ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редактор

ЖҰРЫНОВ Мұрат Жұрынұлы, химия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, «Қазақстан Республикасы Ұлттық ғылым академиясы» РҚБ-нің президенті, АҚ «Д.В. Сокольский атындағы отын, катализ және электрохимия институтының» бас директоры (Алматы, Қазақстан) **Н = 4**

Ғылыми хатшы

АБСАДЫКОВ Бахыт Нарикбайұлы, техника ғылымдарының докторы, профессор, ҚР ҰҒА жауапты хатшысы, А.Б. Бектұратов атындағы химия ғылымдары институты (Алматы, Қазақстан) **Н=5**

Редакциялық алқа:

ӘБСАМЕТОВ Мәліс Құдысұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА академигі, «У.М. Ахмедсафина атындағы гидрогеология және геоэкология институтының» директоры (Алматы, Қазақстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтайұлы (бас редактордың орынбасары), геология-минералогия ғылымдарының докторы, профессор, Қ.И. Сатпаев атындағы геология ғылымдары институтының директоры (Алматы, Қазақстан) **Н=2**

СНОУ Дэниел, Ph.D, қауымдастырылған профессор, Небраска университетінің Су ғылымдары зертханасының директоры (Небраска штаты, АҚШ) **Н = 32**

ЗЕЛЪТМАН Реймар, Ph.D, табиғи тарих мұражайының Жер туралы ғылымдар бөлімінде петрология және пайдалы қазбалар кен орындары саласындағы зерттеулердің жетекшісі (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, техника ғылымдарының докторы, Нанси университетінің профессоры (Нанси, Франция) **Н=15**

ШЕН Пин, Ph.D, Қытай геологиялық қоғамының тау геологиясы комитеті директорының орынбасары, Американдық экономикалық геологтар қауымдастығының мүшесі (Пекин, Қытай) **Н = 25**

ФИШЕР Аксель, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, геология-минералогия ғылымдарының докторы, профессор, РФА академигі, А.А. Трофимука атындағы мұнай-газ геологиясы және геофизика институты (Новосибирск, Ресей) **Н = 19**

АГАБЕКОВ Владимир Енокович, химия ғылымдарының докторы, Беларусь ҰҒА академигі, Жаңа материалдар химиясы институтының құрметті директоры (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, Дрезден техникалық университетінің қауымдастырылған профессоры (Дрезден, Берлин) **Н = 20**

СЕЙТМҰРАТОВА Элеонора Юсуповна, геология-минералогия ғылымдарының докторы, профессор, ҚР ҰҒА корреспондент-мүшесі, Қ.И. Сатпаев атындағы Геология ғылымдары институты зертханасының меңгерушісі (Алматы, Қазақстан) **Н=11**

САҒЫНТАЕВ Жанай, Ph.D, қауымдастырылған профессор, Назарбаев университеті (Нұр-Сұлтан, Қазақстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, Бикокк Милан университеті қауымдастырылған профессоры (Милан, Италия) **Н = 28**

«ҚР ҰҒА» РҚБ Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктеуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № **KZ39VPY00025420** мерзімдік басшылық тіркеуіне қойылу туралы куәлік.

Тақырыптық бағыты: *геология, мұнай және газды өңдеудің химиялық технологиялары, мұнай химиясы, металдарды алу және олардың қосындыларының технологиясы.*

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекен-жайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ, 2024

Главный редактор

ЖУРИНОВ Мурат Журинович, доктор химических наук, профессор, академик НАН РК, президент РОО «Национальной академии наук Республики Казахстан», генеральный директор АО «Институт топлива, катализа и электрохимии им. Д.В. Сокольского» (Алматы, Казахстан) **Н = 4**

Ученый секретарь

АБСАДЫКОВ Бахыт Нарикбаевич, доктор технических наук, профессор, ответственный секретарь НАН РК, Институт химических наук им. А.Б. Бектурова (Алматы, Казахстан) **Н = 5**

Редакционная коллегия:

АБСАМЕТОВ Малис Кудысович, (заместитель главного редактора), доктор геолого-минералогических наук, профессор, академик НАН РК, директор Института гидрогеологии и геоэкологии им. У.М. Ахмедсафина (Алматы, Казахстан) **Н = 2**

ЖОЛТАЕВ Герой Жолтаевич, (заместитель главного редактора), доктор геолого-минералогических наук, профессор, директор Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=2**

СНОУ Дэниел, Ph.D, ассоциированный профессор, директор Лаборатории водных наук университета Небраски (штат Небраска, США) **Н = 32**

ЗЕЛЬТМАН Реймар, Ph.D, руководитель исследований в области петрологии и месторождений полезных ископаемых в Отделе наук о Земле Музея естественной истории (Лондон, Англия) **Н = 37**

ПАНФИЛОВ Михаил Борисович, доктор технических наук, профессор Университета Нанси (Нанси, Франция) **Н=15**

ШЕН Пин, Ph.D, заместитель директора Комитета по горной геологии Китайского геологического общества, член Американской ассоциации экономических геологов (Пекин, Китай) **Н = 25**

ФИШЕР Аксель, ассоциированный профессор, Ph.D, технический университет Дрезден (Дрезден, Берлин) **Н = 6**

КОНТОРОВИЧ Алексей Эмильевич, доктор геолого-минералогических наук, профессор, академик РАН, Институт нефтегазовой геологии и геофизики им. А.А. Трофимука СО РАН (Новосибирск, Россия) **Н = 19**

АГАБЕКОВ Владимир Енокович, доктор химических наук, академик НАН Беларуси, почетный директор Института химии новых материалов (Минск, Беларусь) **Н = 13**

КАТАЛИН Стефан, Ph.D, ассоциированный профессор, Технический университет (Дрезден, Берлин) **Н = 20**

СЕЙТМУРАТОВА Элеонора Юсуповна, доктор геолого-минералогических наук, профессор, член-корреспондент НАН РК, заведующая лабораторией Института геологических наук им. К.И. Сатпаева (Алматы, Казахстан) **Н=11**

САГИНТАЕВ Жанай, Ph.D, ассоциированный профессор, Назарбаев университет (Нурсултан, Казахстан) **Н = 11**

ФРАТТИНИ Паоло, Ph.D, ассоциированный профессор, Миланский университет Бикокк (Милан, Италия) **Н = 28**

«Известия РОО «НАН РК». Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информации и общественного развития Республики Казахстан № **KZ39VPY00025420**, выданное 29.07.2020 г.

Тематическая направленность: *геология, химические технологии переработки нефти и газа, нефтехимия, технологии извлечения металлов и их соединений.*

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, оф. 219, тел.: 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© РОО «Национальная академия наук Республики Казахстан», 2024

Editorial chief

ZHURINOV Murat Zhurinovich, doctor of chemistry, professor, academician of NAS RK, president of the National Academy of Sciences of the Republic of Kazakhstan, general director of JSC «Institute of fuel, catalysis and electrochemistry named after D.V. Sokolsky» (Almaty, Kazakhstan) **H = 4**

Scientific secretary

ABSADYKOV Bakhyt Narikbaevich, doctor of technical sciences, professor, executive secretary of NAS RK, Bekturov Institute of chemical sciences (Almaty, Kazakhstan) **H = 5**

Editorial board:

ABSAMETOV Malis Kudysovich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, academician of NAS RK, director of the Akhmedsafin Institute of hydrogeology and hydrophysics (Almaty, Kazakhstan) **H=2**

ZHOLTAEV Geroy Zholtaevich, (deputy editor-in-chief), doctor of geological and mineralogical sciences, professor, director of the institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=2**

SNOW Daniel, Ph.D, associate professor, director of the laboratory of water sciences, Nebraska University (Nebraska, USA) **H = 32**

ZELTMAN Reyman, Ph.D, head of research department in petrology and mineral deposits in the Earth sciences section of the museum of natural history (London, England) **H = 37**

PANFILOV Mikhail Borisovich, doctor of technical sciences, professor at the Nancy University (Nancy, France) **H=15**

SHEN Ping, Ph.D, deputy director of the Committee for Mining geology of the China geological Society, Fellow of the American association of economic geologists (Beijing, China) **H = 25**

FISCHER Axel, Ph.D, associate professor, Dresden University of technology (Dresden, Germany) **H = 6**

KONTOROVICH Aleksey Emilievich, doctor of geological and mineralogical sciences, professor, academician of RAS, Trofimuk Institute of petroleum geology and geophysics SB RAS (Novosibirsk, Russia) **H = 19**

AGABEKOV Vladimir Enokovich, doctor of chemistry, academician of NAS of Belarus, honorary director of the Institute of chemistry of new materials (Minsk, Belarus) **H = 13**

KATALIN Stephan, Ph.D, associate professor, Technical university (Dresden, Berlin) **H = 20**

SEITMURATOVA Eleonora Yusupovna, doctor of geological and mineralogical sciences, professor, corresponding member of NAS RK, head of the laboratory of the Institute of geological sciences named after K.I. Satpayev (Almaty, Kazakhstan) **H=11**

SAGINTAYEV Zhanay, Ph.D, associate professor, Nazarbayev University (Nursultan, Kazakhstan) **H=11**

FRATTINI Paolo, Ph.D, associate professor, university of Milano-Bicocca (Milan, Italy) **H = 28**

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA «National Academy of Sciences of the Republic of Kazakhstan» (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan **No. KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: *geology, chemical technologies for oil and gas processing, petrochemistry, technologies for extracting metals and their connections.*

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, Almaty, 050010, tel. 272-13-19

<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2024

NEWS of the National Academy of Sciences of the Republic of Kazakhstan
SERIES OF GEOLOGY AND TECHNICAL SCIENCES
ISSN 2224-5278
Volume 6. Number 468 (2024), 19–31
<https://doi.org/10.32014/2024.2518-170X.458>

IRSTI 67.21.17
UDC 624.131

© **F.Kh. Aubakirova¹, K.S. Dossaliyev^{1*}, K. Ibragimov¹, K.I. Nazarov²,
A.M. Budikova³, 2024.**

¹South Kazakhstan University named after M. Auezov, Shymkent, Kazakhstan;

²Hydroproekt Institute, Tashkent, Uzbekistan;

³Kyzylorda University named after Korkyt Ata, Kyzylorda, Kazakhstan.

E-mail: dosaliev_k@mail.ru

RESEARCH OF STRENGTH CHARACTERISTICS OF COARSE CLASTIC MATERIAL OF A HIGH EARTHEN DAM

Aubakirova Farida Khabievna – candidate of technical sciences, associate professor of the Department “Industrial, civil and road engineering”, South Kazakhstan University named after M. Auezov, Shymkent, Kazakhstan, E-mail: faraub1011@mail.ru, <https://orcid.org/0000-0002-4687-1528>;

Dossaliyev Kanat Serikuly – PhD, head of the Department “Industrial, civil and road engineering”, South Kazakhstan University named after M. Auezov, Shymkent, Kazakhstan, E-mail: dosaliev_k@mail.ru, <https://orcid.org/0000-0002-5423-9231>;

Ibragimov Kudaiberger – candidate of technical sciences, professor of the Department “Industrial, civil and road engineering”, South Kazakhstan University named after M. Auezov, Shymkent, Kazakhstan, E-mail: askanbayev@bk.ru, <https://orcid.org/0000-0001-6557-4484>;

Nazarov Kamol Igamberdievich – PhD, associate Director of the Hydroproject Institute, Tashkent, Uzbekistan, E-mail: komil_tps@mail.ru, <https://orcid.org/0000-0002-1681-0871>;

Budikova Aigul – candidate of technical sciences, associate professor of the Department “Architecture and construction production”, Kyzylorda University named after Korkyt Ata, Kyzylorda, Kazakhstan, E-mail: construction-work2022@mail.ru, <https://orcid.org/0000-0003-4879-9467>.

Abstract. Currently, in the construction of earth dams and other structures associated with large volumes of coarse-grained materials, multi-fraction rock mass is used instead of sorted stone. Therefore, in construction practice there is increasingly a need to determine the granulometric composition of various coarse ground. Correct determination of the design characteristics of the gravel-pebble mixture and rock mass is extremely important, since this affects the choice of an economical design solution, effective technology for its construction, and trouble-free operation of the constructed structure. The issue of determining the strength characteristics of coarse soil used as a dam material in hydraulic engineering is still relevant in the practice of domestic and world engineering surveys.

The presence of large inclusions in the soil does not allow the use of standard

instruments and requires the development of special instruments and special techniques. The article discusses a plane shear device, provides a methodology for conducting laboratory studies of the strength characteristics of coarse-grained soil and processing its results.

Analysis of laboratory research results shows that a decrease in strength occurs with an increase in stress. This should be taken into account when constructing the thrust prism of the dam, which is the main element of the upper cofferdam, i.e. the thrust prism should be erected in accordance with the requirements of its charged state and uniformity of the material should be achieved when laying soil in different zones of the dam body, this will ensure uniformity of strength properties. A change in the strength properties of coarse soil depending on the grain composition of the stone at the same degree of compaction is possible only by increasing the coefficient of engagement.

Keywords: coarse soil, model mixture, soil strength characteristics, plane shear device, stress state, vertical and horizontal deformations.

©Ф.Х. Аубакирова¹, Қ.С. Досалиев^{1*}, Қ. Ибрагимов¹, К.И. Назаров²,
А.М. Будикова³, 2024.

¹М. Әуезов атындағы Оңтүстік Қазақстан университеті, Шымкент, Қазақстан;

²Гидропроект институты, Ташкент, Өзбекстан;

³Қорқыт Ата атындағы Қызылорда университеті, Қызылорда, Қазақстан .

E-mail: dosaliev_k@mail.ru

ГРУНТТЫ БИІК БӨГЕТТІҢ ІРІСЫНЫҚТЫ МАТЕРИАЛЫНЫҢ БЕРІКТІК СИПАТТАМАЛАРЫН ЗЕРТТЕУ

Аубакирова Фарида Хабиевна – техника ғылымдарының кандидаты, М. Әуезов атындағы Оңтүстік Қазақстан университетінің "Өнеркәсіптік, азаматтық және жол құрылысы" кафедрасының доценті, Шымкент, Қазақстан, E-mail: faraub1011@mail.ru, <https://orcid.org/0000-0002-4687-1528>;

Досалиев Қанат Серікұлы – PhD, М. Әуезов атындағы Оңтүстік Қазақстан университетінің "Өнеркәсіптік, азаматтық және жол құрылысы" кафедрасының меңгерушісі, Шымкент, Қазақстан, E-mail: dosaliev_k@mail.ru, <https://orcid.org/0000-0002-5423-9231>;

Ибрагимов Құдайберген – техника ғылымдарының кандидаты, М. Әуезов атындағы Оңтүстік Қазақстан университетінің "Өнеркәсіптік, азаматтық және жол құрылысы" кафедрасының профессоры, Шымкент, Қазақстан, E-mail: askanbayev@bk.ru, <https://orcid.org/0000-0001-6557-4484>;

Назаров Комил Игамбердиевич – PhD, Гидропроект институті директорының орынбасары, Ташкент, Өзбекстан, komil_tps@mail.ru, <https://orcid.org/0000-0002-1681-0871>;

Будикова Айгуль Молдашевна – техника ғылымдарының кандидаты, Қорқыт Ата атындағы Қызылорда университетінің "Сәулет және құрылыс өндірісі" кафедрасының доценті, Қызылорда, Қазақстан, E-mail: construction-work2022@mail.ru, <https://orcid.org/0000-0003-4879-9467>.

Аннотация. Қазіргі уақытта үлкен көлемдегі ірі түйіршікті материалдармен байланысты жер бөгеттері мен басқа құрылыстарды салуда сұрыпталған тастың орнына көп фракциялы тау жыныстары қолданылады. Сондықтан

құрылыс тәжірибесінде әртүрлі ірі топырақтың гранулометриялық құрамын анықтау қажеттілігі барған сайын арта түсуде. Қиыршық тас қоспасы мен тау массасының жобалық сипаттамаларын дұрыс анықтау өте маңызды, өйткені бұл үнемді жобалық шешімді таңдауға, оны құрудың тиімді технологиясына және салынған құрылымның ақаусыз жұмысына әсер етеді. Гидротехникада бөгет материалы ретінде пайдаланылатын ірі топырақтың беріктік сипаттамаларын анықтау мәселесі отандық және әлемдік инженерлік зерттеулер тәжірибесінде әлі де өзекті болып табылады.

Топырақта үлкен қосындылардың болуы стандартты аспаптарды қолдануға мүмкіндік бермейді және арнайы құралдар мен арнайы техниканы әзірлеуді талап етеді. Мақалада жазық ығысу құрылғысы қарастырылады, ірі түйіршікті топырақтың беріктік сипаттамаларына зертханалық зерттеулер жүргізу және оның нәтижелерін өңдеу әдістемесі қарастырылған.

Зертханалық зерттеулердің нәтижелерін талдау күштің төмендеуі, стресстің жоғарылауымен бірге жүретінін көрсетеді. Бұны бөгеттің тірек призмасын тұрғызу кезінде ескеру керек, ол жоғарғы бөгеттің негізгі элементі болып табылады, яғни итеру призмасы оның зарядталған күйінің талаптарына сәйкес орнатылуы керек және бөгет корпусының әртүрлі аймақтарында топырақты төсеу кезінде материалдың біркелкілігіне қол жеткізу керек, бұл беріктік қасиеттерінің біркелкілігін қамтамасыз етеді. Бірдей тығыздалу дәрежесінде тастың түйіршіктік құрамына байланысты ірі топырақтың беріктік қасиеттерінің өзгеруі тек қосылу коэффициентін арттыру арқылы мүмкін болады.

Түйін сөздер: ірісінықты топырақ, үлгі қоспасы, топырақтың беріктік сипаттамалары, жазық ығысу құрылғысы, кернеу күйі, тік және көлденең деформациялар.

©Ф.Х. Аубакирова¹, К.С. Досалиев^{1*}, К. Ибрагимов¹, К.И. Назаров²,
А.М. Будикова³, 2024.

¹Южно-Казахстанский университет имени М. Ауэзова, Шымкент, Казахстан;

²Институт Гидропроект, Ташкент, Узбекистан;

³Қызылординский университет имени Коркыт Ата, Кызылорда, Казахстан.

E-mail: dosaliev_k@mail.ru

ИССЛЕДОВАНИЕ ПРОЧНОСТНЫХ ХАРАКТЕРИСТИК КРУПНООБЛОМОЧНОГО МАТЕРИАЛА ВЫСОКОЙ ГРУНТОВОЙ ПЛОТИНЫ

Аубакирова Фарида Хабиевна – кандидат технических наук, доцент кафедры «Промышленное, гражданское и дорожное строительство» Южно-Казахстанского университета имени М. Ауэзова, Шымкент, Казахстан, E-mail: faraub1011@mail.ru, <https://orcid.org/0000-0002-4687-1528>;

Досалиев Канат Серикович – PhD, заведующий кафедрой «Промышленное, гражданское и дорожное строительство» Южно-Казахстанского университета имени М. Ауэзова, Шымкент, Казахстан, E-mail: dosaliev_k@mail.ru, <https://orcid.org/0000-0002-5423-9231>;

Ибрагимов Кудайберген – кандидат технических наук, профессор кафедры «Промышленное, гражданское и дорожное строительство» Южно-Казахстанского университета имени М. Ауэзова, Шымкент, Казахстан, E-mail: askanbayev@bk.ru, <https://orcid.org/0000-0001-6557-4484>;

Назаров Комил Игамбердиевич – PhD, заместитель директора института Гидропроект, Ташкент, Узбекистан, komil_tps@mail.ru, <https://orcid.org/0000-0002-1681-0871>;

Будикова Айгуль Молдашевна – кандидат технических наук, доцент кафедры «Архитектура и строительное производство» Кызылординского университета им. Коркыт Ата, Кызылорда, Казахстан, E-mail: construction-work2022@mail.ru, <https://orcid.org/0000-0003-4879-9467>.

Аннотация. В настоящее время при строительстве грунтовых плотин и других сооружений, связанных с большими объемами крупнообломочных материалов, вместо сортированного камня используют многофракционную горную массу. Поэтому в строительной практике все чаще возникает необходимость определения гранулометрического состава различного крупнообломочного грунта. Правильное определение расчетных характеристик гравийно-галечниковой смеси и горной массы имеют исключительно важное значение, так как это влияет на выбор экономичного решения конструкции, эффективной технологии ее возведения, безаварийной эксплуатации построенного сооружения. Вопрос определения прочностных характеристик крупнообломочного грунта, используемого в качестве материала плотины в гидротехническом строительстве, по-прежнему актуально в практике отечественных и мировых инженерных изысканий.

Наличие крупных включений в грунте не позволяет применять стандартные приборы и требует разработки специальных приборов и особых методик. В статье рассмотрен прибор плоского сдвига, приведена методика проведения лабораторных исследований прочностных характеристик крупнообломочного грунта и обработка его результатов.

Анализ результатов лабораторных исследований показывает, что снижение прочности происходит с увеличением напряжения. Это следует учитывать при возведении упорной призмы плотины, которая является основным элементом верховой переемычки. То есть упорную призму следует возводить согласно требованиям ее напряженного состояния и добиваться однородности материала при укладке грунта в разные зоны тела плотины, этим будет обеспечиваться однородность прочностных свойств. Изменение прочностных свойств крупнообломочного грунта в зависимости от зернового состава камня при одинаковой степени уплотнения возможно только за счет увеличения коэффициента зацепления.

Ключевые слова: крупнообломочный грунт, модельная смесь, прочностные характеристики грунта, прибор плоского сдвига, напряженное состояние, вертикальные и горизонтальные деформации.

Introduction. Currently, the rational use of stone materials obtained by explosive mining of rocks is of particular relevance (Ibragimov, et al, 2023; Petrov, et al, 1994; Zhantasov, et al, 2017). Increasingly, instead of sorted stone, rock mass is

used, which is a mixture of a multi-fraction composition. Therefore, in construction practice there is increasingly a need to determine the granulometric composition of various coarse soils. Moreover, if the size of individual fractions reaches 500, 1000 mm or more, then assessing the grain composition using the traditional weight method becomes very labor-intensive. At the same time, the construction of soil structures for large energy facilities, as well as the preparation of foundations for powerful units of thermal power plants, are associated with large volumes of coarse clastic materials. Correct determination of the design characteristics of the gravel-pebble mixture and rock mass is extremely important, since this affects the choice of an economical design solution, effective technology for its construction, and trouble-free operation of the constructed structure (Baibolov, 2022).

A large number of theoretical works and experimental studies are devoted to the study of the strength characteristics of coarse soils. Research conducted under the direction of Shabayev S.N. made it possible to establish that an increase in the particle size of a single-fraction medium leads to an increase not only in the angle of internal friction, but also in specific adhesion (Shabaev, 2020; Shabaev, et al, 2020). He also proposed an improved version of the KU-54 type wedge installation, through which it is possible to adequately evaluate the shear resistance of pre-compacted coarse-grained media using the oblique cut method and identify the strength characteristics of the material, namely the angle of internal friction and adhesion. On a shear installation of a different type, a research group led by Sagybekova A.O. (Alimseitov, et al, 2018) determined that residual strength is a more accurate characteristic of soil resistance. It was concluded that the compaction of coarse soils depends on the grain size, the amount and composition of the filler, the shape of large fragments and the nature of their surface, and the strength of the fragments. They also noted that the compaction of coarse soils also depends on the initial packing density of structural elements. Sainov M.P., studying the works of researchers of the last century (Sainov, 2016), noted that the power function well describes the increase in the value of the shear modulus of coarse soils depending on the soil compression stress. He also determined that gravel-pebble soil is less deformable and has higher strength than rock mass under the same conditions. Research results of Kozionov V.A. (Kozionov, et al, 2007) confirmed the reinforcing effect of large inclusions on the strength properties of coarse soils. A connection has been established between the parameters of strength, structure and physical state of the soil. It is noted that with an increase in the size of inclusions and their number, the strength characteristics of the soil increase, and an increase in humidity leads to their decrease. A group of researchers led by Kolos A.F. (Kolos, 2017) revealed that increasing the roundness of grains leads to a significant decrease in the adhesion between grains in crushed stone ballast, but has almost no effect on the angle of internal friction. Among the modern publications devoted to solving this problem abroad, the following authors can be noted: Ghorashi S., Khodaparast M., Khodajooyan Q. (Ghorashi, et al, 2023), Fard M. (Fard, 2020), Wu E., Zhu J., Guo W., Zhang Z. (Wu, et al, 2020) and others.

Research materials and methods. In construction practice, two devices are used to study the strength characteristics of coarse soils in laboratory conditions: a plane shear device and a stabilometer (Artykbaev, et al, 2024).

In plane shear devices, the measured parameters in tests are normal σ and shear stresses τ in the shear plane, from which the shear coefficient C_s is calculated.

In a stabilometer, unlike a plane shear device, two main stresses are measured: maximum σ_1 and minimum σ_3 ($\sigma_1 = \sigma_3$). In this case, the shear coefficient can be calculated only after preliminary calculations of normal and shear stresses along the destruction sites according to the formulas:

$$\sigma = \frac{2\sigma_1\sigma_3}{\sigma_1 + \sigma_3} \quad (1)$$

$$\tau = \frac{\sigma_1 - \sigma_3}{\sigma_1 + \sigma_2} \cdot \sqrt{\sigma_1\sigma_3} \quad (2)$$

$$C_s = \frac{\sigma_1 - \sigma_3}{2\sqrt{\sigma_1\sigma_3}} \quad (3)$$

Taking this into account, the results of experiments both in plane shear devices and in stabilometers can be interpreted in the same way in the form of the dependence $C_s = f(\sigma)$, i.e. according to the Coulomb-Mohr theory. Numerous studies carried out by various organizations on these devices show almost the same results. Only the experimental methodology and interpretation of the results are somewhat different.

It should be noted that using a plane shear device it is possible to examine coarse-grained soils that are close in grain composition to natural ones. At the same time, working with this device is characterized by a simple research methodology. Also, when testing rock mass (broken stone), from an economic point of view, the use of this device is more profitable than the use of a stabilometer.

The flat shift device with dimensions 700x700x700mm consists of the following main elements: lower and upper carriages; hydraulic jacks for creating vertical and horizontal loads and deflectometers for measuring vertical and horizontal deformations. The movable lower carriage is a metal container on rolling supports. The fixed upper carriage is a frame placed on the rollers along the lower carriage. The soil sample is placed in a container formed between the upper and lower carriages. The vertical load on the sample is transmitted through the dies. The load on the die is created by a hydraulic jack DG-100 and controlled by a pressure gauge. The horizontal load is created by a horizontal jack, its magnitude is also controlled by a pressure gauge. The carriage movements are recorded by deflectometers.

One of the important stages of preparation for conducting experiments is calibrating the hydraulic system of the device, which includes the pump, pressure line and jack. Calibration is carried out using two standard dynamometers with measurement limits of 50-100 tons. In this case, the dynamometer is installed between the support beam and the jack (for vertical and horizontal loads) (GOST 12248.1, 2020). Pressure is created through a pumping station. Increasing the

pressure, take readings on the pressure gauge and dynamometer. The obtained data is superimposed for each jack on a graph reflecting the pressure loss in the system with increasing load.

The significant size of fractions of coarse soils (100, 200, 500 mm and more) requires labor-intensive and expensive experiments on unique large-sized installations. For this reason, in the practice of experimental research, much attention has to be paid to the issues of modeling the composition, size and other parameters of coarse soils. Based on the condition that the ratio of the diameter of the device to the size of the maximum fraction should not be less than five (Artykbaev, et al, 2024; GOST 30416-2020, 2020), i.e. $d_{dvc} \geq 5d_{max}$, then for our flat shear device with dimensions 700x700x700 mm, grain compositions are accepted with a maximum diameter $d_{max}=140$ mm.

If natural soil has fraction sizes exceeding the capabilities of the device, then experiments are carried out with model mixtures. In this case, the model mixture is composed of natural soil material with a fraction reduction in n times, i.e., the grain composition curves of the natural and model soil must be parallel, and the grain composition of the model soil is limited to the maximum fraction $d_{max}=140$ mm, i.e., the modeling scale is selected so as not to exceed the maximum fraction size. Full-scale and model soil compositions are shown in Figure 1. Moreover, on the recommendation of specialists from the National Research University MSCU, the model mixture was compiled with a maximum fraction of 120 mm.

The sequence of work when testing the strength characteristics of coarse soil using a plane shear device is as follows:

1) the sizes of the diameters of model soil fractions is calculated by multiplying the diameters of natural soil fractions by a scale factor and the soil for experiments is prepared;

2) prepared soil of model or natural composition is placed in layers in the carriages of the device. In this case, the thickness of the soil laying layer is $h=1.2 \cdot d_{max}$; in our case, the thickness of the soil layer was 14 cm. Each layer is compacted using a manual tamper. The soil being laid is weighed and the average density of the soil in the device is calculated. The range of soil density in our case was 1.98÷2.03t/m³;

3) after placing the soil in the device, its assembly is completed: a die, vertical and horizontal jacks, a thrust beam, thrust and support nuts, and deflectometers are installed. The initial value of the vertical position of the die is recorded;

4) the vertical load is created by a vertical jack in increments of 0.05-0.1 MPa to a given value and is controlled by a pressure gauge. When a given load is reached, the values of vertical deformation are recorded based on the die settlement at each load level;

5) after reaching the vertical load of a given value, a horizontal load is applied in increments of no more than 0.05 MPa. Moreover, when a horizontal load is applied, the vertical load must remain unchanged;

6) the shear moment is recorded by the growth of horizontal deformations noted by deflectors at a constant shear (horizontal) force;

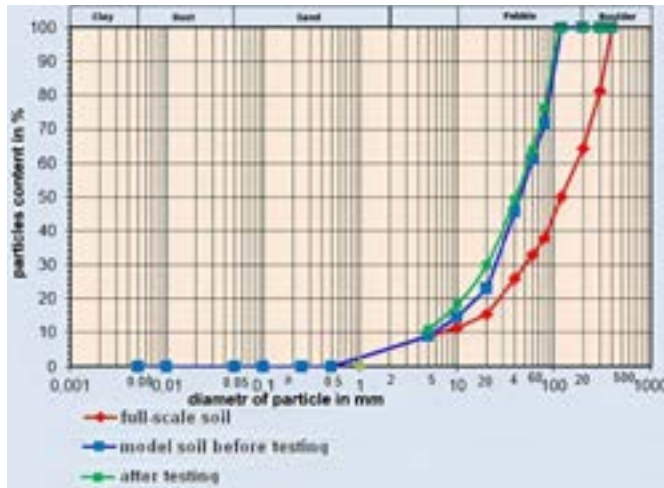


Figure 1. Graph of the grain composition of natural soil and model mixture before and after the experiment

7) after the end of the experiment, the pressure in the jacks is released: first vertical, then horizontal. Then the device is disassembled, the soil is sieved into fractions through sieves and each fraction is weighed. Next, a grain composition curve is constructed after the experiment, as shown in Figure 1. Analysis of the grain composition after the experiment provides information about the crushability of each fraction of the soil composition;

It should be noted that in connection with the transition of the assessment of strength characteristics to a confidence probability, standard and calculated values of the material should be established by statically processing the results of experimental data in an amount of at least six for each vertical load. In our case, there are 4 variants of vertical load, the number of experiments was 24 accordingly.

Results and discussion. Shear tests are performed for 4 variants of vertical loads: 2; 4; 8; 12 kgf/cm². Based on experimental research data, graphs are constructed $\tau=f(\Delta l)$; $\tau=f(\sigma)$, where τ - horizontal stresses, shifts; Δl - magnitude of horizontal deformations, mm; σ - vertical pressure values, kg/cm².

Determination of the shear coefficient $tg\phi$ and engagement C are calculated using the least squares method using the formulas:

$$tg\phi = \frac{n \sum_{i=1}^n \sigma_i \tau_i - \sum_{i=1}^n \sigma_i \sum_{i=1}^n \tau_i}{n \sum_{i=1}^n \sigma_i^2 - (\sum_{i=1}^n \sigma_i)^2} \quad (4)$$

$$C = \frac{\sum_{i=1}^n \sigma_i^2 \sum_{i=1}^n \tau_i^2 - \sum_{i=1}^n \sigma_i \sum_{i=1}^n \tau_i \sigma_i}{n \sum_{i=1}^n \sigma_i^2 - (\sum_{i=1}^n \sigma_i)^2} \quad (5)$$

where n - number of experiments; C - engagement.

The determination of the principal stresses σ_1 and σ_3 is carried out by constructing the Mohr circle. Assuming that there is no coupling, (4) takes the form

$$\tau = \sigma \cdot \operatorname{tg}\phi \quad (6)$$

The point of intersection of the circle with the abscissa axis will give the desired value of the main stresses σ_1 and σ_3 , and the angle of inclination of the tangent to the abscissa axis will be the angle of internal friction ϕ for a given vertical stress.

The shear coefficients $\operatorname{tg}\phi$ and engagement coefficients C are calculated using the least squares method. If there is adhesion or engagement for the stone material (rock mass), the shear angle is determined by the formula:

$$\operatorname{tg}\psi = \operatorname{tg}\phi + \frac{C}{\sigma} \quad (7)$$

where ψ - shear angle; ϕ - angle of internal friction; C - engagement; σ - vertical stress.

The calculated strength values are obtained by dividing the standard values by the soil safety factor, the physical meaning of which is that the actual values of the strength characteristics will not exceed the maximum strength of the soil with the corresponding confidence probability.

The soil safety factor is calculated from a set of paired measurements of vertical stresses and shear loads from σ_{\min} to σ_{\max} and depends on the variation of these values, i.e., the coefficient of variation “ V ”:

$$\Delta = n \sum_{i=1}^n (\sigma_i)^2 - (\sum_{i=1}^n \sigma_i)^2 \quad (8)$$

$$\operatorname{tg}\phi = \frac{1}{\Delta} (n \sum_{i=1}^n \tau_i \sigma_i - \sum_{i=1}^n \tau_i \sum_{i=1}^n \sigma_i) \quad (9)$$

$$c = \frac{1}{\Delta} (\sum_{i=1}^n \tau_i \sum_{i=1}^n \sigma_i^2 - \sum_{i=1}^n \sigma_i \sum_{i=1}^n \tau_i \sigma_i) \quad (10)$$

We obtained the calculated strength values by dividing the standard values by the safety factor for the soil and have presented in Table 1. This means that the actual values of the strength characteristics will not exceed the limit values of soil strength with the corresponding confidence probability.

Table 1 - Strength characteristics of rock mass depending on vertical pressure

Vertical stress σ , kgf/cm ²	2	4	8	12
Shift coefficients $\operatorname{tg}\phi$	1,149	0,958	0,862	0,831
Angle of internal friction ϕ°	48,9	43,8	40,8	39,7

Analysis of the data in Table 1 shows that a decrease in strength occurs with an increase in stress. This should be taken into account when constructing the thrust prism of the dam, which is the main element of the upper cofferdam, i.e., the thrust prism should be erected in accordance with the requirements of its charged state and uniformity of the material should be achieved when laying soil in different zones of the dam body, which will ensure uniformity of strength properties.

The results of the studies are shown below on the dependence graphs $\tau=f(\Delta l)$ for 4 variants of vertical load (Figures 2-5) and the dependence graph $\tau=f(\sigma)$ presented in Figure 6.

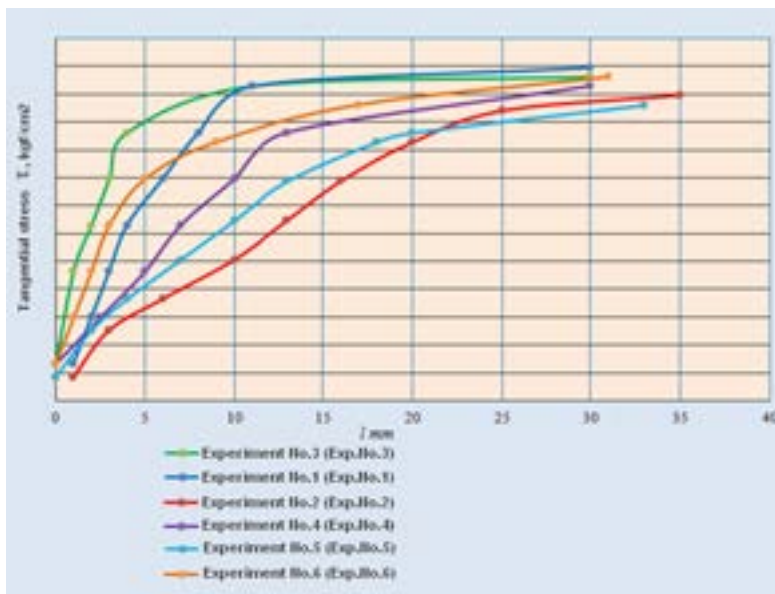


Figure 2. Dependence graph $\tau=f(\Delta l)$ at a load of 2 kgf/cm²

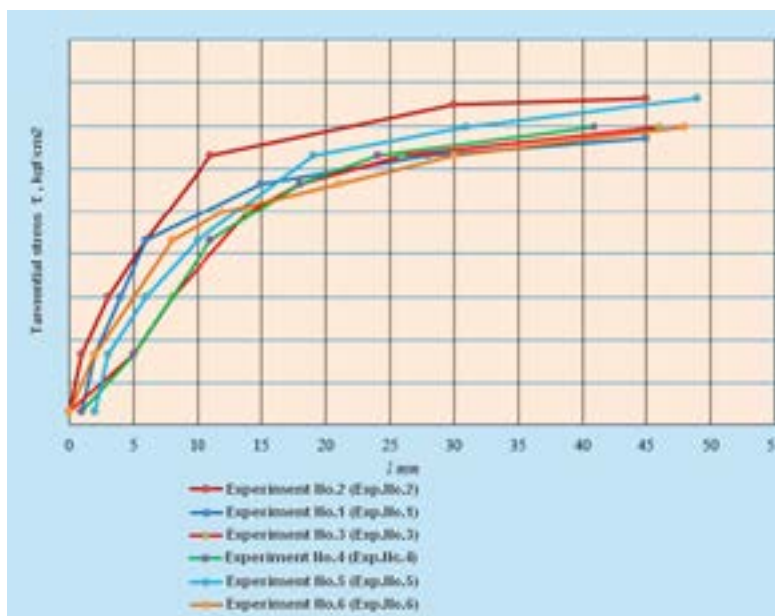


Figure 3. Dependence graph $\tau=f(\Delta l)$ at a load of 4 kgf/cm²

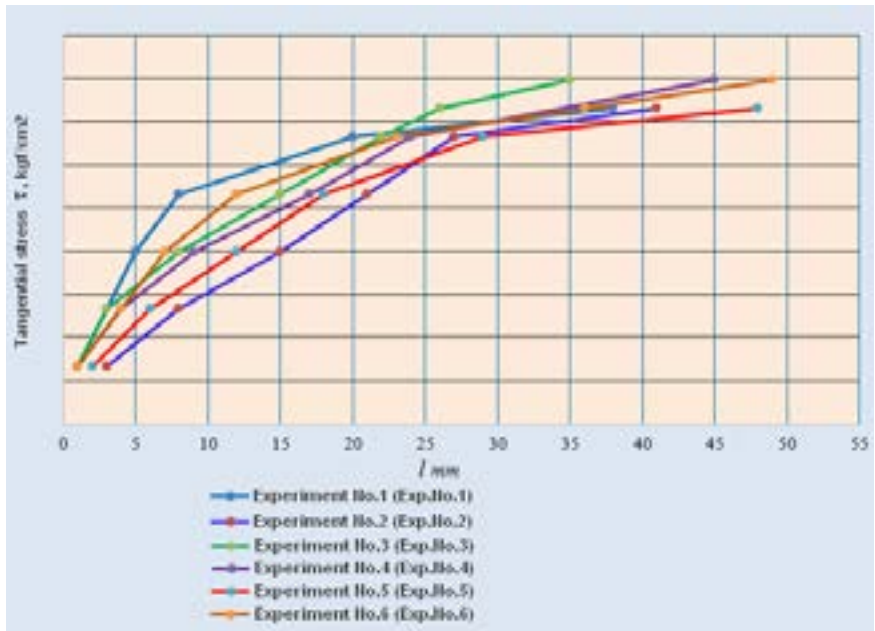


Figure 4. Dependence graph $\tau=f(l)$ at a load of 8 kgf/cm²

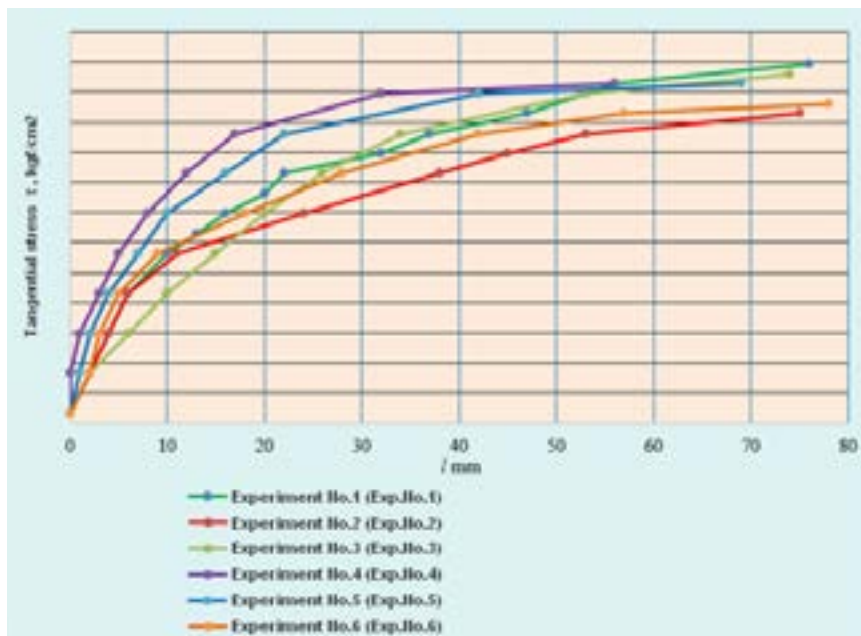


Figure 5. Dependence graph $\tau=f(l)$ at a load of 12 kgf/cm²

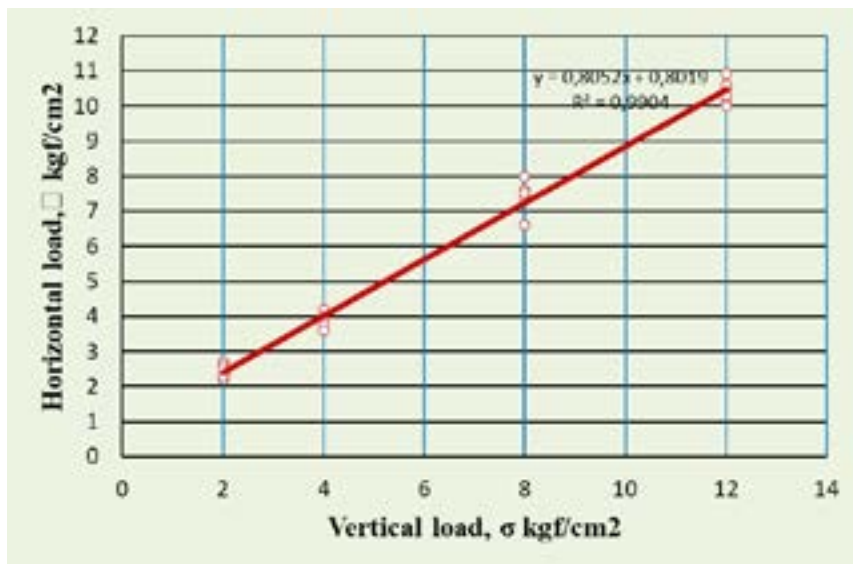


Figure 6. Dependency graph $\tau=f(\sigma)$

Conclusions. The experimental studies of the strength characteristics of the rock mass under single-plane shear conditions allow us to draw the following conclusions:

- strength indicators determined from the results of tests under vertical loads from 2.0 to 12.0 kg/cm², compressive σ and shear τ stresses at the moment of sample failure are accepted according to the Coulomb-Mohr condition. The number of experiments and processing of the results were carried out in accordance with the requirements of regulatory documents (SN RK 3.04-03-2023, 2023; GOST 20522-2012, 2014).

- based on the results obtained, calculated characteristics were established for the actual particle size distribution with a confidence probability $\alpha = 0.95$, which are characterized by a shear angle $\phi = 48.9$ to 39.7° depending on the value of the vertical load from 2.0 to 12.0 kg/cm².

- a change in the strength properties of coarse soil depending on the grain composition of the stone at the same degree of compaction is possible only by increasing the C coefficient of engagement.

References

Artykbaev D.Zh., Ibragimov K., Aubakirova F.Kh., Karatayev M., Polat E. (2024). Research and laboratory methods for determining coarse soils at the experimental site during the construction of an earth dam. NEWS of the National Academy of Sciences of the Republic of Kazakhstan. Series of Geology and Technical Sciences. Vol.2. No. 464: 8-23. <https://doi.org/10.32014/2024.2518-170X.390> (in Eng).

Baibolov K., Artykbaev D., Aldiyarov Zh., Karshyga G. (2022). Experimental investigations of the coarse-grained soil in the dam of the pskem hep / NEWS of the National Academy of Sciences

of the Republic of Kazakhstan. Series of Geology and Technical Sciences. Vol.1. No. 451.pp.21-32. <https://doi.org/10.32014/2022.2518-170X.136> (in Eng).

Fard M. (2020). A method for determining hydraulic conductivity and diffusivity of unsaturated soils. *Unsaturated Soils for Asia*; Sep 10, pp.375–379. <http://dx.doi.org/10.1201/9781003078616-64> (in Eng).

Ghorashi S., Khodaparast M., Khodajooyan Q. (2023). Compaction Quality Control of Coarse-grained Soils Using Dynamic Penetration Test Results through Correlation with Relative Compaction Percentages. *International Journal of Engineering*. 36(3), pp.473–480. <http://dx.doi.org/10.5829/ije.2023.36.03c.06> (in Eng).

Ibragimov K., Ussenkulov Zh.A., Yerimbetov B.T., Baibolov K.S., Kunanbayeva Y.B. & Ussenkulova S.Zh. (2023). Strength and deformability of large-scale clastic soils / *Proceedings of 17-th Asian regional on soil mechanics and geotechnical engineering conference (17ARC) «Smart geotechnics for smart societies»*, Kazakhstan, pp.862-866. (in Eng).

Wu E., Zhu J., Guo W., Zhang Z. (2020). Effect of Gradation on the Compactability of Coarse-Grained Soils. *KSCE Journal of Civil Engineering*. Jan 15;24(2). pp.356-364. <http://dx.doi.org/10.1007/s12205-020-1936-7> (in Eng).

Zhantassov K.T., Dosaliyev K.S., Bosak V.N., Kunanbaeva Ya.B., Ussenkulov Zh.A., Naukenova A.S., Tulenov A. (2017). Material of box-type pavement / *NEWS of the National Academy of Sciences of the Republic of Kazakhstan. Series of Geology and Technical Sciences*. 5(425). pp.238-243. (in Eng).

Alimseitov D.N., Gorbachev A.G., Ryspaev B.S., Sagybekova A.O. (2018). Study of the strength characteristics of coarse soil and the model of coarse soil [Izucheniye prochnostnykh kharakteristik krupnooblochnogo grunta i modeli krupnooblochnogo grunta]. *Problems of Science [Problemy nauki]*. No. 12. P.34-37.

GOST 12248.1-2020 Soils. Determination of strength parameters by shear strength testing

GOST 30416-2020 Soils. Laboratory testing.

GOST 20522-2012 Soils. Statistical treatment of the test results

Kolos A.F., Chistyakov P.A., Leus A.S., Shekhtman E.I., Shtykov V.I. (2017). The influence of the shape of crushed stone ballast grains on its strength properties [Vliyaniye formy zeren shchebenochnogo ballasta na yego prochnostnyye svoystva]. *Bulletin of scientific research results [Byulleten' rezul'tatov nauchnykh issledovaniy]*. P. 148-160.

Kozionov V.A., Kuderin M.K., Varlamova L.A., Kulzhiginov R.K. (2007). Assessment of the strength of clayey soils with inclusions of debris and crushed stone [Otsenka prochnosti glinistykh gruntov s vlyucheniymi dresvy i shchebnya]. *Science and Technology of Kazakhstan [Nauka i tekhnika Kazakhstana]*. No.2. pp.18-26.

Sainov M.P. (2016). Parameters of deformability of coarse soils in the body of soil dams [Parametry deformiruyemosti krupnooblochnykh gruntov v tele gruntovykh plotin]. *Construction: science and education [Stroitel'stvo: nauka i obrazovaniye]*. No.1. P.15-33.

Petrov G.N., Radchenko V.G., Dubnyak V.A. (1994). Coarse soils in hydraulic engineering [Krupnooblochnyye grunty v gidrotekhnicheskoy stroitel'stve]. St. Petersburg: JSC B.E. Vedenev VNIIG.

SN RK 3.04-03-2023 Osnovaniya gidrotekhnicheskikh sooruzheniy [Foundations of hydraulic structures]

Shabaev S.N. (2020). The influence of the particle size of a one-dimensional loose granular medium on the strength characteristics [Vliyaniye krupnosti chastits odnorazmernoy sypuchey zernistoy sredy na prochnostnyye kharakteristiki]. *Bulletin of G.I. Nosov Magnitogorsk State Technical University*. Vol.18. No. 2. P.62-70.

Shabaev S.N., Krupina N.V., Shalamanov V.A. et al. (2020). Oblique cut method for determining the strength characteristics of pre-compacted coarse-grained media [Metod kosogo sreza dlya opredeleniya prochnostnykh kharakteristik predvaritel'no uplotnennykh krupnozernistykh sred]. *News of the Ural State Mining University*. Vol.3. P.115-122.

CONTENT

B.O. Adyrbaev, A.Z. Darkhan, B.O. Yessimov, T.A. Adyrbaeva, E.S. Dubinina SYNTHESIS OF CERAMIC GRANITE BASED ON DOMESTIC FELDSPAR RAW MATERIALS.....	6
F.Kh. Aubakirova, K.S. Dossaliyev, K. Ibragimov, K.I. Nazarov, A.M. Budikova RESEARCH OF STRENGTH CHARACTERISTICS OF COARSE CLASTIC MATERIAL OF A HIGH EARTHEN DAM.....	19
D.S. Akhmetova, K.M. Saginov, Yeginbayeva A.Ye, K.M. Arykbaeva, R.N.Kenzhebay ANALYSIS OF LANDSCAPE STRUCTURES OF THE TURKESTAN REGION.....	32
D.K. Bekbergenov, G.K. Jangulova, R.K. Zhanakova, B. Bektur INVESTIGATION OF THE BLOCK CAVING GEOTECHNOLOGY AT DEEP HORIZONS.....	49
I.S. Brovko, D.Zh. Artykbaev, K.S. Baibolov, M. Karatayev THE PRACTICE OF CONSTRUCTING EARTHWORKS IN THE SOUTH OF KAZAKHSTAN.....	67
D.I. Vdovkina, M.V. Ponomareva, Y.V. Ponomareva, O.Y. Koshliakov, K.Y. Borisova ZONING OF KARAGANDA CITY TERRITORY ACCORDING TO THE STABILITY DEGREE OF THE GEOLOGICAL ENVIRONMENT.....	84
Zh.B. Dossymbekova, L.Z. Issayeva, K.S. Togizov, D.B. Muratkhanov, O.N. Maksutov THE SPECIFICS OF RARE EARTH INCLUSION IN ORE MINERALS OF RARE METAL DEPOSITS OF KAZAKHSTAN.....	99
T.A. Panfilova, V.V. Kukartsev, K.V. Degtyareva, E.V. Khudyakova, M.N. Stepansevich INTELLIGENT METHODS FOR CLASSIFYING ROCKS BASED ON THEIR CHEMICAL COMPOSITION.....	114

D.S. Saduakassov, M.T. Tabylganov, A.R. Togasheva, A.T. Zholbasarova, R.U. Bayamirova THE INFLUENCE OF WELLBORE AND BIT DIAMETER RATIO ON MINIMUM RADIUS PARAMETERS AND CHANGES IN WELLBORE DEVIATION ANGLE.....	126
T.K. Salikhov, Zh.M. Karagoishin, A.M. Gibadilova, Zh.K. Bakhov, S.E. Zhumabayeva GEOECOLOGICAL RESEARCH ON THE TERRITORY OF THE STATE NATURAL RESERVE "BOKEYORDA" OF THE WEST KAZAKHSTAN REGION.....	141
V.N. Talamanov, E.V. Khekert, R.G. Dubrovin, G.L. Kozenkova, V.A. Kozenkov VIBRO-ROLLING OF PARTIALLY REGULAR MICRORELIEFS FOR MINING EQUIPMENT SURFACES.....	155
K.K. Tolubayeva, E.V. Blinaeva DEVELOPMENT OF AN ECOLOGICALLY CLEAN TECHNOLOGICAL UNIT FOR HEAT AND ELECTRIC POWER GENERATION.....	167
J. Toshov, K. Yelemessov, U. Baynazov, T. Annakulov, D. Baskanbayeva CHALLENGES OF MODERNIZING AND OPTIMIZING THE PROCESS OF IM-PLEMENTING CYCLICAL-FLOW TECHNOLOGY IN A COAL MINE.....	182
V.V. Tynchenko, O.I. Kukartseva, V.S. Tynchenko, K.I. Kravtsov, L.V. Krasovskaya INTELLIGENT SYSTEMS FOR ANALYZING CLIMATIC CONDITIONS IN MINING REGIONS.....	198
A. Sharapatov, N. Assirbek, A. Saduov, M. Abdyrov, B. Zhumabayev CONSOLIDATED GEOLOGICAL AND GEOPHYSICAL CHARACTERISTICS OF URANIUM DEPOSIT ROCKS AND PROSPECTS FOR THEIR UTILIZATION (SHU-SARYSU PROVINCE, KAZAKHSTAN).....	210

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайтах:

**www.nauka-nanrk.kz
<http://www.geolog-technical.kz/index.php/en/>
ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)**

Директор отдела издания научных журналов НАН РК *А. Ботанқызы*

Редакторы: *Д.С. Аленов, Ж.Ш. Әден*

Верстка на компьютере *Г.Д. Жадыранова*

Подписано в печать 15.12.2024.

Формат 70x90^{1/16}. Бумага офсетная. Печать – ризограф.
14,5 п.л. Тираж 300. Заказ 6.