

**ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)**

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ФЫЛЫМ АКАДЕМИЯСЫНЫҢ
Satbayev University

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Satbayev University

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Satbayev University

**SERIES
OF GEOLOGY AND TECHNICAL SCIENCES**

1 (445)

JANUARY – FEBRUARY 2021

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруды. Web of Science зерттеушілер, авторлар, баспашилар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енүі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контенттеге адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редакторы
э. ф. д., профессор, КР ҮФА академигі
И.К. Бейсембетов

Бас редакторының орынбасары
Жолтаев Г.Ж. проф., геол.-мин. ф. докторы

Редакция алқасы:

Абаканов Т.Д. проф. (Қазақстан)
Абишева З.С. проф., академик (Қазақстан)
Абсадыков Б.Н. проф., корр.-мүшесі (Қазақстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Әзіrbайжан)
Бакиров А.Б. проф., (Қыргызстан)
Буктуков Н.С. проф., академик (Қазақстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Тәжікстан)
Грэвис Р.М. проф. (АҚШ)
Жарменов А.А. проф., академик (Қазақстан)
Конторович А.Э. проф., академик (Ресей)
Курскеев А.К. проф., академик (Қазақстан)
Курчавов А.М. проф., (Ресей)
Медеу А.Р. проф., академик (Қазақстан)
Оздөев С.М. проф., академик (Қазақстан)
Постолатий В. проф., академик (Молдова)
Степанец В.Г. проф., (Германия)
Штейнер М. проф. (Германия)

«КР ҮФА Хабарлары. Геология және техникалық ғылымдар сериясы».

**ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)**

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РКБ (Алматы қ.).

Қазақстан Республикасының Ақпарат және қоғамдық даму министрлігінің Ақпарат комитетінде 29.07.2020 ж. берілген № KZ39VPY00025420 мерзімдік басылым тіркеуіне қойылу туралы қуәлік.

Тақырыптық бағыты: геология және техникалық ғылымдар бойынша мақалалар жариялау.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219, 220 бөл.,
тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2021

Типографияның мекенжайы: «NurNaz GRACE», Алматы қ., Рысқұлов көш., 103.

Г л а в н ы й р е д а к т о р
д. э. н., профессор, академик НАН РК
И. К. Бейсембетов

Заместитель главного редактора
Жолтаев Г.Ж. проф., доктор геол.-мин. наук

Р е д а к ц и о н на я кол л е г и я:

Абаканов Т.Д. проф. (Казахстан)
Абишева З.С. проф., академик (Казахстан)
Абсадыков Б.Н. проф., чл.-корр. (Казахстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Азербайджан)
Бакиров А.Б. проф., (Кыргызстан)
Буктуков Н.С. проф., академик (Казахстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Таджикистан)
Грэвис Р.М. проф. (США)
Жарменов А.А. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Россия)
Курскеев А.К. проф., академик (Казахстан)
Курчавов А.М. проф., (Россия)
Медеу А.Р. проф., академик (Казахстан)
Оздоев С.М. проф., академик (Казахстан)
Постолатий В. проф., академик (Молдова)
Степанец В.Г. проф., (Германия)
Штейнер М. проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации Министерства информационного и общественного развития Республики Казахстан № KZ39VPY00025420, выданное 29.07.2020 г.

Тематическая направленность: публикация статей по геологии и технических наук.

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2021

Адрес типографии: «NurNaz GRACE», г. Алматы, ул. Рыскулова, 103.

Editor in chief
doctor of Economics, professor, academician of NAS RK
I. K. Beisembetov

Deputy editor in chief
Zholtayev G.Zh. prof., dr. geol-min. sc.

Editorial board:

Abakanov T.D. prof. (Kazakhstan)
Abisheva Z.S. prof., academician (Kazakhstan)
Absadykov B.N. prof., corr. member. (Kazakhstan)
Agabekov V.Ye. academician (Belarus)
Aliyev T. prof., academician (Azerbaijan)
Bakirov A.B. prof., (Kyrgyzstan)
Buktukov N.S. prof., academician (Kazakhstan)
Bulat A.F. prof., academician (Ukraine)
Ganiyev I.N. prof., academician (Tadzhikistan)
Gravis R.M. prof. (USA)
Zharmenov A.A. prof., academician (Kazakhstan)
Kontorovich A.Ye. prof., academician (Russia)
Kurskeyev A.K. prof., academician (Kazakhstan)
Kurchavov A.M. prof., (Russia)
Medeu A.R. prof., academician (Kazakhstan)
Ozdoyev S.M. prof., academician (Kazakhstan)
Postolatii V. prof., academician (Moldova)
Stepanets V.G. prof., (Germany)
Steiner M. prof. (Germany)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

**ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)**

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty).

The certificate of registration of a periodical printed publication in the Committee of information of the Ministry of Information and Social Development of the Republic of Kazakhstan No. **KZ39VPY00025420**, issued 29.07.2020.

Thematic scope: publication of papers on geology and technical sciences.

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2021

Address of printing house: «NurNaz GRACE», 103, Ryskulov str, Almaty.

NEWS

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 1, Number 445 (2021), 6 – 12

<https://doi.org/10.32014/2021.2518-170X.1>

UDC 621.396.93:614.8

IRSTI 47.09.53

**Zh. S. Abdimuratov¹, Zh. D. Manbetova¹, M. N. Imankul²,
K. S. Chezhimbayeva¹, D. A. Davronbekov⁴**

¹Almaty University of Energy and Communications named after Gumarbek Daukeev, Almaty, Kazakhstan;

²Eurasian National University named after L.N.Gumilyov, Nur-Sultan, Kazakhstan;

³Tashkent University of Information Technologies named after Muhammad Al-Khwarizmi, Tashkent, Uzbekistan

E-mail: zh.abdymuratov@aues.kz, zmanbetova@inbox.ru, mimankul57@gmail.com,
katipa67@yandex.ru, d.davronbekov@tuit.uz

ABSORBERS OF ELECTROMAGNETIC RADIATION BASED ON SHUNGITE SPECIES

Abstract. In recent decades, the industries have experienced rapid development of various technologies directly or indirectly related to the emission of electromagnetic energy into the environment. The number of emitting technical means in production and in everyday life is increasing. At present, there are different ways, methods and materials to reduce the effects of electromagnetic radiation.

The properties of absorbers of electromagnetic radiation (EMR), formed on the basis of domestic natural material of shungite species from the deposit of the mining company "Koksu", Almaty region, are considered. The results of the interaction of EMR with samples of materials of absorbers and the dependence of the transmission coefficients on the angle of incidence of electromagnetic waves (EMW) in the frequency range 5.3-10.6 GHz are obtained. Research in these frequency ranges is crucial and relevant with the development and transition in the future of systems and mobile cellular networks of promising generations to higher radio frequency ranges. The use of powdered shungite for the creation of EMR absorbers in ultra-high-frequency radiation (UHFR) range has not yet been studied enough.

Technological values of the selected EMR absorbers in comparison with other geomaterials: strength of stone-like shungite species, high indicators of density (for example, 2.61 g/cm³ – "TS" brand; 2.49 g/cm³ – "TK" brand) and mechanical resistance, high thermal and chemical stability, low cost, good mixing with binders. The test samples provide a decrease of EMR level due to the presence of absorption effects.

Key words: ultra-high frequency, electromagnetic radiation, absorber of electromagnetic radiation, shungite, reflection and transmission coefficients.

Introduction. Human exposure to anthropogenic EMF has increased to unprecedented levels, accompanied by an increase in various health problems. The proliferation of cellular antennas and other RF-generating devices in recent decades has led to increasing concern about potential consequences of EMR exposure to human health [1].

The solution to these problems can be found by weakening the level of EMR generated by electronic equipment by using EMR absorbers. Today, various materials and methods are applied to protect against EMR [2-4].

An important task to be solved by this work was to study the absorption properties of domestic species of shungite of two brands - finely dispersed carbonate taurite "TK-D" and shale finely dispersed taurite "TS-D" in order to establish the most efficient EMR absorbers of this class.

The main processes that lead to the weakening of EMW in EMR absorbers are reflection, absorption and multiple re-reflection of EMW from the interfaces of dissimilar media inside multilayer structures. Moreover, in most cases, it becomes necessary to reduce the value of the reflection coefficient, which is

implemented by such constructive solutions as multilayer structures, which can be a geometrically inhomogeneous structure with a gradient change in properties along the depth of the structure. The optimal version of the performance of wide-range EMR absorbers with reduced weight and size characteristics, not subject to corrosion, are structures based on carbon-containing fillers such as finely dispersed powdered shungite, fixed in a binder.

Shungite is a mineral of complex chemical composition with a carbon-silicate base represented by graphite-like globular carbon and silicon oxide, mainly in the form of quartz. Components such as silicon oxide and carbon usually have the largest share in the chemical composition of shungite. Other components of the mineral under consideration are oxides of aluminum, iron, titanium and some other elements, etc.

The trademarks of the Koksu shungite species "Taurit" are obtained by crushing and dry grinding operations that comply with the current regulatory requirements of the Kazakh company "GRK Koksu" LLP (ST 60-1907-23-TOO-001-2014). [5] When creating EMR absorbers in UHFR range, it is possible to use carbon-containing minerals shungite, the technological advantages of which are their low cost, chemical and thermal stability, good miscibility with binders, for which we used a silicone sealant.

The properties of shungite species are determined by two factors: properties of shungite carbon; the structure of the species and the relationship of carbon and silicates [5]. The complete chemical composition of two types of shungite from the Koksu deposit with the trademarks fine-dispersed carbonate taurite "TK-D" and fine-dispersed shale taurite "TS-D" are given in table 1 and table 2 respectively. Note that "TS-D" and "TK-D" represent a fine powder or granules from dark gray to black.

Table 1 – Chemical composition of fine-dispersed carbonate taurite "TK-D"

Determined components	C	SiO ₂	CaO	MgO	Fe ₂ O ₃	Al ₂ O ₃	TiO ₂	K ₂ O	Na ₂ O
Content of components in %	7,0-15,0	30,0-55,0	9,36	1,44	4,83	9,41	0,89	2,19	0,40

Table 2 – Chemical composition of fine-dispersed shale taurite "TS-D"

Determined components	C	SiO ₂	CaO	MgO	Fe ₂ O ₃	Al ₂ O ₃	TiO ₂
Content of components in %	4,0-8,0	72,0-85,0	0,35	0,67	3,67	12,8	0,78
Determined components	K ₂ O	Na ₂ O	MnO	P ₂ O ₅	Co	Zn	Cu
Content %	2,0	0,25	0,014	<0,01	0,0025	0,006	0,001

Experimental part. Samples of materials based on shungite species, prepared for the experiment, were plates with a thickness of 3 mm and a size of 30*30 cm. The samples were sealed using a polymer film.

The experiment was carried out in November 2019 in the "Antenna-feeder devices" laboratory of the "Radio and mobile communications" department of Tashkent University of Information Technologies named after Mohammed Al-Khorezmi (Tashkent, Republic of Uzbekistan). An experimental setup was used, designed to study the phenomena of reflection and refraction of electromagnetic waves at the interfaces between media with different physical characteristics and reflection coefficient modules measurements as well as transmission of electromagnetic waves in the frequency range 5.3 ... 10.6 GHz.

The installation consists of a transmitting part, a receiving part, and a support on which plates based on shungite species are fixed (figure 1). The investigated shungite-based plate imitates the interface between two media.

The transmitting part of the antenna contains a UHFR generator (1) and a horn antenna (2) at a distance of 7-10 wavelengths from the horn antenna. Thus, a plane electromagnetic wave creates in a limited area of space. Falling at an angle φ onto the plate (7), depending on the material of the shungite plate and the type of polarization, the wave can:

- a) be completely reflected;
- b) partially pass through the plate and partially be reflected;
- c) completely pass through the plate.

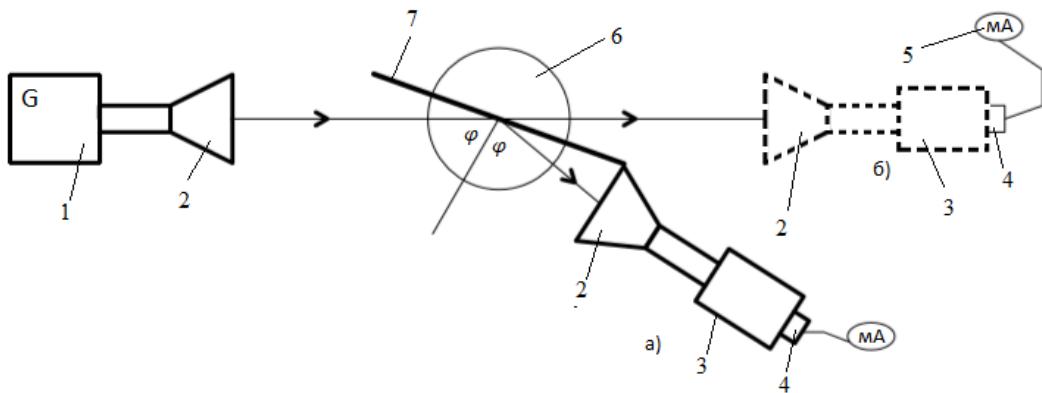


Figure 1 – Structural diagram of the measuring setup (1 - generator of UHFR range, 2 - horn antenna, 3 - variable attenuator, 4 - detector section, 5 - indicator device (microammeter), 6 - angle scale, 7 - investigated plate)

The receiving part consists of a horn antenna (2), a variable attenuator (3), a detector section (4) and a dial indicator (5). The variable attenuator is used to adjust the power supplied to the detector section from the horn antenna. The use of an attenuator allows avoiding the influence of the nonlinear characteristics of the detector on the measurement results.

The diode located in the detector section of UHFR rectifies the high frequency current. After rectification, the diode current is supplied to a DC microammeter (5). The receiving part of the installation is fixed on the platform that can move around a circle centered at point 0 (figure 1) and, consequently, can register both reflected (position a) and transmitted (position b) waves.

With direct connection of horn antennas (2) to the waveguide from the generator and the attenuator (3) in this installation, normal (relative to the plane of incidence of the wave) polarization is obtained. To obtain parallel polarization, the connection of horn antennas must be done through waveguide strands.

For experimental determination of the modules reflection coefficient and the transmission coefficient, an indirect method is applied by using a variable attenuator, graduated in decibels.

Reflection coefficient R – the ratio of the complex amplitudes of the electric field strengths of the reflected wave \bar{E}^- and the incident wave \bar{E}° , i.e.

$$R = \bar{E}^- / \bar{E}^\circ, \quad (1)$$

Transmission coefficient χ – the ratio of the complex amplitudes of the electric field strengths of the refraction of the wave \bar{E}^- and the incident wave, \bar{E}° i.e.

$$\chi = \bar{E}^- / \bar{E}^\circ, \quad (2)$$

The reflection coefficient R and the *transmission coefficient χ* are generally complex quantities. Their modules characterize the ratio of the amplitudes of the corresponding waves, and the arguments characterize the phase shift between these fields at the interface.

Changing the weakening of the attenuator, achieving consistent microammeter readings, determine the ratio of the powers of the reflected and incident waves when determining the modulus of the reflection coefficient, and the ratio of the powers of the transmitted and incident waves when determining the modulus of the transmission coefficient.

When the receiving antenna is located in the field of the incident wave, the attenuation N_1 is introduced into the receiving path by the attenuator and the microammeter reading is recorded, which is about 5 μA. Then, by placing the antenna in the field of the reflected wave, the weakening of the attenuator is reduced to a value of N_2 , at which the reading of the microammeter remains unchanged. The change in attenuation N_2-N_1 is equal to the ratio of the above powers, expressed in decibels. Since the power received by the antenna is proportional to the squares of the strengths of the corresponding electric fields, it can be written [6-7]:

$$N_2 - N_1 = 10 \lg |\bar{E}^- / \bar{E}^\circ|^2 = 20 \lg |\bar{E}^- / \bar{E}^\circ|, \quad (3)$$

where \vec{E}^o - vector of the electric field strength of the incident wave, perpendicular to the direction of propagation. \vec{E}^- - vector of reflected wave. In general case, \vec{E}^o can be located in different ways relative to the plane of incidence and can always be represented as the sum of two mutually perpendicular vectors, therefore it is sufficient to consider two cases: vector \vec{E}^o lies in the plane of incidence of the wave and wave \vec{E}^o is perpendicular to the plane of incidence of the wave.

Hence, the modulus of the reflection coefficient is [6-7]:

$$|R_{c\pi}| = 10^{(N_2 - N_1)/20} \quad (4)$$

The determination of the value of the transmission coefficient is carried out in the same way, and the modulus of the transmission coefficient is calculated by the formula

$$|\chi_{c\pi}| = 10^{(N_3 - N_1)/20} \quad (5)$$

Experiment results. The tables 3.1-3.3 show the results of an experimental study in the absence of a media interface (without a sample), and when using sample plates based on finely dispersed powdered shungite of two brands - "TK-D", "TS-D".

At an oblique incidence of a plane electromagnetic wave to the interface between two media, it is sufficient to consider only two cases - normal and parallel polarization. Set the normal polarization of the incident wave. In this case, the vector \vec{E} of the emitted wave should be perpendicular to the plane of incidence of the wave and the base of the laboratory model.

Table 3.1 – Experimental results in the absence of a sample

Incident wave polarization - normal				
Angle of wave incidence φ	Attenuation value N_1	Attenuation value N_2	Transmission coefficient	Reflection coefficient module
angle	dB	dB	–	–
20°	26,75	25,3	0,846	0,16
30°	26,75	24,8	0,799	0,3
40°	26,75	24,4	0,763	0,24
50°	26,75	22,6	0,620	0,38
60°	26,75	19,8	0,449	0,56
70°	26,75	3,8	0,171	0,929

Table 3.2 – The experimental results for a sample of a plate made of carbonate taurite "TK-D"

Incident wave polarization - normal				
Angle of wave incidence φ	Attenuation value N_1	Attenuation value N_2	Transmission coefficient	Reflection coefficient module
angle	dB	dB	–	–
20°	26,75	19	0,410	0,6
30°	26,75	17,8	0,357	0,65
40°	26,75	15,8	0,283	0,72
50°	26,75	14,2	0,236	0,77
60°	26,75	9,3	0,134	0,87
70°	26,75	4,5	0,077	0,923

Table 3.3 – The experimental results for a plate sample made of shale taurite "TS-D"

Incident wave polarization - normal				
Angle of wave incidence φ				
angle	dB	dB	–	–
20°	26,75	21	0,516	0,49
30°	26,75	19,4	0,429	0,58
40°	26,75	18	0,365	0,64
50°	26,75	14,7	0,250	0,76
60°	26,75	11,5	0,173	0,83
70°	26,75	5,3	0,085	0,92

As it can be seen from tables 3.2-3.3, the studied composites based on shungite species, namely shale taurite and carbonate taurite, can reduce the EMR level by an average of almost 2 times. Thus, a significant decrease in the coefficient for two samples of shungite has been established in comparison with the experiment "Without sample". The most effective weakening of EMR seen by the sample of carbonate taurite compared to shale taurite. But also, the sample "shale taurite" can be effectively used to quench the EMR level. The studies performed allow us to conclude that a composite material based on domestic shungite species has the ability to significantly attenuate electromagnetic waves in the UHFR range (figure 2).

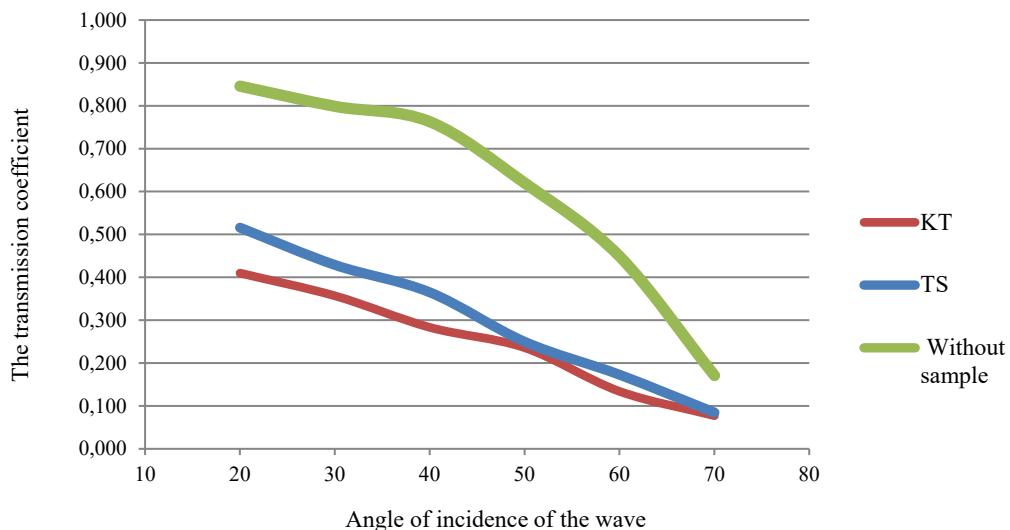


Figure 2 – Dependence of the transmission coefficient on the angle of incidence of the wave CT - carbonate taurite "TK-D"; ST - shale taurite "TS-D"

Conclusion.

1. Composites based on shungite are able to withstand EMR attenuation in UHFR range.
2. A comparative analysis of the test samples has been carried out. The maximum attenuation is provided by a sample based on "TK-D" carbonate taurite. In the entire measured range, a change in the absorption coefficient is observed depending on the angle of incidence of electromagnetic waves on the examined object. The greater the degree of incidence, the lower the wave transmission coefficient. Experimental studies have shown that the level of negative radiation / effects of electromagnetic fields (EMF) when using materials based on shungite decreases, but is not completely neutralized. However, the obtained result can be considered effective, since when using plates based on shungite species, the level of EMR is significantly reduced, which negatively affects a person.

3. Taking into account the characteristics of taurite shungite species in UHFR range and the ability of these materials, separately or as part of composites, to weaken the EMR at UHFR, it is possible to create domestic wide-range EMR absorbers with controllable characteristics (for example, by selecting the type and concentration of the filler, binder, the order of alternation of layers with different electrical conductivities, and etc.), with predetermined values of the transmission and reflection coefficients.

**Ж. С. Абдимуратов¹, Ж. Д. Манбетова¹, М. Н. Иманкул²,
К. С. Чекимбаева¹, Д. А. Давронбеков³**

¹Г.Даукеев атындағы Алматы энергетика және байланыс университеті, Алматы, Қазақстан;

²Л.Н. Гумилев атындағы Еуразия ұлттық университеті, Нұр-Сұлтан, Қазақстан;

³М. Әл-Хорезми атындағы Ташкент ақпараттық технологиялар университеті, Ташкент, Өзбекстан

ШУНГИТ ТЕГІНЕ НЕГІЗДЕЛГЕН ЭЛЕКТРОМАГНИТТІ СӘУЛЕЛЕНУ ЖҮТҚЫШТАРЫ

Аннотация. Соңғы онжылдықтарда салалар қоршаған ортаға электромагниттік энергия шығарумен тікелей немесе жанама байланысты әртүрлі технологиялардың қарқынды дамуын бастаң кешіруде. Өндірісте және күнделікті өмірде эмиссиялық техникалық құралдардың саны артып келеді. Казіргі уақытта электромагниттік сәулеленудің әсерін төмendetудің әртүрлі әдістері, әдістері мен материалдары бар.

Алматы облысы «Коксу» тау-кен компаниясының кен орындарынан алғынған табиғи отандық шунгиттекті материал негізінде құрастырылған электромагнитті сәулеленуді жүтқыш қасиеттерін қарастырамыз. ЭМӨ-нің сініргіш материалдар ұлғілерімен өзара әрекеттесу нәтижелері және өткізу коэффициенттерінің 5,3-10,6 ГГц жиілік диапазонындағы электромагниттік толқындардың (ЭМУ) құлау бұрышына тәуелділігі алынды. Жиіліктің бұл диапазонында зерттеу ете маңызды және өзекті, өйткені келесі сатыдағы мобильді ұялы байланыс жүйелері мен желілері дамып, болашакта жоғары жиіліктік диапазондарға ауысуына байланысты болады. Ұнтақты шунгитті аса жоғары жиілік диапазонында электромагнитті сәулеленудің жүтқыштары ретінде пайдалану жолдары елі толық зерттелмеген.

Басқа геоматериалдармен салыстырғанда таңдалған электромагнитті сәулелену жүтқыштарының технологиялық артықшылықтары мынадай: тас тәрізді шунгит тегінің беріктігі, жоғары тығыздық көрсеткіштері (мысалы, 2,61 г/ см³ – марка «ТС» маркасына; 2,49 г/см³ – «ТК» маркасына) және механикалық төзімділігі, жоғары термиялық және химиялық тұрақтылығы, бағасының арзан болуы, байланыстырыштармен жақсы араласуы. Зерттелетін ұлғілер жүту эффектінің болуына қарай электромагнитті сәулелену деңгейінің темендеуін қамтамасыз етеді.

Түйін сөздер: аса жоғары жиілік, электр магниттік сәулелену, электромагнитті сәулеленуді жүтқыштар, шунгит, шағылышу және ету коэффициенттері.

**Ж. С. Абдимуратов¹, Ж. Д. Манбетова¹, М. Н. Иманкул²,
К. С. Чекимбаева¹, Д. А. Давронбеков³**

¹Алматинский университет энергетики и связи им. Гумарбека Даукеева, Алматы, Казахстан;

²Евразийский национальный университет им. Л. Н.Гумилёва, Нур-Султан, Казахстан;

³Ташкентский университет информационных технологий им. М. Аль-Хоразмий, Ташкент, Узбекистан

ПОГЛОТИТЕЛИ ЭЛЕКТРОМАГНИТНОГО ИЗЛУЧЕНИЯ НА ОСНОВЕ ШУНГИТОВЫХ ПОРОД

Аннотация. В последние десятилетия отрасли промышленности переживают бурное развитие различных технологий, прямо или косвенно связанных с излучением электромагнитной энергии в окружающую среду. Увеличивается количество эмиссионных технических средств в производстве и в быту. В настоящее время существуют различные способы, методы и материалы для снижения воздействия электромагнитного излучения.

Рассмотрены свойства поглотителей электромагнитного излучения (ЭМИ), сформированных на основе отечественного природного материала шунгитовых пород месторождения горнорудной компании "Коксу" Алматинской области. Получены результаты взаимодействия ЭМИ с образцами материалов поглотителей и зависимость коэффициентов пропускания от угла падения электромагнитных волн (ЭМВ) в диапазоне частот 5,3-10,6 ГГц. Исследования в этих частотных диапазонах имеют решающее значение и актуальны при

разработке и переходе в будущем систем и мобильных сотовых сетей перспективных поколений на более высокие радиочастотные диапазоны. Применение порошкообразного шунгита для создания поглотителей ЭМИ в диапазоне сверхвысокочастотного излучения (УВЧ) до сих пор изучено недостаточно.

Технологические значения выбранных поглотителей ЭМИ по сравнению с другими геоматериалами: прочность камнеподобных пород шунгита, высокие показатели плотности (например, 2,61 г / см³ – марка “TC”; 2,49 г / см³ – марка “TK”) и механической стойкости, высокая термическая и химическая стабильность, низкая стоимость, хорошее смешивание со связующими. Исследуемые образцы обеспечивают снижение уровня ЭМИ за счет наличия эффектов поглощения.

Ключевые слова: сверхвысокая частота, электромагнитные излучения, поглотитель электромагнитных излучений, шунгит, коэффициенты отражения и прохождения.

Information about authors:

Abdimuratov Zhubanyshbay, candidate of technical sciences, associate professor, Almaty University of Energy and Communications named after Gumarbek Daukeev, Almaty, Kazakhstan; zh.abdymuratov@aues.kz; <https://orcid.org/0000-0003-3403-456X>

Manbetova Zhanat, PhD student, Almaty University of Energy and Communications named after Gumarbek Daukeev, Almaty, Kazakhstan; zmanbetova@inbox.ru; <https://orcid.org/0000-0002-6716-4646>

Imankul Manat, candidate of technical sciences, associate professor, Eurasian National University named after L.N. Gumilyov, Nur-Sultan, Kazakhstan; mimankul57@gmail.com; <https://orcid.org/0000-0002-7123-1100>

Chezhimbayeva Katipa, candidate of technical sciences, associate professor, Almaty University of Energy and Communications named after Gumarbek Daukeev, Almaty, Kazakhstan; Katipa67@yandex.ru; <https://orcid.org/0000-0002-1039-1629>

Davronbekov Dilmurod, PhD, associate professor, Tashkent University of Information Technologies named after Muhammad Al-Khwarizmi, Tashkent, Uzbekistan; d.davronbekov@tuit.uz; <https://orcid.org/0000-0003-1193-7918>

REFERENCES

- [1] Vornoli A., Falcioni L., Mandrioli D., Bua L., Belpoggi F. The contribution of in vivo mammalian studies to the knowledge of adverse effects of radiofrequency radiation on human health // International Journal of Environmental Research and Public Health. September 2019.
- [2] Krishtopova E.A., Lynkov L.M., Borbotko T.V. // Report. BGUIR. 2007. N 6. P. 3-7.
- [3] Chung D.D. // Journal of Materials Engineering and Performance. 2000. N 9 (3). P. 350-354.
- [4] Kozlovski V.V., Sofienko I.I. // Visnik ДУИКТ. 2009. 7(3). P. 233-246.
- [5] Production. <http://koksu.kz/produktsiya>
- [6] Volman V.I., Pimenov Yu.V, Technical electrodynamics. M.: Connection, 1971.
- [7] Falkovski O.I. Technical electrodynamics. M.: Connection, 1978.

**Publication Ethics and Publication Malpractice
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www:nauka-nanrk.kz

ISSN 2518-170X (Online), ISSN 2224-5278 (Print)

<http://www.geolog-technical.kz/index.php/en/>

Редакторы *M. С. Ахметова, Д. С. Аленов, А. Ахметова*
Верстка *Д. А. Абдрахимовой*

Подписано в печать 01.02.2021.
Формат 70x881/8. Бумага офсетная. Печать – ризограф.
12,75 п.л. Тираж 300. Заказ 1.