

ISSN 2518-170X (Online),  
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ  
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ

# Х А Б А Р Л А Р Ы

---

---

## ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК  
РЕСПУБЛИКИ КАЗАХСТАН

## NEWS

OF THE ACADEMY OF SCIENCES  
OF THE REPUBLIC OF KAZAKHSTAN

ГЕОЛОГИЯ ЖӘНЕ ТЕХНИКАЛЫҚ ҒЫЛЫМДАР  
СЕРИЯСЫ



СЕРИЯ  
ГЕОЛОГИИ И ТЕХНИЧЕСКИХ НАУК



SERIES  
OF GEOLOGY AND TECHNICAL SCIENCES

**4 (424)**

ШІЛДЕ – ТАМЫЗ 2017 ж.  
ИЮЛЬ – АВГУСТ 2017 г.  
JULY – AUGUST 2017

ЖУРНАЛ 1940 ЖЫЛДАН ШЫҒА БАСТАҒАН  
ЖУРНАЛ ИЗДАЕТСЯ С 1940 г.  
THE JOURNAL WAS FOUNDED IN 1940.

ЖЫЛЫНА 6 РЕТ ШЫҒАДЫ  
ВЫХОДИТ 6 РАЗ В ГОД  
PUBLISHED 6 TIMES A YEAR

АЛМАТЫ, ҚР ҰҒА  
АЛМАТЫ, НАН РК  
ALMATY, NAS RK

Б а с р е д а к т о р ы

э. ғ. д., профессор, ҚР ҰҒА академигі

**И.К. Бейсембетов**

Бас редакторының орынбасары

**Жолтаев Г.Ж.** проф., геол.-мин. ғ. докторы

Р е д а к ц и я а л қ а с ы:

**Абаканов Т.Д.** проф. (Қазақстан)  
**Абишева З.С.** проф., академик (Қазақстан)  
**Алиев Т.** проф., академик (Әзірбайжан)  
**Бакиров А.Б.** проф., (Қырғыстан)  
**Беспәев Х.А.** проф. (Қазақстан)  
**Бишимбаев В.К.** проф., академик (Қазақстан)  
**Буктуков Н.С.** проф., академик (Қазақстан)  
**Булат А.Ф.** проф., академик (Украина)  
**Ганиев И.Н.** проф., академик (Тәжікстан)  
**Грэвис Р.М.** проф. (АҚШ)  
**Ерғалиев Г.Х.** проф., академик (Қазақстан)  
**Жуков Н.М.** проф. (Қазақстан)  
**Кенжалиев Б.К.** проф. (Қазақстан)  
**Қожахметов С.М.** проф., академик (Қазақстан)  
**Конторович А.Э.** проф., академик (Ресей)  
**Курскеев А.К.** проф., академик (Қазақстан)  
**Курчавов А.М.** проф., (Ресей)  
**Медеу А.Р.** проф., академик (Қазақстан)  
**Мұхамеджанов М.А.** проф., корр.-мүшесі (Қазақстан)  
**Нигматова С.А.** проф. (Қазақстан)  
**Оздоев С.М.** проф., академик (Қазақстан)  
**Постолатий В.** проф., академик (Молдова)  
**Ракишев Б.Р.** проф., академик (Қазақстан)  
**Сейтов Н.С.** проф., корр.-мүшесі (Қазақстан)  
**Сейтмуратова Э.Ю.** проф., корр.-мүшесі (Қазақстан)  
**Степанец В.Г.** проф., (Германия)  
**Хамфери Дж.Д.** проф. (АҚШ)  
**Штейнер М.** проф. (Германия)

«ҚР ҰҒА Хабарлары. Геология мен техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде 30.04.2010 ж. берілген №10892-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,  
<http://nauka-nanrk.kz/geology-technical.kz>

---

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2017

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыра көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Г л а в н ы й р е д а к т о р  
д. э. н., профессор, академик НАН РК

**И. К. Бейсембетов**

Заместитель главного редактора

**Жолтаев Г.Ж.** проф., доктор геол.-мин. наук

Р е д а к ц и о н н а я к о л л е г и я:

**Абаканов Т.Д.** проф. (Казахстан)  
**Абишева З.С.** проф., академик (Казахстан)  
**Алиев Т.** проф., академик (Азербайджан)  
**Бакиров А.Б.** проф., (Кыргызстан)  
**Беспаяев Х.А.** проф. (Казахстан)  
**Бишимбаев В.К.** проф., академик (Казахстан)  
**Буктуков Н.С.** проф., академик (Казахстан)  
**Булат А.Ф.** проф., академик (Украина)  
**Ганиев И.Н.** проф., академик (Таджикистан)  
**Грэвис Р.М.** проф. (США)  
**Ергалиев Г.Х.** проф., академик (Казахстан)  
**Жуков Н.М.** проф. (Казахстан)  
**Кенжалиев Б.К.** проф. (Казахстан)  
**Кожаметов С.М.** проф., академик (Казахстан)  
**Конторович А.Э.** проф., академик (Россия)  
**Курскеев А.К.** проф., академик (Казахстан)  
**Курчавов А.М.** проф., (Россия)  
**Медеу А.Р.** проф., академик (Казахстан)  
**Мухамеджанов М.А.** проф., чл.-корр. (Казахстан)  
**Нигматова С.А.** проф. (Казахстан)  
**Оздоев С.М.** проф., академик (Казахстан)  
**Постолатий В.** проф., академик (Молдова)  
**Ракишев Б.Р.** проф., академик (Казахстан)  
**Сейтов Н.С.** проф., чл.-корр. (Казахстан)  
**Сейтмуратова Э.Ю.** проф., чл.-корр. (Казахстан)  
**Степанец В.Г.** проф., (Германия)  
**Хамфери Дж.Д.** проф. (США)  
**Штейнер М.** проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10892-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год

Тираж: 300 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,

<http://наука-нанрк.kz/geology-technical.kz>

---

© Национальная академия наук Республики Казахстан, 2017

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

E d i t o r i n c h i e f

doctor of Economics, professor, academician of NAS RK

**I. K. Beisembetov**

Deputy editor in chief

**Zholtayev G.Zh.** prof., dr. geol-min. sc.

E d i t o r i a l b o a r d:

**Abakanov T.D.** prof. (Kazakhstan)  
**Abisheva Z.S.** prof., academician (Kazakhstan)  
**Aliyev T.** prof., academician (Azerbaijan)  
**Bakirov A.B.** prof., (Kyrgyzstan)  
**Bespayev Kh.A.** prof. (Kazakhstan)  
**Bishimbayev V.K.** prof., academician (Kazakhstan)  
**Buktukov N.S.** prof., academician (Kazakhstan)  
**Bulat A.F.** prof., academician (Ukraine)  
**Ganiyev I.N.** prof., academician (Tadjikistan)  
**Gravis R.M.** prof. (USA)  
**Yergaliev G.Kh.** prof., academician (Kazakhstan)  
**Zhukov N.M.** prof. (Kazakhstan)  
**Kenzhaliyev B.K.** prof. (Kazakhstan)  
**Kozhakhmetov S.M.** prof., academician (Kazakhstan)  
**Kontorovich A.Ye.** prof., academician (Russia)  
**Kurskeyev A.K.** prof., academician (Kazakhstan)  
**Kurchavov A.M.** prof., (Russia)  
**Medeu A.R.** prof., academician (Kazakhstan)  
**Muhamedzhanov M.A.** prof., corr. member. (Kazakhstan)  
**Nigmatova S.A.** prof. (Kazakhstan)  
**Ozdoyev S.M.** prof., academician (Kazakhstan)  
**Postolatii V.** prof., academician (Moldova)  
**Rakishev B.R.** prof., academician (Kazakhstan)  
**Seitov N.S.** prof., corr. member. (Kazakhstan)  
**Seitmuratova Ye.U.** prof., corr. member. (Kazakhstan)  
**Stepanets V.G.** prof., (Germany)  
**Humphery G.D.** prof. (USA)  
**Steiner M.** prof. (Germany)

**News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 10892-Ж, issued 30.04.2010

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,  
<http://nauka-nanrk.kz/geology-technical.kz>

---

© National Academy of Sciences of the Republic of Kazakhstan, 2017

Editorial address: Institute of Geological Sciences named after K.I. Satpayev  
69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

**NEWS**

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

**SERIES OF GEOLOGY AND TECHNICAL SCIENCES**

ISSN 2224-5278

Volume 4, Number 424 (2017), 123 – 132

UDC 622.25.89

**M. T. Biletsky, B. T. Ratov, A. R. Bayboz**

Kazakh national research technical university named after K. I. Satpayev, Almaty, Kazakhstan.

E-mail: ratov.bt@gmail.com

**THEORETICAL JUSTIFICATION OF AN AUTOMATIC DEVICE  
FOR DRILLING MUD FUNNEL VISCOSITY MEASUREMENT**

**Abstract.** It is considered an installation for automatic measuring drilling mud funnel viscosity (a patent of the Republic of Kazakhstan), involving a rotating table, carrying a funnel with a nipple at the end. At each rotary movement the funnel passes through four positions: filling up with the measured liquid, measuring its funnel viscosity, washing up and removing the traces of the liquid, evacuation of remaining water out of the funnel. Stopping the table for carrying the measurement through and starting the time counter is affected by means of a located on the table cam, opening a live electrical contact at the moment of the funnel running clean from under the liquid delivering pipe. At completion of draining the liquid's measured volume, a float inside the funnel, while sinking, stops the time counter and restarts the table's rotation. The movement of the table is controlled by time relay and starting relay. The electrical signal of funnel viscosity is converted into digital form and conveyed to a control panel of the drilling operator. Computer program representing a model of the funnel viscosity measurement process is worked out. The funnel viscosity of a liquid is found as a sum of draining times of volumes of virtual cylinders, formed as a result of dividing the liquid's measured volume height into a certain number of equal parts, the virtual cylinder's diameter being taken as equal to the average diameter of the corresponding truncated cone. For each virtual cylinder the related to the height of its position in the funnel hydrostatic pressure is represented as an equation, involving a sum of two pressure drops: the first one, resulting from the flow contraction while moving down the funnel; the second one, required for the flow's passage along the nipple. On the second occasion, the accurate value of the hydraulic resistance factor being unknown, it was determined by method of iteration, providing a stepwise approximation to it. For each virtual cylinder the above mentioned equation made it possible to determine the liquid's flow rate, and by it – the velocity of its passing along the nipple and the velocity and the time of its level dropping in the funnel. The sum of those times represents the liquid's funnel viscosity. The model's adequacy was successfully corroborated by way of calculating the water index (15 s) of the standard flow meter ВБР-2, basing on its geometrical dimensions. The model was used for working out optimum values of the most important structural parameters of the installation for automatic measurement of drilling mud funnel viscosity, including dimensions of the funnel – considerably reduced as compared to the standard funnels, but with preservation or even raising the accuracy of measurements. It also helped to find the minimum possible interval between the successive measurements, basing on establishing the required time of each of the principal operations, performed at one full revolution of the table.

**Keywords:** drilling wells technology, drilling muds' funnel viscosity measuring instruments, automatic measurements, theoretic justification, computational mathematics, programming.

**Introduction.** Employees of the Drilling Technology and Machinery department have worked out a concept of drilling mud [1,2] parameters measurement automatization, basing on use of a rotating table [4]. As applied to the funnel viscosity, the automatic installation [3,5] is presented at the figure 1.

Driven by the synchronous motor 2, the rotating table 1 and the funnel 3 perform one measurement at each revolution. To do that, the rotation is interrupted and a halt made. A second halt is made for washing up the device. Intermittent nature of the table's motion is effected by a group of relays 9 (time relay and starting relay). The same as at the traditional appliance, the measurement is based on the time of draining an appointed volume of liquid 4 out of the funnel 3 with a nipple 8. Before the measurement the funnel is passing under the liquid supplying channel 13 and filled up with it to overflow. The "measurement"

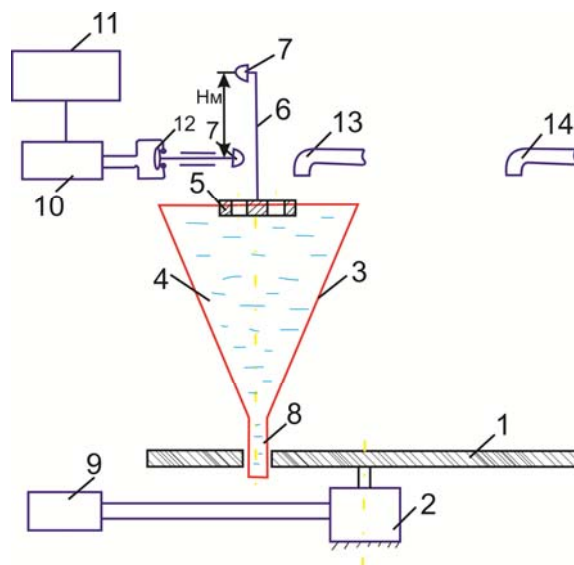


Figure 1 – An installation for the funnel viscosity automatic measurement

position corresponds to the moment, of the funnel getting clean from under the pipe 13, when the incoming flow stops and remains only the outgoing one. At that moment a cam on the rotating table acts upon the relay, which cuts the power supply of the electromotor, and at the same time starts a time counter. During the measurement, together with sinking level of the liquid, sinks the installed in the funnel float 5. At the moment, when the appointed volume  $V_M$  of the liquid has left the funnel, the linked with the float by the stem 6 cam 7 breaks the contact 12 and by doing that stops the time counter and resumes rotation of the table. The signal of the funnel viscosity is supplied to analog-to-digital converter 10 and after processing, appears on the display 11 in seconds. In a similar manner is the table's halt effected, when the funnel comes to the channel 14, supplying water in the "cleaning" position. The only difference consists in the fact, that the time of that second halt is a constant one.

For the purpose of obtaining maximal technological and economic effect from the above described device, theoretical and experimental research has been carried out. The liquid outflow time dependency on the funnel's geometry has been examined. Drilling muds have wide interval of funnel viscosities [1,2]– from 16 up to 100 s and more. For reference viscosity, the viscosity of distilled water at the temperature  $20 \pm 5^0 C$  has been taken. It is constant for any given funnel and for the standard measuring funnels equals 15 s – it is named the "water index". The "water index" characterizes applicability of the funnel for viscosity measuring. The task of the presented research involved studying influence of a funnel geometry on its water index

In the process of liquid draining out of a funnel, under the hydrostatic pressure  $p$  of its column, two kinds of resistance are overcome with two corresponding pressure drops [6,7]:

$$p = \Delta_{p1} + \Delta_{p2} , \quad (1)$$

where  $\Delta_{p1}$  – is the pressure drop on the flow, traveling through the funnel's nipple;  $\Delta_{p2}$  – the pressure drop, caused by flow's contraction, while moving along the narrowing funnel.

$$\Delta_{p1} = \lambda \rho L \frac{8Q^2}{\pi^2 d^5} , \quad (2)$$

where  $Q$  – is the flow rate;  $\rho$  – the liquid's density ( $1000 \text{ kg/M}^3$  for water);  $\lambda$  – the hydraulic resistance factor, depending on the Reynolds criterion and the channel walls asperity;  $d$  – the pipe inner diameter;  $L$  – its length.

An important circumstance in this context is the fact, that pressure drop  $\Delta_{p1}$  is inversely proportional to the fifth degree of  $d$ , and that diameter of the nipple 8 is very small as compared to the diameters of

the funnel itself. Therefore at the further consideration the part of  $\Delta_{P1}$ , related to the funnel, has been neglected; and only that of the nipple taken into account.

$$\Delta_{P2} = \rho \frac{8Q^2}{\pi^2 d^4 a^2}, \quad (3)$$

where  $a$  is the factor of resistance to the flow contraction, which according to V. Simonov [7] in case of a tapered junction to the nozzle is varying from 0.95 to 0.99. So the funnel was considered as a tapered junction to the nipple.

The hydrostatic pressure of a column with the height  $H$  equals

$$p = 9.81\rho H, \quad (4)$$

Using formulae (2), (3) and (4); the equation (1) can be converted to

$$9.81\rho H = \lambda\rho L \frac{8Q^2}{\pi^2 d^5} + \rho \frac{8Q^2}{\pi^2 d^4 a^2} \quad (5)$$

From that the flow rate  $Q$  can be found:

$$Q = \sqrt{\frac{9.81H\pi^2}{8\left(\frac{\lambda L}{d^5} + \frac{1}{a^2 d^4}\right)}} \quad (6)$$

In the process of funnel viscosity measurement, the column height  $H$  is continuously decreasing, which affects  $Q$ . The same is true with relation to the measured volume  $V_M$  of draining liquid, depending both on  $H$  and on the continuously narrowing diameter of the funnel.

The problem was solved by means of computational mathematics methods [8]. A program was compiled, whose algorithm is basing on parameters and considerations as follows:

– The initial volume of the liquid in the conic funnel:

$$V = F * H / 3, \quad (7)$$

where  $F$  – is the area of the cone's base:

$$F = \pi D^2 / 4, \quad (8)$$

where  $D$  – is diameter of the base

– The volume ratio (relative value of the measured volume):

$$K_V = V_M / V, \quad (9)$$

– The geometrical similarity principle stipulates, that the linear dimensions of similar figures are related as cubic roots of their volumes. Conic shape of the liquid, filling the funnel, is similar to that, which remains there after the measured volume has drained out. Relative value of the remaining volume:

$$K_R = 1 - K_V, \quad (10)$$

In view of the aforesaid the drop of the liquid's level  $H_M$  in the process of measurement (see figures 1 and 2):

$$H_M = H - H\sqrt[3]{K_R}, \quad (11)$$

–  $H_M$  (see the figure 2) was divided by virtual horizontal planes into  $n$  equal sections. Thus, liquid in the funnel was divided into  $n$  conic elements numbered  $i$ , beginning with the uppermost element, numbered  $i = 0$ . The height of each element ("the step"):

$$S = H_M / n \quad (12)$$

– Hereafter each conic element was considered as a cylindrical one, whose diameter equals mean (as related to the element's height  $S$ ) diameter of the cross section of corresponding conic element:

$$D(i) = D(1 - S/(2H) - i * S / H), \quad (13)$$

The cross section area:

$$F(i) = \pi D(i)^2 / 4, \quad (14)$$

The volume of the virtual cylindrical element:

$$V(i) = F(i) * S \quad (15)$$

– It was assumed, that volumes of the cylindrical elements and corresponding conic elements are equal. Obviously the approximation error is decreasing with the quantity  $n$  of the elements.

– For each element the corresponding height of liquid column

$$H(i) = H - S/2 - S * i, \quad (16)$$

– The flow rate  $Q(i)$  in the process of draining each liquid element is found by the formula (6)

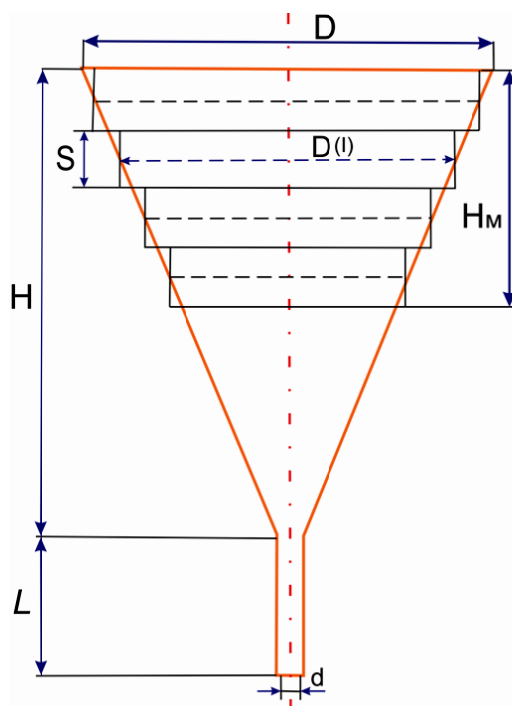


Figure 2 – Division of the funnel's measuring volume  $V_M$  into  $n$  virtual cylinders

– The corresponding speed of the liquid's level dropping:

$$g_H(i) = 4Q(i) / (\pi D^2(i)) \quad (17)$$

– The corresponding time of level dropping within the limits of the element:

$$T(i) = S / g_{H(i)} \quad (18)$$

– The funnel viscosity of the liquid is the result of the summing up the values, related to all of the  $n$  elements

$$T = \sum_n T(i) \quad (19)$$

– Initially factor  $\lambda$  in formula (2) was chosen, basing on general considerations. However in the program it is amended by iteration method. For that purpose, for each element the velocity of the liquid traveling through the nipple  $\delta$  was found:

$$g(i) = 4Q(i) / (\pi d^2) \quad (20)$$

The corresponding Reynolds criterion:

$$Re(i) = g(i) \rho d / \nu, \quad (21)$$

where  $\nu$  – is dynamic viscosity of the liquid

The amended value  $\lambda_C$  of hydraulic resistance factor was found by the formula of F. Shevelev [7], relating to water, passing through smooth pipes with  $Re < 10^6$ :

$$\lambda_C = 0.25 / Re^{0.226} \quad (22)$$



In a program loop the amended value of  $\lambda_c$  was put into formula (6) instead of a preceding one. At each cycle of the loop difference between their values becomes smaller and the loop ends, when it becomes negligibly small.

For verification of the algorithm and the program, calculation of water index of the standard funnel viscosity meter ББП-2 [2] was performed

Table 1 – Description of the funnel of the ББП-2 viscosimeter

#	Name	Value.	#	Name	Value.
1	Height $H$ , m	0.232	7	Measured volume $V_M$ , m <sup>3</sup>	0.0005
2	Level drop $H_M$ , m	0.079	8	Volume ratio $K_V$	0.714
3	Top diameter $D$ , m	0.106	9	Hydraulic resistance factor $\lambda$	0.021
4	Nipple length $L$ , m	0.100	10	Flow contraction factor $a$	0.99
5	Nipple diameter $d$ , m	0.005	11	Virtual cylinders* number $n$	6**
6	General volume $V$ , m <sup>3</sup>	0.0007	12	Cylinder height, m	0.013

\* According to fig. 2.  
 \*\* When the quantity  $n$  of the virtual cylinders in the program was brought up from 6 to 50, the final result did not change. So from precision standpoint the  $n = 6$  is satisfactory.

The data of table 1 were entered into the program, and the sum of level dropping times for all the 6 cylinders (formula 19) was found equal 15 s, – the same as in the ББП-2 certificate

As compared to the traditional manual measurement the automatic measurement device involves a number of additional elements, increasing its size, mass, and cost. So the possibility of their reduction was examined

Precision of measurement is expressed by its relative error [9-17]

$$\delta = \Delta / A, \quad (23)$$

where  $\Delta$  – is an absolute error, and  $A$  – measured value.

On the occasion under consideration  $A$  is the water index, which traditionally equals 15 s. At manual measurement the absolute error  $\Delta$  is basically connected with subjective factors, such as timeliness of starting and stopping the stop watch, overfilling or underfilling the measuring cylinder, correctness of choosing the mud withdrawing place etc. In an automatic device all subjective errors are ruled out, which sharply reduces both  $\Delta$  and  $\delta$ . It follows from the formula (23), that the same precision can be achieved for smaller  $A$  if is reduced proportionally to reduction of  $\Delta$ . So, eliminating subjective errors, makes it possible to reduce the water index of the funnel and consequently the funnel's dimensions, as well as dimensions of the whole automatic installation.

In table 2 descriptions of a funnel, with water index 10 s are given

Table 2 – Parameters of a funnel with water index 10

$H$ , m	$H_M$ , m	$D$ , m	$L$ , m	$d$ , m	$V$ , m <sup>3</sup>	$V_M$ , m <sup>3</sup>	$K_V$	$\lambda$	$a$	$T$ , s
0.1	0.034	0.106	0.04	0.005	0.00029	0.0002	0.714	0.021	0.96	10.0
43*	43	100	40	100	41	41	100	110	98	67

\* Per cent of the corresponding data in table 1.

The table demonstrates essential reduction in dimensions of the funnel, as compared to those of ББП-2. However the internal diameter  $d$  of the nipple and the volume ratio  $\lambda$  are left intact.

It should be observed, that while using this funnel, it does not present a problem for the results of measurements to be demonstrated on the display with coefficient 1.5 – that is according to the conventional scale of funnel viscosity measurement.

Table 3 – Modification of water flow parameters, while performing measurement by the funnel with water index 10 s (6 virtual cylinders)

I	H(i), cm	D(i), cm	F(i), cm <sup>2</sup>	V(i), cm <sup>3</sup>	P(i), Па	Q(i), cm <sup>3</sup> /МИН	$\mathcal{G}(i)$ m/s	$\mathcal{G}_H(i)$ , m/s	T(i), s	Re(i)	$\lambda_C(i)$
0	9.7	10.3	83.3	47,3	953	1350	1.15	0.0027	2.10	57000	0.021
1	9.1	9.6	73.9	42,0	897	1310	1.12	0.0030	1.92	55300	0.021
2	8.6	9.0	65.1	36,9	841	1270	1.08	0.0033	1.74	53600	0.021
3	8.0	8.4	56.8	32,2	785	1220	1.04	0.0036	1.57	51800	0.021
4	7.4	7,8	49.1	27,8	730	1180	1.00	0.0040	1.41	50000	0.022
5	6.9	7.2	42.0	23,3	674	1130	0.97	0.0045	1.26	48000	0.022

The table illustrates performance of the algorithm, used for finding a funnel’s water index:

– In the course of the measurement the height  $H(i)$  of water column decreases from virtual cylinder number  $i$  to that of number  $i+1$  according to formula (16) by the step  $S$  – formula (12). Proportionally to  $H(i)$  decreases cylinder’s diameter  $D(i)$  – formula (13) and hydrostatic pressure  $p(i)$ – formula (4). Cross section areas of the cylinders – formula (14), and their volumes– formula (15) are decreasing proportionally to  $H(i)^2$

– The flow rate  $Q(i)$  – formula (6), and the velocity  $\mathcal{G}(i)$  of the flow in the nipple – formula (20), are decreasing in proportion to  $\sqrt{H(i)}$

– The speed  $\mathcal{G}_H(i)$  of water level dropping is found by formula (17), which is similar to formula (20). However if in formula (20) the diameter  $d$  of the nipple is constant, while in formula (17) decreasing are both: denominator  $D(i)$  and numerator  $Q(i)$ . As the rate of denominator decreasing is smaller, than that of numerator, the value of  $\mathcal{G}_H(i)$  (contrary to  $\mathcal{G}(i)$ ) is growing.

– After  $\mathcal{G}_H(i)$  is found, the time  $T(i)$ , of the level dropping within the limits of each cylinder is determined by formula (18).

– The water index  $T$  is found by summing up the  $T(i)$  – formula (19),

– The Reynolds criterion  $R(i)$  formula (21), related to the traveling through the nipple of the funnel water flow, is decreasing in proportion to  $\mathcal{G}(i)$ , but that did not substantially affect the values of corrected hydraulic resistance factors  $\lambda_C(i)$  – formula (22)

Basing on data of tables 2 and 3, the optimal parameters of the rotating table were determined:  
Its radius

$$R \geq 2R_F, \tag{24}$$

where  $R_F$  – is the outer radius of the funnel top

The time of the table’s revolution consists of 5 components (see the fig.3):

$$T_R = T_{HM} + T_{CL} + T_{HCL} + T_{DR} + T_{FL}, \tag{25}$$

where  $T_{HM}$  – is the time of halt for performing measurement;  $T_{CL}$  – the time of cleaning the funnel, while the table is moving;  $T_{HCL}$  – the time of the special halt for cleaning;  $T_{DR}$  – the time for draining cleaning water out of the funnel;  $T_{FL}$  – the time for filling the funnel with measured mud

$T_{HM}$  conventionally varies from water index 15 s to 100 s (the scale of ББР-2 viscosimeter). For the considered funnel it corresponds to actual interval from 10 to 70 s;

$T_{CL} + T_{HCL}$  must guarantee elimination of measured mud traces in the funnel and its nipple. Meeting that requirement depends mostly on the cleaning water stream intensity. As for time, it is reasonable to make it equal to funnel viscosity of muds of high but not extremely high thickness With relation to the conventional funnels it can be taken for 60 s, ergo for the funnel under consideration it makes 40 s

$T_{DR}$  is time, needed for full evacuation of the cleaning water out of the funnel – after the cleaning has terminated but before the filling with mud has started. The program for determining the funnel's water index makes it possible to find precise value of that time too. For that  $K_v=1$  is entered in the program (formulae (9), (10), (11))

$T_{FL}$  depends on diameter of the mud delivering pipe.

The minimal table's rotation period (with deduction of the time of its halts for measurement and cleaning) was found, basing on  $T_{DR}$  time and the diagram on the figure 3.

The table 1 is turning clockwise (see the arrow on the top). The diagram demonstrates mud 3 and water 4 delivery pipes positions with relation to the rotating table and the funnel 2. At the diagram the funnel is situated at the position  $HM$  - that of measuring halt. In that position the funnel has just left the interval  $FL$ . Directly, after the measurement is terminated and the table's motion resumed, it will enter the cleaning interval  $CL$ . In the middle of that interval the table makes a special halt for cleaning. After resumption of rotation, the funnel passes the second half of the cleaning interval  $CL$ , draining  $DR$  and filling  $FL$  intervals, and finally accomplishes the revolution making a halt for performing a next in turn measurement.

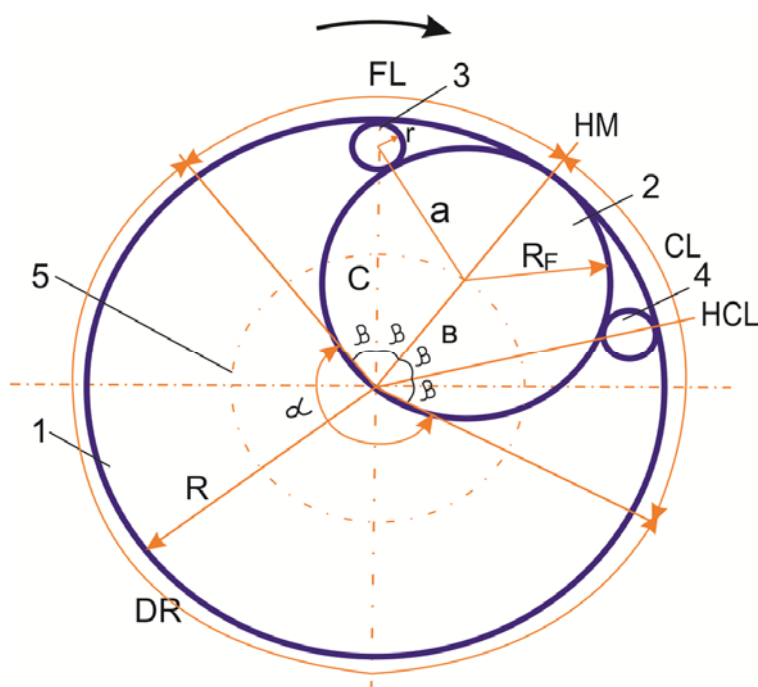


Figure 3 – Positions of the funnel on the rotating table

The table's rotation period (disregarding the halts)

$$T_{RP} = \frac{T_{Dr}}{\alpha} 360, \quad (26)$$

where  $\alpha$  is the angle corresponding to  $DR$  interval on the fig 3

As it follows from the diagram, that angle

$$\alpha = 360 - 4\beta, \quad (27)$$

where angle  $\beta$  is found by considering the  $abc$  triangle on the figure. All the legs of the triangle are found directly from the diagram

$$a = R_F + r, \quad (28)$$

where  $r$  is radius of the mud and water delivery pipe (both pipes are alike).

$$b = R_F \quad (29)$$

$$c = 2R_F - r, \tag{30}$$

Hence according to geometrical rules

$$\beta = \arccos\left(\frac{c^2 + b^2 - a^2}{2cb}\right) \tag{31}$$

The maximal rotation frequency (rpm)

$$m = 60 / T_{RP} \tag{32}$$

Now to find the full time of the table's revolution the formula (25) can be written as

$$T_R = T_{RP} + T_{HM} + T_{HCL}, \tag{33}$$

Funnel mud filling (as well as cleaning while moving  $T_{CL}$ ) time

$$T_{FL} = \frac{T_{DR}}{360} 2\beta \tag{34}$$

Table 4 – Descriptions of the rotating table for the funnel with water index 10 s

#	Name	Value	Formula
1	Funnel's top outer diameter $D_F$ , m	0.108	
2	Funnel's top outer radius $R_F$ , m,	0.054	
3	Table's diameter $D_T$ , m	0.216	24
4	Outer radius of mud and water delivery pipes $r$ , m	0.010	
5	Measurement time $T_M$ , s, from – to	10 – 70	
6	Cleaning time $(T_{CL} + T_{HCL})$ , s	40	
7	Water draining time after cleaning $T_{DW}$ , s	16	6,9,17,18,19
8	Mud filling time, $T_{FM}$ , s	3	34
9	Angle $\beta$ between vertical symmetry axis and $HM$	$37^0$	28,29,30,31
10	Angle $\alpha$ of $DR$ interval	$212^0$	27
11	Table rotation period (regardless the halts), $T_{RP}$ , s	27	26
12	Table's rotation frequency $m$ , rpm	2.2	32
13	Actual table's revolution time $T_R$ , s : from – to	74 – 134	25

**Conclusion.** At the drilling technology department of Satpajev Technology Research University a method of drilling mud parameters measurement automatization, basing on application of a rotating table has been proposed; worked out principal details of the installation for automatic measuring the drilling mud funnel viscosity; according to the laws of hydraulics, and by means of the computation mathematics, a computer model of the funnel viscosity measuring process has been created; successfully performed verification of the model's adequacy, by calculating the water index of a standard instrument for measurement funnel viscosity, basing on its geometrical dimensions; basing on the worked out computer model, for the purpose of reducing dimensions and costs of the installation for drilling muds funnel viscosity automatic measurement, optimal values of its principal parameters are established.

#### REFERENCES

- [1] Georg R.Gray, H.C.H. Darly. Composition and properties of oil well drilling fluids. Gulf publishing company// Huston, London, Paris, Tokyo, Moscow 1985
- [2] A drilling contractor's reference book. Moscow: "Infra ingeneria" 2006
- [3] Biletskiy M., Kasenov A, Sushko & Begun A. The Kazakhstan Republic's Patent E21B 45/00 # 25680 of 16.06.2014
- [4] Biletskiy M., Ratov B, Kasenov A. Method of automatic measurements of drilling mud quality parameters: Int. J.Chem.Sci.:11(4), 2013, 1705– 7012 ISSN 0972–768X . www.sadgurpublications.com
- [5] Biletskiy M, Darmenov E. Automatization of drilling muds parameters control: Collected works of the conference "Geo-logy and oil & gas in XXI sentuty". Almaty 2016

- [6] Rabinovich. E. Hydraulics: Moscow "Nedra" 1980
- [7] Mittelman B. Reference book on hydraulic calculations in drilling: Moscow, Gostoptekhizdat 1963
- [8] Guter R. Ovchinsky. B. Elements of digital analysis: Moscow "Nauka" 1970
- [9] Vasiljev A. Foundations of metrology and technological measurements: Moscow "Mashinostroeniye" 1988
- [10] Biletskiy M. Measuring equipment in drilling: Almaty KazNTU 2013
- [11] Kassenov A.K., Ratov B.T., Moldabekov M.S., Faizulin A.Z. & Bukenova M.S. (2016) The reasons of formation of oil seals when drilling geotechnological wells for underground leaching of uranium ores // 16<sup>th</sup> International Multidisciplinary Scientific GeoConference, Albena, Bulgaria, 2016, ISBN 978-619-7105-55-1 / ISSN 1314-2704, Book 1 Vol.1,633–639pp.
- [12] Ratov B.T., Igembayev I.B., Omirzakova E.Zh. & Zhanabayev T.A. (2016) New generation of polymer drilling fluids with low content of clay for drilling of wells in difficult conditions // 16<sup>th</sup> International Multidisciplinary Scientific GeoConference, Albena, Bulgaria, 2016, ISBN 978-619-7105-57-5 / ISSN 1314–2704, Book 1 Vol. III, 865–874 pp.
- [13] Biletski M. T., Ratov B. T., Kasenov A. K. & Ibyldaev M. H. (2015) Caving control while drilling through highly dispersible clays at uranium deposits of Kazakhstan // 15<sup>th</sup> International Multidisciplinary Scientific GeoConference, Albena, Bulgaria, 2015, Vol. 2, pp. 157–164 DOI: 10.5593 / B12 / S2.021. ISBN 978–619–7105–32–2 / ISSN 1314–2704, Book1 Vol.2, 157–164pp.
- [14] Kassenov A. K., Biletskiy M. T., Ratov B.T. & Korotchenko T.V. (2015) Problem analysis of geotechnical well drilling in complex environment // IOP Conf. Series: Earth and Environmental Science 24 012026 DOI: 10.1088 / 1755–1315 / 24/1 / 012,026.
- [15] Kozhevnykov A. A., Ratov B. T., & Filimonenko N. T. (2014) Classification of fluids fed by displacement pumps // Int. J. Chem. Sci. : 12 (4), 1161–1168, ISSN 0972 – 768X
- [16] Shipulin A.V., Nifontov Y.A., Ratov B.T., Fedorov B.V. & Zhanabayev T.A. (2014) To the issue of searching an alternative heating method for bottom hole zone of the oil formation // Life Sci J; 11 (10s): 457–460] (ISSN 1097–8135).
- [17] Biletski M. T., Ratov B. T., Kassenov A. K. & Sushko S. M. (2013) Method of automatic measurements of drilling mud quality parameters // Int. J. Chem. Sci.: 11 (4), 1705–1712 (ISSN 0972–768X).

**М. Т. Билецкий, Б. Т. Ратов, А. Р. Байбоз**

Қ. И. Сәтбаев атындағы Қазақ ұлттық техникалық зерттеу университеті, Алматы, Қазақстан

### **БҰРҒЫЛАУ ЕРІТІНДІСІНІҢ ТҮТҚЫРЛЫҒЫНЫҢ ШАРТТЫ ЖАҒДАЙДА АВТОМАТТЫ ТҮРДЕ ӨЛШЕУДІҢ ҒЫЛЫМИ ДӘЛЕЛДЕНУІ**

**Аннотация.** Айналымалы үстелге орнатылған түтікшесі бар құйғыш арқылы бұрғы ерітіндісінің шартты тұтқырлығы өлшенетін автоматты қондырғы қарастырылады (Қазақстан Республикасының патенті). Әр бір айналыста құйғыш төрт жақты өтеді: толтырылған өлшенетін ерітіндімен, оның тұтқырлығын өлшеу, ерітіндінің қалдықтарын жою, құйғышқа толтырылған суды жою. Өлшеуді жүргізу үшін үстелді кою және уақыт өлшегішті қосу құйғыштың ерітінді келетін түтікшеден шыққан кезде үстелде орналасқан тетікті әрекетке келтіру нәтижесінде қалыпты тұйық байланыстырғыш арқылы орындалады. Ерітіндінің өлшенетін көлемі аяқталғанда, құйғыштағы қалқыма төмен түседі уақыт есептегішті өшіреді және үстел айналымын жаңадан орындайды. Үстел қозғалысын уақыт релесі және қосқыш реле басқарады. Электірлік өлшегіш сигналдар сандық түрге ауысады және бұрғышының табло пультына жіберіледі. Құйғыш құрал көмегімен шартты тұтқырлықты өлшеу процессінің математикалық моделі жасалған, компьютерлік бағдарлама құрастырылған. Сұйықтықтың шартты тұтқырлығы виртуалдық цилиндрдің ағу уақытының жиынтығымен анықталады. Анықталған теңдей бөлшектердің саны сұйықтықтың өлшенетін көлемінің қысымы арқылы пайда болған, виртуалдық цилиндрдің диаметрі кесілген конустың сәйкестендірілген ораша диаметріне тең. Әрбір виртуалды цилиндрдің оның гидростатикалық қысымының сәйкес биіктігі сұйықтықтың қысымын екі рет жоғалтқан теңдік түрінде көрсетілген: біріншіден құйғыш бойымен қозғалыс кезіндегі оның қысылған ағымның нәтижесінде және екіншіден оның ұшындағы түтікше арқылы өтуінде. Ең соңғы жағдайда гидравликалық кедергінің нақты коэффициенті оның шынайы белгісін қамтамасыз ететін инерция әдісімен анықталады. Әрбір виртуалды цилиндрге алынған басқару сұйықтықтың шығымын және сонымен бірге оның ұшы бойынша жылдамдығын, құйғыштағы деңгейінің түсуін және түсу уақытын анықтауға мүмкіндік береді. Бұл уақыттардың жиынтығы сұйықтықтың шартты тұтқырлығын береді. Үлгінің дұрыстығы ВБР-2 шығын өлшегішінің геометриялық өлшемдер негізінде жасалған құйғыштың су санын (15 с) өлшеу арқылы дәлелденген. Үлгі бұрғы ерітінділерінің шартты тұтқырлығын автоматты түрде өлшейтін қондырғының оңтайлы конструктивті параметрлерін жасауға қолданған, өлшейтін құйғыштың өлшемін оның өлшеу дәлдігін сақтап қалу арқылы кішірейту қарастырылған, сонымен бірге үстелдің толық бір айналымы кезінде өлшемдердің минималды мүмкіндігі қарастырылған.

**Түйін сөздер:** ұңғыны бұрғылау технологиясы, бұрғы ерітінділердің шартты тұтқырлығы, өлшеу құралдары, өлшеуді автоматтандыру, теориялық негіздеу, сандық математика, бағдарламалау.

М. Т. Билецкий, Б. Т. Ратов, А. Р. Байбоз

Казахский национальный исследовательский технический университет им. К. И. Сатпаева,  
Алматы, Казахстан

### НАУЧНОЕ ОБОСНОВАНИЕ РАБОТЫ АВТОМАТИЧЕСКОГО ИЗМЕРИТЕЛЯ УСЛОВНОЙ ВЯЗКОСТИ БУРОВОГО РАСТВОРА

**Аннотация.** Рассматривается устройство для автоматического измерения условной вязкости бурового раствора (патент Республики Казахстан), включающее поворотный стол с установленной на нем воронкой с трубчатым наконечником. При каждом повороте воронка проходит четыре положения: наполнение измеряемым раствором, измерение его вязкости, промывка с удалением следов раствора, удаление заполняющей воронку воды. Остановка стола для производства измерения и запуск счетчика времени происходит под воздействием на нормально замкнутый контакт расположенного на столе кулачка в момент выхода воронки из под подающей раствор трубки. При завершении истечения мерного объема раствора, находящийся в воронке поплавков, опускаясь, отключает счетчик времени и возобновляет вращение стола. Движением стола управляют реле времени и пусковые реле. Электрический измерительный сигнал преобразуется в цифровую форму и подается на табло пульта буровика. Составлена компьютерная программа, представляющая собой математическую модель процесса измерения условной вязкости с помощью мерной воронки. Условная вязкость жидкости определяется как сумма времен вытекания объемов виртуальных цилиндров, образованных в результате деления высоты мерного объема жидкости на определенное число равных частей, причем диаметр виртуальных цилиндров принимается равным среднему диаметру соответствующего усеченного конуса. Для каждого виртуального цилиндра соответствующее высоте его положения гидростатическое давление представлено в виде уравнения, как сумма двух потерь давления жидкости: во-первых, в результате сжатия ее потока при движении вниз по воронке и, во-вторых, при ее прохождении через трубчатый наконечник. В последнем случае точное значение коэффициента гидравлических сопротивлений определяется методом итераций, обеспечивающим последовательное приближение к его истинному значению. Для каждого виртуального цилиндра упомянутое уравнение позволило определить расход жидкости, и по нему – скорость ее движения по наконечнику, скорость опускания ее уровня в воронке и время опускания. Сумма этих времен и дает условную вязкость жидкости. Адекватность модели подтверждена путем вычисления водного числа (15 с) воронки серийно выпускаемого расходомера ВБР-2 на основании ее геометрических размеров. Модель использована для разработки оптимальных значений важнейших конструктивных параметров установки для автоматического измерения условной вязкости бурового раствора, включая размеры мерной воронки – существенно уменьшенные, по сравнению с серийно выпускаемыми воронками, при сохранении и увеличении точности измерений, – а также минимально возможный интервал между последовательными измерениями – на основе установления необходимого времени каждой из основных операций, осуществляемых при одном полном обороте стола.

**Ключевые слова:** технология бурения скважин, условная вязкость буровых растворов, измерительные средства, автоматизация измерений, теоретическое обоснование, вычислительная математика, программирование.

---

**Publication Ethics and Publication Malpractice  
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct ([http://publicationethics.org/files/u2/New\\_Code.pdf](http://publicationethics.org/files/u2/New_Code.pdf)). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

[www.nauka-nanrk.kz](http://www.nauka-nanrk.kz)

**ISSN 2518-170X (Online), ISSN 2224-5278 (Print)**

<http://geolog-technical.kz/index.php/kz/>

Верстка Д. Н. Калкабековой

Подписано в печать 11.07.2017.

Формат 70x881/8. Бумага офсетная. Печать – ризограф.

18,2 п.л. Тираж 300. Заказ 4.