

**ISSN 2518-170X (Online),
ISSN 2224-5278 (Print)**

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ФЫЛЫМ АКАДЕМИЯСЫНЫҢ
Satbayev University

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН
Satbayev University

NEWS

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN
Satbayev University

**SERIES
OF GEOLOGY AND TECHNICAL SCIENCES**

2 (440)

MARCH – APRIL 2020

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруды. Web of Science зерттеушілер, авторлар, баспашилар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енүі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контенттеге адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.

Бас редакторы
э. ф. д., профессор, КР ҮГА академигі
И.К. Бейсембетов
Бас редакторының орынбасары
Жолтаев Г.Ж. проф., геол.-мин. ф. докторы
Редакция ақысы:

Абаканов Т.Д. проф. (Қазақстан)
Абишева З.С. проф., академик (Қазақстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Әзірбайжан)
Бакиров А.Б. проф., (Қыргызстан)
Беспаев Х.А. проф. (Қазақстан)
Бишимбаев В.К. проф., академик (Қазақстан)
Буктуков Н.С. проф., академик (Қазақстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Тәжікстан)
Грэвис Р.М. проф. (АҚШ)
Ерғалиев Г.К. проф., академик (Қазақстан)
Жуков Н.М. проф. (Қазақстан)
Қожахметов С.М. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Ресей)
Курскеев А.К. проф., академик (Қазақстан)
Курчавов А.М. проф., (Ресей)
Медеу А.Р. проф., академик (Қазақстан)
Мұхамеджанов М.А. проф., корр.-мүшесі (Қазақстан)
Нигматова С.А. проф. (Қазақстан)
Оздоев С.М. проф., академик (Қазақстан)
Постолатий В. проф., академик (Молдова)
Ракишев Б.Р. проф., академик (Қазақстан)
Сейтов Н.С. проф., корр.-мүшесі (Қазақстан)
Сейтмуратова Э.Ю. проф., корр.-мүшесі (Қазақстан)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (АҚШ)
Штейнер М. проф. (Германия)

«КР ҮГА Хабарлары. Геология және техникалық ғылымдар сериясы».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РКБ (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрагат комитетінде 30.04.2010 ж. берілген №10892-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылдан 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2020

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыр көш., 69а.

мекенжайы: К. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «NurNaz GRACE», Алматы қ., Рысқұлов көш., 103.

Г л а в н ы й р е д а к т о р
д. э. н., профессор, академик НАН РК
И. К. Бейсембетов
Заместитель главного редактора
Жолтаев Г.Ж. проф., доктор геол.-мин. наук

Р е д а к ц и о н а я к о л л е г и я:

Абаканов Т.Д. проф. (Казахстан)
Абишева З.С. проф., академик (Казахстан)
Агабеков В.Е. академик (Беларусь)
Алиев Т. проф., академик (Азербайджан)
Бакиров А.Б. проф., (Кыргызстан)
Беспаев Х.А. проф. (Казахстан)
Бишимбаев В.К. проф., академик (Казахстан)
Буктуков Н.С. проф., академик (Казахстан)
Булат А.Ф. проф., академик (Украина)
Ганиев И.Н. проф., академик (Таджикистан)
Грэвис Р.М. проф. (США)
Ергалиев Г.К. проф., академик (Казахстан)
Жуков Н.М. проф. (Казахстан)
Кожахметов С.М. проф., академик (Казахстан)
Конторович А.Э. проф., академик (Россия)
Курскеев А.К. проф., академик (Казахстан)
Курчавов А.М. проф., (Россия)
Медеу А.Р. проф., академик (Казахстан)
Мухамеджанов М.А. проф., чл.-корр. (Казахстан)
Нигматова С.А. проф. (Казахстан)
Оздоев С.М. проф., академик (Казахстан)
Постолатий В. проф., академик (Молдова)
Ракишев Б.Р. проф., академик (Казахстан)
Сейитов Н.С. проф., чл.-корр. (Казахстан)
Сейтмуратова Э.Ю. проф., чл.-корр. (Казахстан)
Степанец В.Г. проф., (Германия)
Хамфери Дж.Д. проф. (США)
Штейнер М. проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы).

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10892-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год.

Тираж: 300 экземпляров.

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© Национальная академия наук Республики Казахстан, 2020

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: «NurNaz GRACE», г. Алматы, ул. Рыскулова, 103.

Editor in chief
doctor of Economics, professor, academician of NAS RK

I. K. Beisembetov

Deputy editor in chief

Zholtayev G.Zh. prof., dr. geol-min. sc.

Editorial board:

Abakanov T.D. prof. (Kazakhstan)
Abisheva Z.S. prof., academician (Kazakhstan)
Agabekov V.Ye. academician (Belarus)
Aliyev T. prof., academician (Azerbaijan)
Bakirov A.B. prof., (Kyrgyzstan)
Bespayev Kh.A. prof. (Kazakhstan)
Bishimbayev V.K. prof., academician (Kazakhstan)
Buktukov N.S. prof., academician (Kazakhstan)
Bulat A.F. prof., academician (Ukraine)
Ganiyev I.N. prof., academician (Tadzhikistan)
Gravis R.M. prof. (USA)
Yergaliев G.K. prof., academician (Kazakhstan)
Zhukov N.M. prof. (Kazakhstan)
Kozhakhmetov S.M. prof., academician (Kazakhstan)
Kontorovich A.Ye. prof., academician (Russia)
Kurskeyev A.K. prof., academician (Kazakhstan)
Kurchavov A.M. prof., (Russia)
Medeu A.R. prof., academician (Kazakhstan)
Muhamedzhanov M.A. prof., corr. member. (Kazakhstan)
Nigmatova S.A. prof. (Kazakhstan)
Ozdoyev S.M. prof., academician (Kazakhstan)
Postolatii V. prof., academician (Moldova)
Rakishev B.R. prof., academician (Kazakhstan)
Seitov N.S. prof., corr. member. (Kazakhstan)
Seitmuratova Ye.U. prof., corr. member. (Kazakhstan)
Stepanets V.G. prof., (Germany)
Humphery G.D. prof. (USA)
Steiner M. prof. (Germany)

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.

ISSN 2518-170X (Online),

ISSN 2224-5278 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty).

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 10892-Ж, issued 30.04.2010.

Periodicity: 6 times a year.

Circulation: 300 copies.

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://www.geolog-technical.kz/index.php/en/>

© National Academy of Sciences of the Republic of Kazakhstan, 2020

Editorial address: Institute of Geological Sciences named after K.I. Satpayev
69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: «NurNaz GRACE», 103, Ryskulov str, Almaty.

N E W S

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

SERIES OF GEOLOGY AND TECHNICAL SCIENCES

ISSN 2224-5278

Volume 2, Number 440 (2020), 14 – 20

<https://doi.org/10.32014/2020.2518-170X.26>

UDC 550.341; 550.42 (575)

A. U. Abdullayev¹, Sh. S. Yusupov²

¹Institute of Seismology CS MES RK, Almaty, Kazakhstan;

²Institute of Seismology named after Mavlyanov,

Academy of Sciences of the Republic of Uzbekistan, Tashkent, Uzbekistan.

E-mail: u.abdullaev@mail.ru, shuhrat-1951@mail.ru

**OPTIMIZATION OF QUANTITATIVE INDICATORS
OF COMPLEX SEISMO-HYDROGEOCHEMICAL MONITORING
WITH THE PURPOSE OF FORECASTING STRONG EARTHQUAKES**

Abstract. The quantitative indicators of seismic hydrogeochemical monitoring (SHCM) conducted on the geodynamic forecasting sites of Asia are considered. It is noted that continuous multi-parameter observation is implemented on the basis of simultaneous measurement from several to tens of parameters of groundwater. The most common complex includes about 10-15 parameters (F, Cl, HCO₃, CO₃, SO₄, H₄SiO₄, Rn, He, H₂, CO₂, Ph, Eh, Q_{hole}, H_{level}, T_{water}) monitoring over many decades it has been established that the informativeness of the obtained forecast data does not depend on the number of measured parameters, but is determined by the cumulative effect of sensitive components for a given water product observed. Therefore, the optimization of the list of observable parameters for the entire landfill as a whole should be differentiated taking into account the features of each water point. This allows you to dramatically reduce the number of parameters of observation and get rid of the "ballast" indicators.

Key words: seismic hydrogeochemistry, monitoring, earthquakes, forecast, hydrogeochemical anomalies, informative.

After Tashkent (1966), Dagestan (1970) and especially, the Haichen catastrophic earthquake (1975), predicted by Chinese seismology, intensive multidisciplinary seismic prognostic studies began all over the world. Along with seismological and geophysical methods, large-scale geochemical and hydrogeological observations were deployed in order to search for precursors and forecast strong earthquakes [1,3,4,5,8,9]. It is necessary to emphasize that earthquakes of various energies constantly occur on the Earth as a continuous chain of events; meanwhile, the forecast can be made only for those rare events that are of a destructive nature. The need to forecast such earthquakes for different areas is determined differently, based on the level of their seismic activity [2,3].

Ideology of geochemical and hydrogeological monitoring. The forecast paradigm was based on the well-known models of earthquake preparation and on this basic avalanche-unstable crack formation (AUC) and diffusion-dilatant development of the source (DD). It was assumed that in the focal zone of the earthquake there occurs a jump-increasing accumulation of elastic energy, which after a critical state passes to a mechanical discontinuity of the continuity of the medium with the generation of seismic waves, i.e. to an earthquake. It is assumed that in this process a wide class of precursors of various amplitudes should arise in deformation, geophysical, geochemical, and hydrogeological fields. The occurrence of hydrogeochemical anomalies was associated with the arrival of new fluids from the focal zone or the displacement of different chemical composition in the preparation zone of the earthquake [1,2,4-11]. The forecast paradigm consisted in solving the inverse problem: by the signs - the precursors and by the time of their development in the controlled area to establish the probable time and place of occurrence of the expected event, and by the intensity of anomalies - their probable energy. This scientific concept has determined the main way to achieve the goal - the creation of continuous mode multidisciplinary observations at special test sites on the principle: the wider the area and the larger the set

of observation parameters, the more reliable the detection of precursors. With sufficiently strong financial support from the states, especially the USSR, China, Japan, Italy, Greece, etc., in the 1980s – 1990s, large-scale monitoring observations were conducted to predict earthquakes on so-called geodynamic or prognostic sites. For example, in the USSR such landfills unfolded in all seismic areas of the Caucasus, Central Asia, Kazakhstan, Baikal and the Kuril-Kamchatka region, where they began to observe more than a hundred wells and water points. The most powerful development of hydrogeochemical (HGC) and hydrogeodynamic (HGD) observations unfolded in the People's Republic of China on the basis of more than 1,000 wells and special wells with the extensive development of a network of "people's-observers-enthusiasts." At various landfills, the list of observed parameters with discreteness from continuous hourly to daily was different, but the overall large set of indicators, in general, in the world amounted to more than 40 items [1,13-15] (table 1-9). It should be noted that the largest developed program of field observations with a large set of measured parameters was organized in Kazakhstan [1,3,4,5,8,9] (tables 1 and 2). All observation grounds in the USSR were constructed according to special guidelines [12].

The main results of field observations and experimental studies.

For each water point, first of all, long-term background values of the parameters were obtained and their anomalous fluctuations were recorded on the eve of many strong earthquakes. They were noted at various distances from the epicenters (tens and hundreds of kilometers). Such anomalies consisted of intermittent alternating temporal changes of various parameters having various forms, which can be reduced to the following four morphogenetic groups: coves, semi-bottoms, "jumps-pulsations" and spontaneous bursts. In amplitude of changes, they usually exceed the background values of the parameters by 20-50% to 100%, and sometimes they have significant one-time variations. The most important features of these anomalies are: 1) the instability of their development over time and in the area (flicker); 2) their rapid return to the initial background value after earthquake relaxation; 3) "long-range", manifested in tens and hundreds of km from the earthquake source, it turned out that many anomalies are not associated with specific earthquakes and were caused by the impact on the relevant parameters of external atmospheric and cosmophysical factors and man-made interference [1]. Anomalies caused by the nature of periodic rhythmic phenomena. These factors created a lot of noise and false alarms, comparable in magnitude and time with the anomalies that occur during the preparation of earthquakes.

Very often, HGC and HGD anomalies occurred in the non-focal zone of earthquakes at significant distances, reflecting the stress-strain state (SSS) in the surface part of the earth's crust, where water observation points are located. The observed anomalies were a consequence of the development of deformation processes. Thus, we can conclude that the fluid anomalies of the expected earthquake are the result of an imbalance in the local equilibrium hydrogeochemical water-rock-gas systems with the generation of dissipative temporal anomalies as a response of these systems to external forces in full compliance with Le Chatelier's law [1]. From this it becomes obvious that strong earthquakes are being prepared on a fairly large area as a result of the restructuring of the geoblocks' SSS and their repacking [1,2,4,6,9-11]. Detailed studies of the time course, parameters of geochemical, hydrogeochemical and hydrogeodynamic fields on the eve of earthquakes showed that anomalies are not only statistically significant changes in the course of parameters of different nature and changes in the frequency-spectral characteristics of the series itself in those time intervals that reflect the non-linear development of the instability process itself with the formation of a violation in the correlation of regular components of time series such as, for example, with R_{atm} , T_{water} , TF (tidal forces). It is established that the high-frequency component of the geochemical, hydrogeochemical and hydrogeodynamic fields carries the greatest information in terms of recognizing geodynamic instability.

At the beginning of seismic hydrogeochemical studies (70-90s of the 20th century) in large research laboratories of GEOKHI, IGEM and IPD of the Academy of Sciences of the USSR; SIMS and VSEGINGEO MG of the USSR, as well as the Institute of Seismology, Academy of Sciences of Uzb. SSR, IS AN Kaz. SSR, Institute of Physics, Academy of Sciences Kirg. USSR and others, where mass spectrometers and other devices were installed, and it was revealed that on the eve of the realization of strong earthquakes, significant precursor changes in the isotopic ratios of many elements take place: hydrogen, oxygen, carbon, uranium, helium, argon ($^3He / ^4He$, $^{13}C / ^{12}C$, $^{36}Ar / ^{40}Ar$, $^{234}U / ^{238}U$). However, due to the high complexity and laboriousness of these analyzes, their high costs and the impossibility of performing analyzes in a continuous mode, such parameters have not been developed in the number of indicative monitoring indicators of earthquakes.

Table 1 – The list of measured parameters of the complex hydrogeochemical monitoring and the equipment used at the Almaty prognostic site for the purpose of predicting strong earthquakes (Kazakhstan)

Main indicators	№	Options	Method of Definition	
			Manual measurements	Automatic measurements
Dynamic performance	1	H _{level}	Visual (by line), by level gauge	Ultrasound method
	2	Q	Volumetric (using a measuring tank and a stopwatch)	volumetric
	3	P _{hole}	Manometer	Manometer
Physical and chemical indicators	4	Ph	Potentiometric method (ionomers)	Potentiometric method
	5	Eh		
	6	P	Water conductivity	Portable tester
	7	T _{water}	visual	Thermometer
	8	Rn	Emanational	Emanational device, method ("Radon")
	9	Gf	Volumetric method	
The main ion-salt composition of thermal waters	10	Ca ²⁺	Volumetric visual method (titrimetric)	
	11	Mg ²⁺		
	12	Cl		
	13	H ₄ SiO ₄	Colorimetric method ("KFK-2", "KFK-3")	
	14	S0 ₄ ²⁻		
	15	F		
Gas composition	16	K ⁺	Flame Photometric Method ("PFP -7")	
	17	Na ⁺		
	18	HC0 ₃ ⁻	Volumetric titromereous method ("BAT" -block aut. Titration)	
	19	C0 ₃ ²⁻		
	20	OH ["]		
	21	He _{cn}	Chromatographic Spontaneous gas method (chromatograph "COLOR - 800")	
Geophysical indicator of external fields	22	He _p		
	23	H ₂		
	24	CH ₄		
	25	CO ₂		
	26	O ₂		
	27	N ₂		
Related Parameters	28	(EHII)	Natural neutron flux (NNF). (detector of slow neutrons "PKC-01Н-СОЛО")	
Geophysical indicator of external fields	29	P _{атм} ¹ атм	Automatic recording of air temperature and atmospheric pressure ("Barometers and thermometers")	
	30	T _{возд}		

Table 2 – The abbreviated list of hydrogeochemical parameters adopted for seismic forecast observations in the MG system of the Kazakh SSR in 1985-1988 (Kazakhstan)

Defined parameters	Rn, F, Cl, Li, Sz, He, H ₂ , CH ₄	Quantity
		8

Table 3 – Bishkek polygon (Kyrgyzstan)

Dynamic and physical parameters	Gases	Chemical composition of groundwater	Quantity
Ph, Eh, Q _{CKB} , H _{vn} , T _{воды}	C0 ₂ , Gf	F, C1, HC0 ₃ ⁻ , S0 ₄ ²⁻ , Ca, Mg ²⁺	13

Table 4 – Tashkent polygon (Uzbekistan)

Dynamic and physical parameters	Gases	Chemical composition of groundwater	Quantity
Ph, Eh, Q _{CKB} , H _{yp} , T _{воды}	C0 ₂ , H ₂ , CH, Rn, He, A1	Br, B, F, HC0 ₃ , S0 ₄ , Cl, Si	20

Table 5 – Dushanbe polygon (Tajikistan)

Dynamic and physical parameters	Gases	Chemical composition of groundwater	Quantity
Ph, Q _{CKB} , H _{yp} , T _{воды}	H ₂ S, He, Rn, C _O ₂	HC _O ₃ \C _O ₃ ⁻² , Cr	11

Table 6 – Urumqi polygon (XUAR of China)

Dynamic and physical parameters	Gases	Chemical composition	Quantity
Ph, Eh, Q _{CKB} , H _{yp} , T _{воды}	Rn, C _O ₂ , He, H ₂ S	C ₁ , HC _O ₃ ⁻ , F ⁻ , SO ₄ ⁻² , Mg ²⁺	15

Table 7 – Dagestan seismic polygon (Caucasus)

Dynamic and physical parameters	Gases	Chemical composition of groundwater	Quantity
Q _{CKB} , Ph, M	Rn, C _O ₂ CH ₄ , H ₂ , T°C, H ₂ S	HC _O ₃ , Cl ⁻ , SO ₄ ⁻² -Ca, Na, Mg	15

Table 8 – Kurile-Kamchatka polygon (Russia)

Dynamic parameters	Gases	Chemical composition of groundwater	Quantity
Q _{CKB} , H _{yp}	C ₃ H ₆ , C ₂ H ₄	HCO ₃ ⁻ , Cl ⁻ , SO ₄ ⁻² , Na ⁻ , Ca ²⁺	9


Table 9 – Japan Geochemical Monitoring Program

Dynamic parameters	Gases	Isotopes	Chemical composition of groundwater	Quantity
Gases and H _{yp} , T _{воды}	Rn, C _O ₂ , He	³ He/ ⁴ He	Cl, SO ₄ , K, Na, Ca, Mg, Si, B, Mo, Sr	16

Optimization of the required list of measured parameters of hydrogeochemical monitoring.

A large list of parameters on landfills has always created a lot of technical problems, as well as difficulty in the operational processing of many time series. Conducting full chemical analyses of groundwater online is difficult. Meanwhile, the experience of long-range field observations [9] makes it possible to move from initially multicomponent observations to rationally reduced, which allows significant savings in financial resources, facilitates chemical analyzes, makes fuller use of automated observation systems. The procedure of optimization of the list of measured parameters implies, first of all, to comply with the condition: "not to lose information". It is necessary to observe such parameters that meet the following requirements:

- 1) the highest frequency of abnormal changes before earthquakes;
- 2) simple and real-time measurability of parameters in automatic mode with a data sampling frequency of at least 1 hour;
- 3) availability of a reliable instrumental base of measured parameters;
- 4) sensitive parameter response to deformation processes in locally equilibrium hydrogeochemical systems.

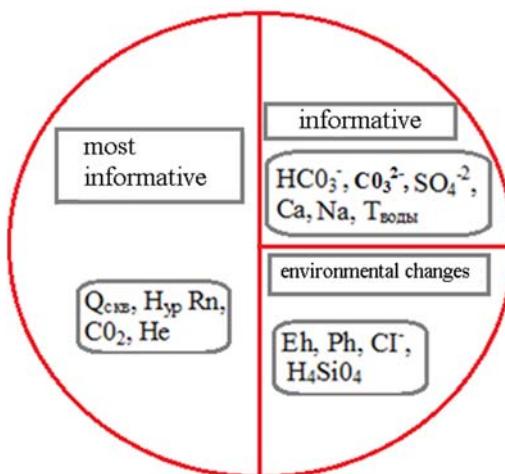

Fundamental classification of informativity of seismic and hydrogeochemical field indicators

It has been established that there is no single stable for all precursor parameter or set of hydrogeochemical parameters for all regions and polygons and even observation points, which indicates

the absence of universal precursors of earthquakes. Analysis of data for all forecasting polygons of the world shows that anomalous variations of certain parameters are not permanent indicators of earthquake preparation. Indicator in some cases, the components in other cases were not. Some earthquakes were generally not preceded by any anomalies, but occurred suddenly. However, in general, a certain range of parameters is established, which manifests itself most often when monitoring earthquakes. These include: the level of groundwater (flow rate of self-discharging wells (H_{level} , Q), as well as T_{water} , Rn, CO_2 , He, Hg, and in the composition of groundwater Cl^- , SO_4^{2-} , HCO_3^- , Na^+ , Ca^{2+} and thermodynamic indicators states of water - Eh (redox potential), as well as the cumulative parameter - E, Pn ionic strength (Is), groundwater (solution). The degree of relative and informativeness is presented in the figure.

Comparative data analysis of the entire list of parameters over a long observation period allows you to go from studying the seismic prognostic information content of a wide range of components to a rationally reduced list of parameters (table 10), up to 13 items (no chemistry to 7). Together, by calculating the integral indices, they give, possibly, maximum information about the real seismic situation at the landfill. In case of lack of opportunities for express chemical analyzes of water, it is possible to conduct monitoring on the basis of the necessary abbreviated list of 5 items, which can be carried out completely on an automated basis (table 11).

Table 10 – List of parameters of the complex seismic and hydrogeochemical monitoring of groundwater for predicting strong earthquakes, recommended by the results of long-term observations at the forecasting sites of Kazakhstan, Kyrgyzstan, Uzbekistan and XUAR of China

Main indicators	List of indicative parameters	Quantity
Physical parameters	Ph , T_{water}	2
Dynamic parameters	Q_{hole} , H_{level}	2
Gas components	Rn_{water} , Rn_{soil} , CO_2 , He, H_2	4
Chemical composition	$[Na^+, Ca^{2+}]$, $C1$, $HC0^-$, SO_4^{2-}	5
	Total	13

Table 11 – Necessary abbreviated list of parameters of seismic and hydrogeochemical monitoring for prediction of seismic hazard in local areas of automated observation

1	Groundwater dynamics	Q_{hole} or H_{level}	Quantity
2	Variations of radon in the surface atmosphere	Rn_{soil}	1
3	Through gas flows	CO_2 , H_2	2

Such methods allow you to continuously calculate very important and sensitive integral indicators of groundwater, such as the ionic strength of the solution (Is) and the time course of anion-cation ratios ($P_{acr} = A/K$), as well as determine the radon emanation (Rn) in water and in the surface atmosphere (soil) and their ratios. Such optimization of the list of integrated HGC monitoring fundamentally improves the quality of measurements, helps to simplify monitoring technology, significantly save material resources and speed up data processing, and also allows concentrating on the operational collection of a limited range of data and improving the short-term forecast method of strong earthquakes.

Such methods make it possible to calculate important and sensitive integral indicators of groundwater, such as the ionic strength of the solution (Is) and the anion-cation ratio ($P_{acr} = A / K$), as well as determine the radon emanation (Rn) both in water and in the surface atmosphere (soil). Such optimization of the list of integrated HGC monitoring fundamentally improves and facilitates the monitoring technology, allowing you to significantly save material resources and speed up data processing, which leads to an improvement in the short-term forecast method of strong earthquakes. At the final stage, on the basis of such monitoring data, a seismohydro-information analytical system should be created for earthquake prediction [13].

Conclusion. A large list of measured parameters does not increase the information content of the landfill; moreover, it distracts from the prompt processing of a huge array of related and secondary data. In this regard, it is necessary to optimize the list of observed parameters for each water point and determine their degree of information in the general list. The key to success in this option lies in the efficiency and continuity of a limited range of parameters for a short-term forecast. In all cases, it is necessary to measure the indicators of external factors (R_{atm} , T_{air} , etc.) that affect the course of indicative parameters.

А. У. Абдулаев¹, Ш. С. Юсупов²

¹КР БФМ Сейсмология институты, Алматы, Қазақстан;

²Мавлянов атындағы ОР Сейсмология институты, Ташкент, Өзбекстан

**КОМПЛЕКСТИК СЕЙСМОГИДРОГЕОХИМИЯЛЫҚ МОНИТОРИНГТІҢ
САНДЫҚ ҚӨРСЕТКІШТЕРІН КҮШТІ ЖЕР СІЛКІНІСТЕРІН
БОЛЖАУ МАҚСАТАНЫНДА ОҢТАЙЛАНДЫРУ**

Аннотация. Азияның геодинамикалық болжай участкерінде жүргізілген сейсмикалық гидрогеохимиялық мониторингтің (СГГХМ) сандық қөрсеткіштері каастырылған. Қөптеген параметрлерді үздіксіз бақылап отыру жер асты суларының бірнеше ондаған параметрлеріне бір мезгілде өлшеу негізінде жүзеге асырылатынын атап өту керек. Ең көп тараған кешен 10-15 параметрді (F , Cl , HCO_3 , CO_3 , SO_4 , H_4SiO_4 , Rn , He , H_2 , CO_2 , Ph , Eh , Q_{sev} , H_{up} , T_{water}) қамтиды. Қөптеген ондаған жылдар бойы бақыланған ақпарат алынған ақпараттардың ақпараттылығы олшенген параметрлер санына тәуелді емес, бірақ байқалатын су өнімдеріне сезімтал компоненттердің кумулятивтік әсерімен анықталғаны анықталады. Сондықтан тұтастай полигондар үшін бақыланатын параметрлер тізбесін оңтайландағы әрбір су нұктесінің ерекшеліктерін ескере отырып саралануы керек. Бұл байқау параметрлерінің санын айтартықтай азайтуға және «балласт» индикаторларынан құтылуға мүмкіндік береді.

Бастапқыда геохимиялық (ГМ) және гидрогеологиялық мониторингтің (ГГМ) жер сілкінісіне дайындықтың танымал модельдеріне – көшкін-тұраксыз жарықтардың пайда болуына (ЛНТ) немесе диффузиялық-дилатанттық фокустық дамуға (ДД) негізделген болатын. Зерттеушілер жер сілкінісі ошақты аймағында серпімді энергияның жинақталуының күрт артуын болжады, ол критикалық деңгейге жеткеннен кейін, сейсмикалық толқындардың пайда болуымен ортандық механикалық ажыратылуына көшеді жер сілкінісіне дейін. Бұл процесте әртүрлі салаларда – деформация, магниттік, геофизикалық, геохимиялық, гидрогеодинамикалық, геотермалдық және т.б. алдын-ала ауыткулардың кең тобы пайда болады деген сенім болды. Бұл жағдайда ГГХ және ГХ прекурсорларының пайда болуы фокустық аймактардан сұйықтықтардың жана бөліктерінің келуімен немесе әртүрлі химиялық құрамдар мен газ әмменттерінің суларының араласуымен және күшті жер сілкіністерін дайындау аймағында жер қыртысының қызығымен тікелей байланысты болды. Шын мәнінде, болжамды парадигма кері есепті шешу үшін болды: болжамды жер сілкінісінің болжамды уақыты мен орнын және олардың бақыланатын аймактағы даму уақытын және аномалиялардың қарқындылығымен оның ықтималдығын анықтау.

Мұндай тұжырымдама мақсатқа жетудің негізгі жолын анықтады – жер сілкінісіне дайындықты бақылау үшін арнайы полигондар құру: аймақ неғұрлым кең болса және бақылау жиынтығы неғұрлым көп болса, жер сілкінісіне дайындық белгілерін дәллірек анықтайды.

Түйін сөздер: сейсмикалық гидрогеохимия, мониторинг, жер сілкінісі, болжау, гидрогеохимиялық ауыткулар, ақпараттылық.

А. У. Абдулаев¹, Ш. С. Юсупов²

¹Институт Сейсмологии КН МОН РК, Алматы, Казахстан;

²Институт сейсмологии АН РУз им. Мавлянова, Ташкент, Узбекистан

**ОПТИМИЗАЦИЯ КОЛИЧЕСТВЕННЫХ ПОКАЗАТЕЛЕЙ КОМПЛЕКСНОГО
СЕЙСМОГИДРОГЕОХИМИЧЕСКОГО МОНИТОРИНГА
С ЦЕЛЬЮ ПРОГНОЗА СИЛЬНЫХ ЗЕМЛЕТРЯСЕНИЙ**

Аннотация. Рассмотрены количественные показатели сейсмогидрогеохимического мониторинга (СГГХМ), проводимые на геодинамических прогностических полигонах Азии. Отмечается, что непрерывное многопараметрическое наблюдение реализуется на основе одновременного измерения от нескольких до десятков параметров подземных вод. Наиболее распространенный комплекс включает в себя около 10-15 параметров (F , Cl , HCO_3 , CO_3 , SO_4 , H_4SiO_4 , Rn , He , H_2 , CO_2 , Ph , Eh , Q_{sev} , H_{up} , T_{water}). В результате анализа эффективности количественных показателей ГГХ мониторинга за многие десятилетия установлено, что информативность полученных прогнозных данных не зависит от количества измеренных параметров, и определяется совокупным эффектом чувствительных компонентов для данного водопункта наблюдения. Поэтому оптимизация перечня наблюдаемых параметров для всего полигона в целом, должна быть дифференцирована с учетом особенности каждого водопункта. Это позволяет резко сократить количество параметров наблюдения и избавляться от «балластных» показателей.

Изначально идеология геохимического (ГХ) и гидрогеологического мониторинга (ГГМ) была основана на известных моделях подготовки землетрясений – лавинно-неустойчивого трещинообразования (ЛНТ) или диффузионно-дилатантного развития очага (ДД). Исследователи предполагали, что в очаговой области землетрясений происходит скачкообразное нарастающее накопление упругой энергии, которая после достижения критического уровня переходит к механическому разрыву среды с генерацией сейсмических волн, т.е. к землетрясению. Была уверенность в том, что в этом процессе возникает широкий класс предваряющих аномалий в различных полях – деформационном, магнитном, геофизическом, геохимическом, гидрогеодинамическом, геотермическом и т.д. при этом возникновение ГГХ и ГГ предвестников напрямую связывалось с поступлением новых порций флюидов из очаговых зон или смешением вод различного химического состава и газовых эманаций и прогревом земной коры в области подготовки сильных землетрясений. Собственно парадигма прогноза заключалась в решении обратной задачи: по предвестникам и временем их развития на контролируемой площади установить вероятное время и место реализации ожидаемого землетрясения, а по интенсивности проявления аномалий – его вероятную силу.

Такая концепция определила основной путь к достижению цели – создать специальные полигоны для отслеживания подготовки землетрясений по принципу: чем шире площади и больше набор наблюдения, тем надежнее обнаружение признаков подготовки землетрясений.

Ключевые слова: сейсмогидрохимия, мониторинг, землетрясения, прогноз, гидрогеохимические аномалии, информативность.

Information about authors:

Abdullaev Abdulaziz, Institute of Seismology KN MON RK, Almaty, Kazakhstan; u.abdullaev@mail.ru; <https://orcid.org/0000-0003-1975-4569>

Yusupov Sh. S., Institute of Seismology named after Mavlyanov, Academy of Sciences of the Republic of Uzbekistan, Tashkent, Uzbekistan; shuhrat-1951@mail.ru

REFERENCES

- [1] Abdullaev A.U. Fluid regime of the earth's crust as a reflection of modern geodynamic processes (for example, Tien Shan). Almaty: Evero. 2002. 352 p.
- [2] Abdullaev A.U. The development of views on the problem of forecasting earthquakes and the formation of new forecast paradigms // Geological science and industrial development of the Republic of Kazakhstan. Almaty. 2010. P.316-321.
- [3] Abdullaev A.U. To the new strategy and paradigms of earthquake prediction. Earthquake prediction, seismic hazard and seismic risk assessment of Central Asia. Almaty. 2010. P. 136-142.
- [4] Abdullaev A.U., GavShavchi, Mamyrov E.M., Grebennikova V.V., Yusupov Sh.Yu. International cooperation of hydrogeoseismologists for the monitoring of fluid parameters and prediction of strong earthquakes in the Tian-Shan seismic belt. (Proceedings of the VI International Symposium) Bishkek, 2014. P. 226-236.
- [5] Abdullaev A.U. Hydrogeochemical and hydrodynamic methods in the earthquake prediction system in Kazakhstan // Earthquake prediction. Deep geodynamics. Almaty. 1997. P. 196-220.
- [6] Abdullaev A.U. Active geochemical and hydrogeological monitoring of seismically active areas and forecasting of modern geodynamic processes // Geodynamics and geoecology of high mountain regions in the XXI. M. Bishkek. 2007. P. 70-76.
- [7] Hydrogeochemical earthquake precursors // M.: Science. 1985. 285 p.
- [8] Pulinets S.A., Uzumov D.P., Davidasko. Earthquake forecast possible // M.: "Trovant". 2014. 144 p.
- [9] Sobolev G.A. Fundamentals of Earthquake Prediction // M.: Science. 1993. 313 p.
- [10] Sobolev G.A., Ponomarev, A.V. Physics of earthquakes and precursors // M.: Science. 2003. 270 p.
- [11] Osika D.G. Fluid mode seismically active areas // M.: Science. 1981. 204 p.
- [12] Guidelines for the organization and conduct of hydrogeological observations on a specialized regional network in order to predict strong earthquakes // M.: VSEGINGEO. M: 1985. 41 p.
- [13] Abdullaev A.U., Lagutin E.I., Tukeshova G.E., Zhunisbekov T.S., Veselkina I.A., Suslova T.P., Mukhamadiev A.O., Menbayev S.M., Koblanov Z.B. The first results of the geochemical sensing tectonic faults on the basis of profile measurement of soil radon volume activity in the territory of Almaty metropolis // News of the national academy of sciences of the republic of Kazakhstan. Series of geology and technical sciences. ISSN 2224-5278. Vol. 5, N 419 (2016). P. 79-91.
- [14] Abdullaev A.U. Phase rearrangement in local balanced hydrogeochemical systems as a fluid earthquake precursors mechanism occurrence // PERIÓDICO TCHÈ QUÍMICA, Brazil. (2019). Vol. 16 (nº33). ISSN 2179-0302
- [15] Hydrogeochemical earthquake precursors// M.: Science. 1985. 3,197 p.
- [16] MurtazinY.Z., MiroshnichenkoL., Trushel L.Y. Methods of making of geoinformational and analytical system of groundwater resources in Kazakhstan // News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technical sciences ISSN 2224-5278. Vol. 5, N 431 (2018). P. 21-31. (In Eng.). <https://doi.org/10.32014/2018.2518-170X.2>
- [17] News of National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technical sciences ISSN 2518-170X. Vol. 6, N 438(2019). P. 197-205. (In Eng.). <https://doi.org/10.32014/2019.2518-170X.171>

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www:nauka-nanrk.kz

ISSN 2518-170X (Online), ISSN 2224-5278 (Print)

<http://www.geolog-technical.kz/index.php/en/>

Редакторы Д. С. Аленов, М. С. Ахметова, Т. А. Апендиев
Верстка Д. А. Абдрахимовой

Подписано в печать 13.04.2020.
Формат 70x881/8. Бумага офсетная. Печать – ризограф.
13 п.л. Тираж 300. Заказ 2.