

ISSN 2518-170X (Online),  
ISSN 2224-5278 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ  
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ  
Қ. И. Сәтпаев атындағы Қазақ ұлттық техникалық зерттеу университеті

# Х А Б А Р Л А Р Ы

---

---

## ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК  
РЕСПУБЛИКИ КАЗАХСТАН  
Казакский национальный исследовательский  
технический университет им. К. И. Сатпаева

## NEWS

OF THE ACADEMY OF SCIENCES  
OF THE REPUBLIC OF KAZAKHSTAN  
Kazakh national research technical university  
named after K. I. Satpayev

**SERIES  
OF GEOLOGY AND TECHNICAL SCIENCES**

**1 (433)**

**JANUARY – FEBRUARY 2019**

THE JOURNAL WAS FOUNDED IN 1940

PUBLISHED 6 TIMES A YEAR

ALMATY, NAS RK

---

---

*NAS RK is pleased to announce that News of NAS RK. Series of geology and technical sciences scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of geology and technical sciences in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of geology and engineering sciences to our community.*

*Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Геология және техникалық ғылымдар сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді геология және техникалық ғылымдар бойынша контентке адалдығымызды білдіреді.*

*НАН РК сообщает, что научный журнал «Известия НАН РК. Серия геологии и технических наук» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК. Серия геологии и технических наук в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по геологии и техническим наукам для нашего сообщества.*

Б а с р е д а к т о р ы  
э. ғ. д., профессор, ҚР ҰҒА академигі

**И.К. Бейсембетов**

Бас редакторының орынбасары

**Жолтаев Г.Ж.** проф., геол.-мин. ғ. докторы

Р е д а к ц и я а л қ а с ы:

**Абаканов Т.Д.** проф. (Қазақстан)  
**Абишева З.С.** проф., академик (Қазақстан)  
**Агабеков В.Е.** академик (Беларусь)  
**Алиев Т.** проф., академик (Әзірбайжан)  
**Бакиров А.Б.** проф., (Қырғыстан)  
**Беспәев Х.А.** проф. (Қазақстан)  
**Бишимбаев В.К.** проф., академик (Қазақстан)  
**Буктуков Н.С.** проф., академик (Қазақстан)  
**Булат А.Ф.** проф., академик (Украина)  
**Ганиев И.Н.** проф., академик (Тәжікстан)  
**Грэвис Р.М.** проф. (АҚШ)  
**Ерғалиев Г.К.** проф., академик (Қазақстан)  
**Жуков Н.М.** проф. (Қазақстан)  
**Қожахметов С.М.** проф., академик (Қазақстан)  
**Конторович А.Э.** проф., академик (Ресей)  
**Курскеев А.К.** проф., академик (Қазақстан)  
**Курчавов А.М.** проф., (Ресей)  
**Медеу А.Р.** проф., академик (Қазақстан)  
**Мұхамеджанов М.А.** проф., корр.-мүшесі (Қазақстан)  
**Нигматова С.А.** проф. (Қазақстан)  
**Оздоев С.М.** проф., академик (Қазақстан)  
**Постолатий В.** проф., академик (Молдова)  
**Ракишев Б.Р.** проф., академик (Қазақстан)  
**Сейтов Н.С.** проф., корр.-мүшесі (Қазақстан)  
**Сейтмуратова Э.Ю.** проф., корр.-мүшесі (Қазақстан)  
**Степанец В.Г.** проф., (Германия)  
**Хамфери Дж.Д.** проф. (АҚШ)  
**Штейнер М.** проф. (Германия)

«ҚР ҰҒА Хабарлары. Геология мен техникалық ғылымдар сериясы».

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» РҚБ (Алматы қ.).

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде  
30.04.2010 ж. берілген №10892-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік.

Мерзімділігі: жылына 6 рет.

Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,  
<http://www.geolog-technical.kz/index.php/en/>

---

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2019

Редакцияның Қазақстан, 050010, Алматы қ., Қабанбай батыра көш., 69а.

мекенжайы: Қ. И. Сәтбаев атындағы геология ғылымдар институты, 334 бөлме. Тел.: 291-59-38.

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Г л а в н ы й р е д а к т о р  
д. э. н., профессор, академик НАН РК

**И. К. Бейсембетов**

Заместитель главного редактора

**Жолтаев Г.Ж.** проф., доктор геол.-мин. наук

Р е д а к ц и о н н а я к о л л е г и я:

**Абаканов Т.Д.** проф. (Казахстан)  
**Абишева З.С.** проф., академик (Казахстан)  
**Агабеков В.Е.** академик (Беларусь)  
**Алиев Т.** проф., академик (Азербайджан)  
**Бакиров А.Б.** проф., (Кыргызстан)  
**Беспаяев Х.А.** проф. (Казахстан)  
**Бишимбаев В.К.** проф., академик (Казахстан)  
**Буктуков Н.С.** проф., академик (Казахстан)  
**Булат А.Ф.** проф., академик (Украина)  
**Ганиев И.Н.** проф., академик (Таджикистан)  
**Грэвис Р.М.** проф. (США)  
**Ергалиев Г.К.** проф., академик (Казахстан)  
**Жуков Н.М.** проф. (Казахстан)  
**Кожаметов С.М.** проф., академик (Казахстан)  
**Конторович А.Э.** проф., академик (Россия)  
**Курскеев А.К.** проф., академик (Казахстан)  
**Курчавов А.М.** проф., (Россия)  
**Медеу А.Р.** проф., академик (Казахстан)  
**Мухамеджанов М.А.** проф., чл.-корр. (Казахстан)  
**Нигматова С.А.** проф. (Казахстан)  
**Оздоев С.М.** проф., академик (Казахстан)  
**Постолатий В.** проф., академик (Молдова)  
**Ракишев Б.Р.** проф., академик (Казахстан)  
**Сейтов Н.С.** проф., чл.-корр. (Казахстан)  
**Сейтмуратова Э.Ю.** проф., чл.-корр. (Казахстан)  
**Степанец В.Г.** проф., (Германия)  
**Хамфери Дж.Д.** проф. (США)  
**Штейнер М.** проф. (Германия)

«Известия НАН РК. Серия геологии и технических наук».

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №10892-Ж, выданное 30.04.2010 г.

Периодичность: 6 раз в год

Тираж: 300 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел.: 272-13-19, 272-13-18,  
<http://nauka-nanrk.kz/geology-technical.kz>

---

© Национальная академия наук Республики Казахстан, 2019

Адрес редакции: Казахстан, 050010, г. Алматы, ул. Кабанбай батыра, 69а.

Институт геологических наук им. К. И. Сатпаева, комната 334. Тел.: 291-59-38.

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

E d i t o r i n c h i e f

doctor of Economics, professor, academician of NAS RK

**I. K. Beisembetov**

Deputy editor in chief

**Zholtayev G.Zh.** prof., dr. geol-min. sc.

E d i t o r i a l b o a r d:

**Abakanov T.D.** prof. (Kazakhstan)  
**Abisheva Z.S.** prof., academician (Kazakhstan)  
**Agabekov V.Ye.** academician (Belarus)  
**Aliyev T.** prof., academician (Azerbaijan)  
**Bakirov A.B.** prof., (Kyrgyzstan)  
**Bespayev Kh.A.** prof. (Kazakhstan)  
**Bishimbayev V.K.** prof., academician (Kazakhstan)  
**Buktukov N.S.** prof., academician (Kazakhstan)  
**Bulat A.F.** prof., academician (Ukraine)  
**Ganiyev I.N.** prof., academician (Tadjikistan)  
**Gravis R.M.** prof. (USA)  
**Yergaliev G.K.** prof., academician (Kazakhstan)  
**Zhukov N.M.** prof. (Kazakhstan)  
**Kozhakhmetov S.M.** prof., academician (Kazakhstan)  
**Kontorovich A.Ye.** prof., academician (Russia)  
**Kurskeyev A.K.** prof., academician (Kazakhstan)  
**Kurchavov A.M.** prof., (Russia)  
**Medeu A.R.** prof., academician (Kazakhstan)  
**Muhamedzhanov M.A.** prof., corr. member. (Kazakhstan)  
**Nigmatova S.A.** prof. (Kazakhstan)  
**Ozdoyev S.M.** prof., academician (Kazakhstan)  
**Postolatii V.** prof., academician (Moldova)  
**Rakishev B.R.** prof., academician (Kazakhstan)  
**Seitov N.S.** prof., corr. member. (Kazakhstan)  
**Seitmuratova Ye.U.** prof., corr. member. (Kazakhstan)  
**Stepanets V.G.** prof., (Germany)  
**Humphery G.D.** prof. (USA)  
**Steiner M.** prof. (Germany)

**News of the National Academy of Sciences of the Republic of Kazakhstan. Series of geology and technology sciences.**

**ISSN 2518-170X (Online),**

**ISSN 2224-5278 (Print)**

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of information and archives of the Ministry of culture and information of the Republic of Kazakhstan N 10892-Ж, issued 30.04.2010

Periodicity: 6 times a year

Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,  
<http://nauka-nanrk.kz/geology-technical.kz>

---

© National Academy of Sciences of the Republic of Kazakhstan, 2019

Editorial address: Institute of Geological Sciences named after K.I. Satpayev  
69a, Kabanbai batyr str., of. 334, Almaty, 050010, Kazakhstan, tel.: 291-59-38.

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

**NEWS**

OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN

**SERIES OF GEOLOGY AND TECHNICAL SCIENCES**

ISSN 2224-5278

Volume 1, Number 433 (2019), 163 – 168

<https://doi.org/10.32014/2019.2518-170X.20>

UDC 514.182.7

**N. S. Umbetov<sup>1</sup>, Zh. Zh. Dzhanabaev<sup>1</sup>, G. S. Ivanov<sup>2</sup>**<sup>1</sup>M. Auezov South Kazakhstan State University, Shymkent, Kazakhstan,<sup>2</sup>Bauman Moscow State Technical University, Moscow, Russia.

E-mail: nurlanumbetov@mail.ru; djanabaev@mail.ru; ivanov\_gs@rambler.ru

**GEOMETRIC MODELING  
OF LAYING GEODETIC LINES  
ON RULED SURFACES**

**Abstract.** Geodesic lines find interesting applications during solving most tasks of the fundamental sciences (mathematics, physics and other) and engineering practice. In differential geometry, the geodesic lines are typical lines for determination of the inner properties of the surface. However, the formation of the geodesic line on the surface envisages certain difficulties, and are solved generally by methods of the computing mathematics and descriptive geometry.

In this article, the development of simple and convenient algorithm of formation of the geodesic line on ruled surfaces are considered. In common case, the three-dimensional model of the geodetic line formation algorithm on the ruled surface is expressed in following: the ruled surface we replace by sided surface, and at any position of the considered side, the intersection point of the geodesic line with the edge of fracture (curvature of the two-sided angle) will be identified as the cross point of the adjacent generatrix with the surface of the cone of revolution – congruence of geodesic line laying directions with the peak at initial point, rotation axis, incident to the considered generatrix, and angle at the cone peak, equal to the doubled angle between rotation axis and geodesic line laying direction. Next, as the initial parameters the adjacent with mentioned generatrix, upper determined point, laying on it, and direction of the geodesic line – angle between section of the obtained geodetic and adjacent generatrix, are accepted. Thus, multiply repeating the described cycle, we obtain mass of points, which composes the desired geodetic line. Hereby the mathematic description of this algorithm is provided.

**Key words:** descriptive geometry; ruled surface; generatrix; laying direction; direction congruence; geodetic line; point of intersection.

When solving many problems of fundamental sciences (mathematics, physics, etc.) and of engineering practice, the creation of a mathematical model of an object or process is reduced to the construction of networks of special lines (curvature, asymptotic, geodesic, level, the maximum slope, etc.) belonging to curved surfaces of objects, surfaces describing the dependence of "composition-property", etc. Families of geodetic lines occupy a worthy place among them and have great theoretical and applied value.

In differential geometry, geodesic lines are characteristic lines for determining the internal properties of a surface, and by drawing geodesic lines and measuring their lengths, you can determine all the internal properties of a surface (for example, Gaussian curvature). This is explained by the fact that any sufficiently small arc of the geodesic line represents the shortest line on the surface among all the lines connecting the ends of this arc that can be drawn on the surface [4]. However, the construction of a geodesic line on the surface is a certain difficulty, which is solved mainly by methods of computational mathematics and descriptive geometry.

In differential geometry the geodesic line is specified by differential equation of the 2<sup>nd</sup> order with ordinary derivative [4]:

$$\begin{aligned} \frac{d^2u}{dt^2} + \Gamma_{11}^1 \left(\frac{du}{dt}\right)^2 + \Gamma_{12}^1 \left(\frac{du}{dt} \frac{dv}{dt}\right) + \Gamma_{22}^1 \left(\frac{dv}{dt}\right)^2 &= 0, \\ \frac{d^2v}{dt^2} + \Gamma_{11}^2 \left(\frac{du}{dt}\right)^2 + \Gamma_{12}^2 \left(\frac{du}{dt} \frac{dv}{dt}\right) + \Gamma_{22}^2 \left(\frac{dv}{dt}\right)^2 &= 0, \end{aligned} \quad (1)$$

where  $\Gamma_{ij}$  - Cristoffer's symbols of the 2nd order. They expressed only through the coefficients of the first quadratic form and its' derivative.

From the properties of the differential equations, it is observed that through each point on each direction one and only that one geodesic line permeates. Therefore, geodesic lines form the two-parameter plurality. These parameters are determined from the initial conditions, which are specified as below:

- with point  $A(u_0, v_0)$  and direction  $t$  of curve  $(du/dt = p)$  in this point  $A$ ;
- with two points  $A(u_h, v_h)$  and  $B(u_k, v_k)$ , incident to that curve.

Problems solved with these initial conditions are formulated as:

- 1) build on the surface the geodesic line through the point in specified direction;
- 2) connect by geodesic line two points of the surface.

Differential equation (1) of geodesic line in common cases is not possible to be integrated, even in case of unary surface, therefore it is solved mainly by numerical methods [4]. The technical surfaces in general cases are constituent, therefore it is necessary to elaborate a simple and convenient algorithm, designated for the geometric modelling of the geodesic lines on composite surfaces.

In the area of the applied geometry the rank of authors elaborated the graphic ways of solving the problems of building the geodesic line on surface with usage of the descriptive geometry. These works are G.E. Pavlenko [9], V.V. Vanin [2], Ivanova L.S. [6], Elkin L.M. [11], Kovalev V.N., Harchenko A.I. [7], Scheffers [12], Glagolev N.A. [5], Ryzhov N.N. [10] and others.

Known methods [2, 5-7, 9, 10-12] of building a geodetic line on the surface do not provide the fulfillment of the condition of equality to zero of the geodetic curvature of the obtained line, and as a consequence, the accuracy of laying a geodetic line in a given direction is not provided. Increasing accuracy by reducing the iteration step results in a large amount of computing operations. Also, insufficiently developed issues that take into account the features arising when overcoming the geodetic line of points and lines of the junction of the compartments of composite surfaces. Therefore, one of the components of the tasks of mathematical support of automation of some technological processes is the development of algorithms that provide high accuracy of laying a geodetic line on the technical (composite) surface.

In order to eliminate these shortcomings as much as possible, the author [13] proposed a method of constructing a geodetic line on a technical surface based on the following property of the geodetic [4]: the  $g$  line, described by the middle  $M$  of arc  $AB$ , is geodetic for a given surface  $F$ , if an infinitely small arc  $AB$  of the curve  $l$  on this surface always moves "straight", i.e. the trajectories of movement of points  $A$  and  $B$  have equal length and are perpendicular to the arc  $AB$ .

In the paper [13] it is shown that the proposed method of constructing a geodetic line has a significant advantage. The main advantage of the developed method is a strict adherence to the specified direction of laying geodetic, as well as the exclusion of unnecessary operations - construction of the involute. The error of the method is accumulated only by the error of approximation of the arcs of geodesic triangle by the corresponding line segments. Thus, the relative error of the method at the iteration step of 2 mm amounted to 0.11%. With an increase of the iteration step to 3 mm, which for modern high-speed computers is a relatively high value, the error of the method increased to 0.823%.

This article discusses the development of a simple and convenient algorithm for a particular case, the construction of a geodetic line on ruled surfaces.

The linear surfaces, formed by move of the straight line through the specified law, make a large class of surfaces of zero and non-zero Gause's curvature, which are unrolling and not unrolling. Solving of the problem of construction of the geodesic line on unrolling surfaces comes to the identification of one-to-one concordance between surface and its' involute. Then the straight line, connecting two specified points, is reflected in geodesic line on the surface. In case of non-developable surface such method is inapplicable. Therefore the elaboration of simple and convenient algorithm of construction of geodesic line on the ruler surfaces is an important task. The developed method can be used not only for ruler surfaces. The

curvilinear surfaces can be approximated ruled lines for simplification of construction the geodesic lines on them.


During the elaboration of the method the ruler surface was considered as approximated by sided surfaces (exposed to triangulation), where the rectilinear generatrices of the ruler surface – are the essence of curvature of the sided surface.

Due to this, the method of construction of the geodesic line on the ruler surface was found on the next property of the geodesic line [5]: in case of compound surface the respective angles of the adjacent arcs of geodesic line to the junction line of composing ones are equal.

The proposed algorithm, based on the given property of geodesic line, consists of the following operations:

We have ruler surface  $\Phi$ , formed by move of the straightforward generatrix  $l$  per the advanced specified law. Let specify on this surface  $\Phi$  the initial point  $M_0$ , belonging to some generatrix  $l_0$ . We know also the initial direction  $t_0$  of laying the geodesic line  $g$ , coming from the initial point  $M_0$ . Generatrix  $l$  on the surface  $\Phi$  in each its' position is uniquely defined. Therefore, the choice or identification of the point  $M$  location, belonging to that line, is not difficult.

In common case, the spatial model of the algorithm of the geodesic line construction on the ruler surface, is expressed in following: when replacing the ruler surface by sided surface, at any disposition of the considered side, the point of intersection of geodesic line with the edge of fracture (curvature of the two-sided angle) will be determined as the point of intersection of adjacent generatrix  $l_{i+1}$  with the surface of cone of revolution – congruence of directions  $t_i$  with the peak in point  $M_i$ , axis of rotation, incident to the generatrix  $l_i$  and to the angle at cone peak, equal to the doubled angle between axis of rotation  $l_i$  and direction  $t_k$  (figure).

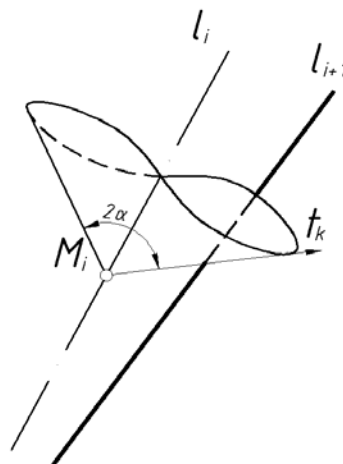

Figure

Let imagine the mathematic description of the suggested algorithm.

Problem: it is required to determine the coordinates of points of intersection of the straight line with the surface of cone.

Equation of the straight line in space, passing through the two specified points, is defined by the formula:

$$\frac{x-x_1}{a} = \frac{y-y_1}{b} = \frac{z-z_1}{c}, \tag{1}$$

where  $a = x_2 - x_1, b = y_2 - y_1, c = z_2 - z_1$ .

Equation of surface of the straight circular cone with peak at the origin of coordinates, while axis of rotation coincide with the z-axis, is expressed by formula:

$$k^2 z^2 = x^2 + y^2 \tag{2}$$

where  $k = \text{tg}\varphi$ , and  $\varphi$  – half of the angle at peak of cone of revolution.



Let solve the system of given equations. For this we express  $x$  and  $y$  by  $z$

$$x = x_1 + \frac{a}{c}(z - z_1), y = y_1 + \frac{b}{c}(z - z_1)$$

and put in (2)

$$k^2 z^2 = x_1^2 + 2\frac{a}{c}x_1(z - z_1) + \frac{a^2}{c^2}(z - z_1)^2 + y_1^2 + 2\frac{b}{c}y_1(z - z_1) + \frac{b^2}{c^2}(z - z_1)^2$$

grouping the terms of the same name, we obtain the expressions for solving the quadratic equation

$$\begin{aligned} \alpha z^2 + 2\beta z + \gamma &= 0 \\ \alpha &= (a^2 + b^2) - c^2 k^2, \\ \beta &= c(ax_1 + by_1) - z_1(a^2 + b^2), \\ \gamma &= c^2(x_1^2 + y_1^2) - 2cz_1(ax_1 + by_1) + z_1^2(a^2 + b^2). \end{aligned}$$

$$z_{1,2} = \frac{-\beta \pm \sqrt{\beta^2 - 4\alpha\gamma}}{2\alpha}$$

For preparation of the mathematic provision for compiling the program of calculation on computer the trajectory of geodesic line laying, we perform the analytic description of the proposed algorithm of solving the problems in space.

For simplification of the analytical expressions, we execute the conversion of rectangular coordinate system with transfer of origin of coordinates to the point  $M_i$  of the sought geodesic line and superposition of  $z$ -axis with generatrix direction  $l_i \supset M_i$ .

Formulas of conversion of the rectangular coordinates of the point in general case are expressed with the help of Euler's angles ( $\psi$ -angle of precession,  $\theta$ -angle of saltation,  $\varphi$ -angle of pure rotation)

$$\begin{aligned} x &= x_0 + (\cos\psi\cos\varphi - \sin\psi\cos\theta\sin\varphi)x' + (-\cos\psi\sin\varphi - \sin\psi\cos\theta\cos\varphi)y' + \sin\psi\sin\theta * z', \\ y &= y_0 + (\sin\psi\cos\varphi + \cos\psi\cos\theta\sin\varphi)x' + (-\cos\psi\sin\theta + \cos\psi\cos\theta\cos\varphi)y' + \cos\psi\sin\theta * z', \\ z &= z_0 + \sin\theta\sin\varphi * x' + \sin\theta\cos\varphi * y' + \cos\theta * z'. \end{aligned}$$

In our case the rotations are performed only twice, therefore all mathematic expressions are slightly simplified.

$$\begin{aligned} x &= x_0 + (\cos\psi)x' + (-\sin\psi)y' + \sin\psi\sin\theta * z', \\ y &= y_0 + (\sin\psi)x' + (-\cos\psi\sin\theta + \cos\psi\cos\theta\cos\varphi)y' + \cos\psi\sin\theta * z', \\ z &= z_0 + \sin\theta * y' + \cos\theta * z'. \end{aligned}$$

Since, the position of each generatrix  $l_i$  is determined, then the Euler's angles can be reckoned as known.

$$\begin{aligned} \psi &= \operatorname{arctg} \frac{(YB - YA)}{(XB - XA)}, \\ \theta &= \operatorname{arctg} \frac{(ZB - ZA)}{\operatorname{sqrt}\{(XB - XA)^2 + (YB - YA)^2\}} \end{aligned}$$

Thus, multiple repeating the described cycle, we obtain the plurality of points  $M_i$ , composing the geodesic line  $g$ .

Afterward, we assume the making of computer program and execution of calculations of geodesic line laying on different ruler surfaces. Based on calculation results we can perform the comparative analysis of degree of accuracy of geodesic line laying.

Н. С. Умбетов<sup>1</sup>, Ж. Ж. Жаңабаев<sup>1</sup>, Г. С. Иванов<sup>2</sup>

<sup>1</sup>М. Әуезов атындағы Оңтүстік Қазақстан мемлекеттік университеті, Шымкент, Қазақстан,

<sup>2</sup>Н. Бауман атындағы Мәскеу мемлекеттік техникалық университеті, Мәскеу, Ресей

### ТҮЗУ СЫЗЫҚТЫ БЕТТЕРДЕ ГЕОДЕЗИЯЛЫҚ СЫЗЫҚТАРДЫ ЖҮРГУЗУДІҢ ГЕОМЕТРИЯЛЫҚ ҮЛГІСІ

**Аннотация.** Геодезиялық сызықтар түбегейлі ғылымдар (математика, физика және басқа) және инженерлік тәжірибенің көптеген есептерін шығаруда қызықты қолданыс табады. Дифференциалды геометрияда геодезиялық сызықтар беттің ішкі қасиеттерін анықтайтын ерекше сызықтар болып табылады. Алайда берілген дененің бетінде геодезиялық сызықты тұрғызу көптеген қиындыққа келіп тіреледі, сондықтан негізінде есептеу математикасы және сызба геометрия әдістерімен шешіледі.

Ұсынылып отырған мақалада геодезиялық сызықтың түзу сызықты беттерде тұрғызудың қарапайым және пайдалануға ыңғайлы алгоритмі қарастырылған. Жалпы жағдайда, геодезиялық сызықтың түзу сызықты беттерде тұрғызудың алгоритмінің кеңістіктік үлгісін келесідей тұжырымдауға болады: түзу сызықты бетті көп жақты бетпен алмастырамыз, қарастырылып жатқан жатың кез-келген жағдайында геодезиялық сызықтың сыну қырымен (екі жақты беттің ортақ қыры) қиылысу нүктесі көрші жасаушының айналу конус бетімен қиылысу нүктесі болып анықталады. Бұл жерде айналу конус беті - төбесі бастапқы нүктеде орналасқан, осы ағымдағы жасаушы түзумен беттескен, геодезиялық сызықтың бағыттарының тобы. Конус төбесінің бұрышы айналу осі мен геодезиялық сызықтың бағыты арасындағы бұрыштың екі еселенген шамасына тең. Ары қарай көрші жасаушы бастапқы жасаушы ретінде, анықталған нүкте бастапқы нүкте ретінде (келесі конус төбесі) қабылданады да, келесі нүктені табу үшін келтірілген алгоритм қайталанатын. Осылайша, жазылған циклды көп рет қайталау арқылы ізделінген геодезиялық сызықты құрайтын көп нүктелер жиінін анықтаймыз. Осы алгоритмнің математикалық жазбасы келтірілген.

**Түйін сөздер:** сызба геометрия; түзу сызықты бет; жасаушы; сызықтардың бағыты; бағыттардың конгруэнциясы; геодезиялық сызық; қиылысу нүктесі.

Н. С. Умбетов<sup>1</sup>, Ж. Ж. Джанабаев<sup>1</sup>, Г. С. Иванов<sup>2</sup>

<sup>1</sup>Южно-Казахстанский государственный университет им. М. Ауезова, Шымкент, Казахстан,

<sup>2</sup>Московский государственный технический университет им. Н. Баумана, Москва, Россия

### ГЕОМЕТРИЧЕСКОЕ МОДЕЛИРОВАНИЕ ПРОКЛАДКИ ГЕОДЕЗИЧЕСКИХ ЛИНИИ НА ЛИНЕЙЧАТЫХ ПОВЕРХНОСТЯХ

**Аннотация.** Геодезические линии находят интересные приложения при решении многих задач фундаментальных наук (математики, физики и др.) и инженерной практики. В дифференциальной геометрии геодезические линии являются характерными линиями для определения внутренних свойств поверхности. Однако построение геодезической линии на поверхности представляет определенные сложности, решается в основном методами вычислительной математики и начертательной геометрии.

В статье рассматривается разработка простого и удобного алгоритма построения геодезической линии на линейчатых поверхностях. В общем случае, пространственная модель алгоритма построения геодезической линии на линейчатой поверхности, выражается в следующем: линейчатую поверхность заменим гранной поверхностью, при любом расположении рассматриваемой грани, точка пересечения геодезической с ребром излома (линия изгиба двугранного угла) будет определяться как точка пересечения смежной образующей с поверхностью конуса вращения – конгруэнции направлений прокладки геодезической с вершиной в исходной точке, оси вращения, инцидентной рассматриваемой образующей, и углом при вершине конуса, равной удвоенному углу между осью вращения и направлением прокладки геодезической. Далее за исходный параметры принимаются смежная с рассмотренной образующая, определенная выше точка, лежащая на ней, и направление геодезической – угол между отрезком полученной геодезической и смежной образующей. Таким образом, многократно повторяя описанный цикл, получим множество точек, составляющее искомую геодезическую линию. Приводится математическое описание данного алгоритма.

**Ключевые слова:** начертательная геометрия; линейчатая поверхность; образующая; направление прокладки; конгруэнция направлений; геодезическая линия; точка пересечения.

**Information about authors:**

Umbetov Nurlan Sagynbekovich, doctorate of technical sciences, M. Auezov South Kazakhstan State University, Shymkent, Kazakhstan; nurlanumbetov@mail.ru; <https://orcid.org/0000-0002-1540-9410>

Dzhanabaev Zhaksylyk Zhumadilovich, Professor, doctor of pedagogy, M. Auezov South Kazakhstan State University, Shymkent, Kazakhstan; djanabaev@mail.ru; <https://orcid.org/0000-0002-0150-9963>

Ivanov Gennadii Sergeevich, Professor, doctor of engineering, Honored Scientist of the Russian Federation, Bauman Moscow State Technical University, Moscow, Russia; ivanov\_gs@rambler.ru; <https://orcid.org/0000-0002-8935-9495>

**REFERENCES**

- [1] Alexandrov P.S. *Curs lectii po analyticheskoi geometrii*. M.: Nauka, 1979. 572 p. (in Rus.).
- [2] Vanin V.V. *Geometricheskoe modelirovanie i postroenie razvertokkannyh pokrytii nerazvertyvavosiihsya pokrytii*: Dis. ... kand. tehn. nauk. Kiev. 1971. (in Rus.).
- [3] Vygodski M. *Differentsialnaya geometria*. M.-L.: Gostehizdat, 1949. 511 p. (in Rus.).
- [4] Gilbert D., Kon-Fossen C. *Naglyadnaya geometria*. M.: Nauka, 1981. 384 p. (in Rus.).
- [5] Glagolev N.A. *Zadacha o krachaisiei linii v proectciakh s chislovymi otmetkami* // *Mathematicheskii sbornik Moskovskogo matematicheskogo obsiestva*. Vol. XXXI. M., 1923 (in Rus.).
- [6] Ivanova L. *Modelirovanie ratsionalnyh form tkanevyh, setchatuh i kombinirovannyh pokrytii chislennymi metodami*: Dis. ... kand. tehn. nauk. Kiev, 1987 (in Rus.).
- [7] Kovalev S., Kharchenco A. *Chislennyi method postroenia geodesicheskoi linii na regul'arnoi poverhnosti* // *V knige prikladnaya geometria i inzhenernaya graphica*. Kiev: Budivelnic, 1978. Vol. 26. P. 24-25.
- [8] Korn G., Korn T. *Spravochnik po matematice dlia nauchnyh i inzhenernyh rabotnikov*. M.: Nauka, 1966. 831 p. (in Rus.).
- [9] Pavlenco G. *Osnovy konstruirovania geometrii korablya*. M.: Rechizdat, 1948 (in Rus.).
- [10] Ryzhov N. *O postroenii krachaisiei linii na a topographicheskoi poverhnosti* // *Trudy Moskovskogo seminaru po nachertatelnoi geometrii*. M.: Sov. nauka, 1958 (in Rus.).
- [11] Elkin L. *Construirovanie setei spetsialnyh linii tehnikeskikh poverhnostei dlia avtomatizirovannoi podgotovki upravlia i usiei informatcii ih vosproizvedeniia*: Dis. ... kand. tehn. nauk. Rostov-na-Donu, 1987 (in Rus.).
- [12] Scheffers S. *Lehrbuch der darstellendengeometrie*. Bd II. Berlin, 1920.
- [13] Umbetov N.S. *Chislennye metody postroeniya geodezicheskikh linii na tehnikeskikh poverhnostyakh*: Thesis abstract of candidate of technical sciences. Moskow, 1993 (in Rus.).
- [14] Bityukov U.I. *Geometricheskoe modelirovanie tehnologicheskikh protsessov namotki i vykladki konstrukticii iz voloknistykh kompozitsionnykh materialov*: Dis. ... doct. tehn. nauk. Omsk, 2011 (in Rus.).
- [15] Niteiskii A.S. *Konstruktivno-metricheskoe i differentsialno-geometricheskoe obrazovanie lineqchatykh poverhnostei* polos: Dis. ... kand. tehn. nauk. Omsk, 2013 (in Rus.).
- [16] Kalinin V.A. *Teoreticheskie osnovy geometricheskogo modelirovaniya protsessov namotki i vykladki konstrukticii iz voloknistykh kompozitsionnykh materialov*: Avtoref. dis. ... kand. tehn. nauk. Moskow, 1997 (in Rus.).
- [17] Kudryavtseva V.I., Udler E.M. *Chislennoe modelirovanie geometrii tentovykh shatrov na zhestkom kvadratnom konture*. M.: Fundamental researches, 2017. N 10-3. P. 466-470 (in Rus.).
- [18] Buhtyak M.S. *Linii na paraboloide, blizkie k geodezicheskim* // *Zhurnal Tomskogo gosudarstvennogo universiteta. Mathematician and mechanic*. 2015. N 6(38). P. 5-17.
- [19] Sinchev B., Mukhanova A.M. *The design of unique mechanisms and mashines* // *News of the national academy of sciences of the Republic of Kazakhstan. Series of geology and technical sciences*. ISSN 2224-5278. Vol. 1, N 427(2018). P. 111-117. <http://www.geolog-technical.kz/index.php/en/archive> <https://doi.org/10.32014/2018.2518-170X>.
- [20] Ozhikenov K.A., Rakhmetova P.M., Ozhiken A.K. *Investigation of the dynamics of the flight of the unmannedaerialvehicle* // *Bulletin of National academy of sciences of the Republic of Kazakhstan*. ISSN 1991-3494. Vol. 4, N 368(2017). P. 90-95. <http://www.bulletin-science.kz/index.php/en/arhive> <https://doi.org/10.32014/2018.2518-1467>.

---

**Publication Ethics and Publication Malpractice  
in the journals of the National Academy of Sciences of the Republic of Kazakhstan**

---

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct ([http://publicationethics.org/files/u2/New\\_Code.pdf](http://publicationethics.org/files/u2/New_Code.pdf)). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

[www:nauka-nanrk.kz](http://www.nauka-nanrk.kz)

**ISSN 2518-170X (Online), ISSN 2224-5278 (Print)**

<http://www.geolog-technical.kz/index.php/en/>

Верстка Д. Н. Калкабековой

Подписано в печать 06.02.2019.

Формат 70x881/8. Бумага офсетная. Печать – ризограф.

16,7 п.л. Тираж 300. Заказ 1.